



Available September, 2006.

36" Induction Drop-In Cooktop Specifications

- Product Weight – 56 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, fused on both sides of line with ground.
- Connected Load (kW Rating) – 240/208 Volts = 10.6 kW/9.6 kW
- Amps @ 240/208 Volts = 44.2/46.2 Amps
- Always consult local and/or national electric codes.
- Respect critical dimensions as noted for proper installation of cooktop.
- Allow 2" space below armored cable opening to clear electrical cable and allow space for installation of junction box on wall at back of cooktop.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- The absolute minimum horizontal distance between overhead cabinets installed to either side of the appliance must be no less than the maximum width of the appliance.
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- Allow 1-1/2" minimum clearance between rear edge of cutout and nearest combustible surface above countertop.
- Allow 7-1/2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- It is recommended that drawers not be used beneath cooktop.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.

NOTE: Refer to Product Installation Guide for detailed instructions on the web at electroluxusa.com.

Responsive Control

Affording you immediate responsiveness to temperature commands, the Infinite™ Cooking System incorporates a level of flexibility and sensitivity not found in traditional cooktops.

Precision Touch Controls

Fifteen preset touch settings provide a level of digital heat control that inspires confidence in even the most particular chef.

Keep-Warm Setting

For the discerning chef, the Keep-Warm setting maintains the perfect serving temperature directly on the cook surface. For increased safety, digital controls enable shut-off for up to eighteen hours or discretionary lockout from the off position.

Power Assist

Power Assist enables rapid heat acceleration with an immediate 25% increase in power. So, you'll bring large pots to a boil faster than ever before while minimizing energy consumption.

Cook Surface Sensors

The Infinite™ Cooking System creates heat only after sensing a pan* on the cooking surface. The cooking surface diameters respond to both the presence and precise size of a pan. The heat is transferred directly to the pan so the cooktop surface remains cool enough to clean up.

* A magnet must cling readily to the cookware for it to be used.

36" INDUCTION DROP-IN COOKTOP

Configuration _____ 5 Induction Zones


FEATURES

Black Vitroceramic Glass Surface	Yes
10" Zone – 2400 W/3200W	2
8" Zone – 2200 W/3000W	1
7" Zone – 1800 W/2300W	1
6" Zone – 1200 W/1500W	1
Precision Touch Controls	Yes

SPECIFICATIONS

Cutout Dimensions –	
Height	4-1/2"
Width	35-7/8" min. 36" max.
Depth	20-3/8" min. 20-1/2" max.
Power Supply Location	Middle Rear
Amps @ 240/208 Volts	44.2/46.2 Amps
Connected Load Rating - 240/208 Volts	10.6/9.6 kW
Electrical – Single phase 3- or 4- wire cable, 120/240 V or 120/208 V, 60 Hz, fused on both sides of line with ground.	Required
Armored Electrical Cable	Included
Product Weight	56 Lbs.
Shipping Weight	68 Lbs.
UPC (0-57112-)	09449-6

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxusa.com.

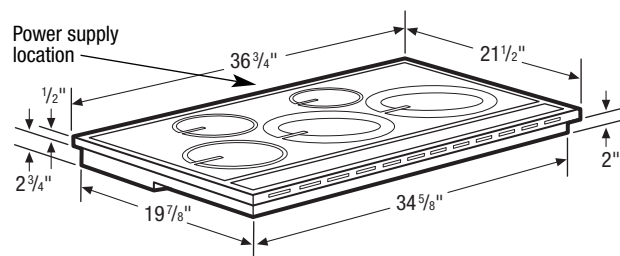

USA • 250 Bobby Jones Expressway • Augusta, GA 30907
1-877-4electrolux (1-877-435-3287) • electroluxusa.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4
1-800-668-4606 • electroluxca.com