

Sonance Symphony® Series SS_{TR}® Speakers



Symphony
S623SS_{TR}

Sonance Symphony SS_{TR}® Speakers

Sonance Symphony SS_{TR}® speakers combine the outputs of your amplifier's left and right stereo channels, and play both signals from just one speaker.

Offering the same quality features and performance as our Symphony In-Ceiling speakers, Sonance Symphony SS_{TR} speakers are ideal for use in hallways, bathrooms, closets, or any location where listeners will be moving around and a pair of stereo speakers would be impractical. The Symphony SS_{TR}'s innovative fully-pivoting design delivers outstanding musical performance from a wide variety of challenging installation locations.


Features:

- A single Symphony SS_{TR} speaker connects to both the left and right amplifier channels and reproduces the entire stereo signal.
- Fully-pivoting design directs sound at listeners, enhancing musical clarity even when placement options are limited.
- 6½" Woofers give the Symphony SS_{TR} speakers a small footprint that increases installation options.
- Advanced woofer cone materials for robust, low-distortion bass.
- Large woofer magnets increase output and power handling.
- 3-Position tweeter adjustment switch (S623SS_{TR}).
- RotoLock® mounting system makes installation quick and easy.
- Paintable aluminum grilles.
- Large connection terminals accept up to 14AWG speaker wire.
- Optional Retrofit Enclosure (part #92098) reduces sound spillover from rear of speaker into adjacent spaces.

SPECIFICATIONS

S623SS_{TR}


Tweeter	Two 1" (25mm) Silk domes, Ferrofluid cooled
Woofer	6½" (165mm) Carbon Fiber cone, rubber surround, dual voice coil, pivoting
Frequency Response	43Hz – 20kHz ±3dB
Impedance	8 Ohms nominal; 6 Ohms minimum
Power Handling	5 watts minimum; 135 Watts maximum
Sensitivity	90dB SPL (2.83V 1 meter)
Grille Material	Perforated Aluminum
Adjustments	±3dB tweeter level
Dimensions (Dia. x Depth)	9¾" (248mm) x 5³⁄₁₆" (132mm)
Cutout Diameter	8⁷⁄₃₂" (207mm)
Shipping Weight	5 lbs. (2.3 KG) Pair



Symphony S623_{SS}TR



S621SS_{TR}

Tweeter	Two ¾" (19mm) Silk domes, Ferrofluid-cooled
Woofer	6½" (165mm) Polypropylene cone, rubber surround, dual voice coil, pivoting
Frequency Response	50Hz – 20kHz ±3dB
Impedance	8 Ohms nominal; 6 Ohms minimum
Power Handling	5 watts minimum; 100 Watts maximum
Sensitivity	88dB SPL (2.83V 1 meter)
Grille Material	Perforated Aluminum
Adjustments	None
Dimensions (Dia. x Depth)	9¾" (248mm) x 5³⁄₁₆" (132mm)
Cutout Diameter	8⁷⁄₃₂" (207mm)
Shipping Weight	4.5 lbs. (2.0 KG) Each



Symphony S621_{SS}TR

DIMENSIONS (S623SS_{TR} and S621SS_{TR})

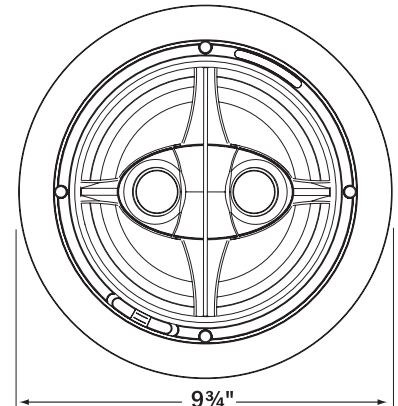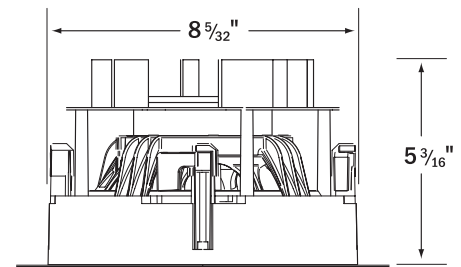

The Leader in Architectural Audio™

www.sonance.com

212 Avenida Fabricante
San Clemente, CA 92672-7531 USA
(800) 582-7777 or (949) 492-7777
FAX: (949) 361-5151
Technical Support: (800) 582-0772