


ROG BULWARK DOCK

User Manual

Model: DG300

Table of Contents


Package Contents

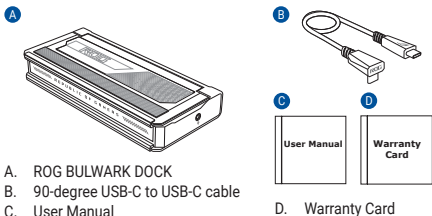

- A. ROG BULWARK DOCK
 B. 90-degree USB-C to USB-C cable
 C. User Manual

- D. Warranty Card

Product Overview

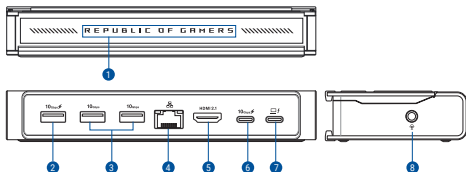

1. RGB lighting
2. USB 3.2 Gen 2 Type-A port (10Gbps/5.0V \equiv 1.5A)
3. USB 3.2 Gen 2 Type-A ports (10Gbps/5.0V \equiv 0.9A)
4. LAN (RJ-45) port (10/100/1000 Mbps)
5. HDMI™ 2.1 port
6. USB 3.2 Gen 2 Type-C® port (10Gbps/Input: 20V \equiv 7A, max. 140.0W)
7. USB 3.2 Gen 2 Type-C® upstream port (10Gbps/Output up to PD100W)
8. 3.5mm audio combo jack


Lighting effects

Dock with adapter	Notebook status	Lighting effects
Connected to power supply	N/A	Rainbow (default)
	Shutdown (S5)	
	Hibernate (S4)	
	Suspend (S3)	
	Powered on	
Disconnected from power supply	N/A	Off
	Shutdown (S5)	The lighting effect is based on the laptop's power status. When the laptop is powered, the default lighting effect is rainbow; when the laptop is not powered, there is no lighting.
	Hibernate (S4)	
	Suspend (S3)	

Specifications

Dimension	160 (L) x 74 (W) x 25.5 (H) mm
Cable length	250mm
Weight	335 ± 10g
Upstream port	USB 3.2 Gen 2 Type-C® with power delivery up to 100W (5.0V/9.0V/15.0V ≡ 3A, up to 20.0V ≡ 5A, 100.0W) * DG300 supports smart power function: a. When all downstream ports are connected, DG300 provides up to 70W of power to devices using a 100W adapter. b. When downstream ports are disconnected, DG300 provides up to 100W of power to devices using a 100W adapter. c. For better experience, we suggest using an AC140-01 ROG 140W USB-C GaN charger, which allows the DG300 to provide up to 100W of power to devices, regardless of whether all downstream ports are connected or disconnected.
Downstream ports	Rear side: 2. USB 3.2 Gen 2 Type-A port (10Gbps/5.0V ≡ 1.5A) 3. USB 3.2 Gen 2 Type-A port (10Gbps/5.0V ≡ 0.9A) x 2 4. LAN(RJ-45) port (10/100/1000 Mbps) 5. HDMI™ 2.1 port (with a maximum output resolution of 3840x2160@144Hz or 7680x4320@30Hz) 6. USB 3.2 Gen 2 Type-C® port (10Gbps/Input: 20.0V ≡ 7A, max. 140.0W) * For better performance, it's recommended to use a charger with a minimum output of 130W. Right side: 8. 3.5mm audio combo jack
Output power	With a 100W or higher adapter (self-powered): UFP 20.0V, 5A; Total DFP USB-A 5.0V ≡ 1.5A Without a 100W or higher adapter (BUS-powered): Total DFP USB-A 5.0V ≡ 1.5A
Operation temperature	0 °C ~ 35 °C
Storage temperature	-30 °C ~ 70 °C
Supported Operating System	Windows® OS (Windows® 10 or above)/MacOS
RGB lighting	• Rainbow (default lighting effect) • The LED lights up when the dock is powered, whether it's self-powered or BUS-powered.

Using your ROG BULWARK DOCK

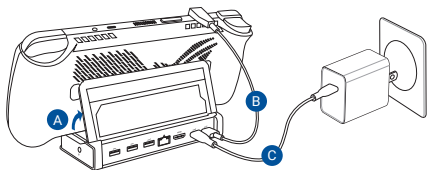

To use your ROG BULWARK DOCK:

- Adjust the free-angle flip cover to position your USB-C® handheld or mobile device.
- Connect the bundled USB Type-C® cable to your device (including handheld, Mobile Phone and Notebook PC) and DG300.
- Connect DG300 to an AC/DC adapter using another USB-C® cable.
- Connect other accessories, such as keyboards, mice, joystick dongles, and external monitors to fulfill expansion needs.

To update the firmware and customize your ROG BULWARK DOCK:

- Connect DG300 to your computer or Windows system using the bundle cable.
- Please go to <https://www.asus.com>, search **ROG BULWARK DOCK** and download the latest firmware under **Support > Driver & Utility** of product information.
- Customize your DG300 using Armoury Crate.

NOTES:

- For the best user experience, please ensure that the USB Type-C® port on your device (Notebook PC/Tablet/Mobile Phone) offers with full functionality (charging/data transfer/video output).
- Make sure that the USB Type-C® port on your Notebook PC supports Alt Mode Display.
- Visit the ASUS website for the product compatibility list.

Federal Communications Commission Statement

This device has been tested and found to comply with the limits for a Class B device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with manufacturer's instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference; and
- This device must accept any interference received including interference that may cause undesired operation.

NOTE: Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.



This is a Class B product, in a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

English [Simplified EU Declaration of Conformity](#)

ASUSTeK Computer Inc. hereby declares that this device is in compliance with the essential requirements and other relevant provisions of related Directives. Full text of EU declaration of conformity is available at: www.asus.com/support

Français [Déclaration simplifiée de conformité de l'UE](#)

AsusTek Computer Inc. déclare par la présente que cet appareil est conforme aux critères essentiels et autres clauses pertinentes des directives concernées. La déclaration de conformité de l'UE peut être téléchargée à partir du site Internet suivant: www.asus.com/support.

Deutsch [Vereinfachte EU-Konformitätserklärung](#)

ASUSTeK Computer Inc. erklärt hiermit, dass dieses Gerät mit den wesentlichen Anforderungen und anderen relevanten Bestimmungen der zugehörigen Richtlinien übereinstimmt. Der gesamte Text der EU-Konformitätserklärung ist verfügbar unter: www.asus.com/support.

Italiano [Dichiarazione di conformità UE semplificata](#)

ASUSTeK Computer Inc. con la presente dichiara che questo dispositivo è conforme ai requisiti essenziali e alle altre disposizioni pertinenti con le direttive correlate. Il testo completo della dichiarazione di conformità UE è disponibile all'indirizzo: www.asus.com/support.

Русский Упрощенное заявление о соответствии европейской директиве

Компания ASUS заявляет, что это устройство соответствует основным требованиям и другим соответствующим условиям соответствующих директив. Подробную информацию, пожалуйста, смотрите на www.asus.com/support.

Čeština Zjednodušené prohlášení o shodě EU

Společnost ASUSTeK Computer Inc. tímto prohlašuje, že toto zařízení splňuje základní požadavky a další příslušná ustanovení souvisejících směrnic. Plné znění prohlášení o shodě EU je k dispozici na adrese: www.asus.com/support.

Magyar Egyszerűsített EU megfelelési nyilatkozat

Az ASUSTeK Computer Inc. ezennel kijelenti, hogy ez az eszköz megfelel a kapcsolódó irányelvek lényeges követelményeinek és egyéb vonatkozó rendelkezéseinek. Az EU megfelelési nyilatkozat teljes szövege innen letölthető: www.asus.com/support.

Polski Uproszczona deklaracja zgodności UE

Firma ASUSTeK Computer Inc. niniejszym oświadcza, że urządzenie to jest zgodne z zasadniczymi wymogami i innymi właściwymi postanowieniami powiązanych dyrektyw. Pełny tekst deklaracji zgodności UE jest dostępny pod adresem: www.asus.com/support.

Português Declaração de Conformidade Simplificada da UE

A ASUSTeK Computer Inc. declara que este dispositivo está em conformidade com os requisitos essenciais e outras disposições relevantes das Diretivas relacionadas. Texto integral da declaração da UE disponível em: www.asus.com/support.

Română Declarație de conformitate UE, versiune simplificat

ASUSTeK Computer Inc. declară că acest dispozitiv se conformează cerințelor esențiale și altor prevederi relevante ale directivelor conexe. Textul complet al declarației de conformitate a Uniunii Europene se găsește la: www.asus.com/support.

Slovensky Zjednodušené vyhlásenie o zhode platné pre EÚ

Spoločnosť ASUSTeK Computer Inc. týmto vyhlasuje, že toto zariadenie vyhovuje základným požiadavkám a ostatným príslušným ustanoveniam príslušných smerníc. Celý text vyhlásenia o zhode pre štáty EÚ je dostupný na adrese: www.asus.com/support.

Slovenščina Poenostavljena izjava EU o skladnosti

ASUSTeK Computer Inc. izjavlja, da je ta naprava skladna z bistvenimi zahtevami in drugimi ustreznimi določbami povezanih direktiv. Celotno besedilo EU-izjave o skladnosti je na voljo na spletnem mestu: www.asus.com/support.

Español Declaración de conformidad simplificada para la UE

Por la presente, ASUSTeK Computer Inc. declara que este dispositivo cumple los requisitos básicos y otras disposiciones pertinentes de las directivas relacionadas. El texto completo de la declaración de la UE de conformidad está disponible en: www.asus.com/support.

Türkçe Basitleştirilmiş AB Uyumluluk Bildirimi

AsusTek Computer Inc., bu aygıtın temel gereksinimlerle ve ilişkili Yönergelerin diğer ilgili koşullarıyla uyumlu olduğunu beyan eder. AB uygunluk bildiriminin tam metni şu adreste bulunabilir: www.asus.com/support.

Українська Спрощена декларація про відповідність нормам ЄС

ASUSTeK Computer Inc. заявляє, що цей пристрій відповідає основним вимогам та іншим відповідним положенням відповідних Директив. Повний текст декларації відповідності стандартам ЄС доступний на: www.asus.com/support.

Simplified UKCA Declaration of Conformity

ASUSTek Computer Inc. hereby declares that this device is in compliance with the essential requirements and other relevant provisions of related Regulations. Full text of UKCA declaration of conformity is available at: <https://www.asus.com/support/>.

ASUS Recycling/Takeback Services

ASUS recycling and takeback programs come from our commitment to the highest standards for protecting our environment. We believe in providing solutions for you to be able to responsibly recycle our products, batteries, other components, as well as the packaging materials. Please go to <https://esg.asus.com/en/Takeback.htm> for the detailed recycling information in different regions.



DO NOT throw the product in municipal waste. This product has been designed to enable proper reuse of parts and recycling. This symbol of the crossed out wheeled bin indicates that the product (electrical and electronic equipment) should not be placed in municipal waste. Check local regulations for disposal of electronic products.

이 기기는 가정용 (B 급) 으로 전자파적합등록을 한 기기로서 주로 가정에서 사용하는 것을 목적으로하며, 모든 지역에서 사용할 수 있습니다.

1. Accessory Instruction: Provided with each unit or smallest package with installation instructions: "For use only with UL Listed I.T.E." or equivalent.
2. This product should be connected by means of a power cord to a socket-outlet with earthing connection.

If the device supplies power to other devices via a non-removable USB Type-C cable, the other devices shall be provided with fire enclosures.

Официальное представительство в России

Горячая линия Службы технической поддержки в России:

Бесплатный федеральный номер для звонков по России: 8-800-100-2787

Номер для пользователей в Москве: +7(495)231-1999

Время работы: Пн-Пт, 09:00 - 21:00 (по московскому времени)

Официальные сайты ASUS в России:

www.asus.ru

www.asus.com/ru/support

Informations sur le tri et le recyclage en France



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !

CAN ICES (B)/NMB (B)

注意!

- 萬用擴充塢只應在溫度為 0°C (32°F) 至 35°C (95°F) 的環境下使用。
- 請依照萬用擴充塢底部的電源功率貼紙說明使用正確的電源變壓器，若使用錯誤功率的電源變壓器有可能造成內部零件的損壞。
- 變壓器正在使用時可能會發出高熱，當變壓器連接外部電源時，請勿以其他物品覆蓋變壓器，並將變壓器遠離身體。

「產品之限用物質含有情況」之相關資訊，請參考下表

單元	限用物質及其化學符號					
	鉛 (Pb)	汞 (Hg)	鎘 (Cd)	六價鉻 (Cr ^{VI})	多溴聯苯 (PBB)	多溴二苯醚 (PBDE)
印刷電路板及電子組件	—	○	○	○	○	○
結構組件(金屬/塑膠)	—	○	○	○	○	○
連接線	○	○	○	○	○	○
散熱設備	—	○	○	○	○	○
其他配件(如電源供應器, 電源線等)	—	○	○	○	○	○

備考 1. “○” 係指該項限用物質之百分比含量未超出百分比含量基準值。
備考 2. “—” 係指該項限用物質為排除項目。

HDMI®

HIGH-DEFINITION MULTIMEDIA INTERFACE

FCC COMPLIANCE INFORMATION

Per FCC Part 2 Section 2.1077



Responsible Party: **Asus Computer International**
Address: **48720 Kato Rd, Fremont, CA 94538**
Phone/Fax No: **(510)739-3777/(510)608-4555**

hereby declares that the product

Product Name : **Docking Station**
Model Number : **DG300**

compliance statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WH 18020



U11342918

Authorized distributors in Turkey

PENTA TEKNOLOJI URUNLERI DAGITIM TICARET A.S.

Address, City: DUDULLU ORGANIZE SANAYI
BOLGESI NATO YOLU 4.CAD. NO:1
DUDULLU UMRANIYE 34775 ISTANBUL TURKEY

Distributor Tel: 0216 645 82 00

Country: TURKEY

Bilkom Bilişim Hizmetleri A.Ş.

Address: Mahir İz Cad. No:26 K:2 Altunizade Üsküdar İstanbul - Türkiye

Distributor Tel: +90 216 554 9000

Country: TURKEY

Authorized representative in United Kingdom

ASUSTEK (UK) LIMITED

Address: 1st Floor, Sackville House, 143-149 Fenchurch Street, London, EC3M
6BL, England, United Kingdom

Manufacturer: ASUSTeK COMPUTER INC.

Address: 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112

Manufacturer Tel: 886-2-2894-3447

Authorized Representative in Europe

ASUS COMPUTER GmbH

Address: Harkortstrasse 21-23, 40880 Ratingen, Germany

C5 Elektronik Sanayi Ve Ticaret A.Ş.

Address: Sahrayıcedit Mah. Omca Sok. Golden Plaza No:33 E Blok Kat: 2
Kadıköy/İSTANBUL

Distributor Tel: +90 (216) 411 44 00

Country: TURKEY

AEEE Yönetmeliğine Uygundur.

დამზადებულია ჩინეთში

მწარმოებელი

ASUSTeK Computer Inc.

1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112

ტელეფონი: +886-2-2894-3447

Di-Impor oleh:

PT. ASUS TECHNOLOGY INDONESIA JAKARTA

The Kensington Office Tower, Lt. 16, Jl. Boulevard Raya No.1, RT.1/RW.2, Desa/
Kelurahan Kelapa Gading Timur, Kec. Kelapa Gading, Kota Adm. Jakarta Utara,
Provinsi DKI Jakarta, Kode Pos: 14240