



Power packs for custom application—cabinet mount.
Electronic push button controls with LED.
Four ventilation speeds.

Two-intensity exclusive PURLED™ lighting: two 5.5 watt LED modules (included).
5-minute delay function.
Dishwasher-safe low-profile baffle filters.
Filter maintenance indicator.

Heat Sentry™ detects excessive heat and adjusts speed to high automatically.

Model Numbers:

CC65I28SB


CC67I28SB



PURLED™ light system boosts light output, distributes light better and improves energy-efficiency.



Backlit electronic push button controls.



Easy-to-install low-profile baffle filters.

Hood Sizes

Widths	28-1/8"
Depth	14-3/4"

Finish

Stocked	Brushed Stainless Steel
Special Order	Not Available

Features

Lighting Type	PURLED™ 5.5 watt, 1100 Lumens, 3000K
Number of Lamps	2
Lighting Levels	2
Lighting Lamps Included	Yes
Control Type	4-speed Electronic Push Button
Control Features	Heat Sentry™, Delay-off
Remote Control	Not Available
Filter Type	Mini Baffle
Non-ducted Capability	No

Hood Blower Included


Internal	CC65	CC67
	Single	Dual
Blower CFM Vertical	210/600	370/1000
Sones	1.1/8.5	1.5/12.0

Accessories


Custom Liners	30"–ALCC630SB, 36"–ALCC636SB, 42"–ALCC642SB
CFM Reducer Kit	ARP310 (for use with CC65)

Installation Requirements

Amps @ 120V	6.0/9.5
Electrical	Direct Wire
Duct Size: Internal Blower	3-1/4" x 10" V or H 10" round / Vertical only
Backdraft Damper	Included

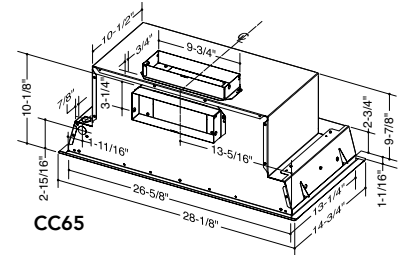

CC65

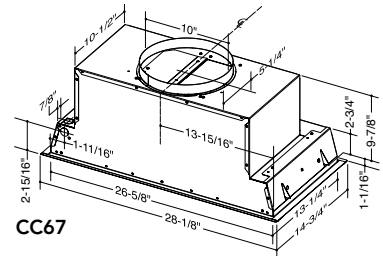

CC67

Installation height above the cooking surface: 24"–30"

For more details see the product specifications sheet found at www.BESTRangeHoods.com

