

SLIDE-IN ELECTRIC RANGES

SLIDE-IN ELECTRIC RANGE FEATURES AND SPECIFICATIONS						
MODEL #	Electric Conventional		Electric Downdraft			
	JES8750BA	JES8850BA	JES9750BA	JES9800BA	JES9860BA	JES9900BA
Overall Height (in)	35 3/4-36 1/8	35 3/4-36 1/8	35 3/4-36 1/8	35 3/4-36 1/8	35 3/4-36 1/8	35 3/4-36 1/8
Overall Width (in)	30 3/4	30 3/4	30 3/4	30 3/4	30 3/4	30 3/4
Overall Depth ^A (in)	26 3/8	26 3/8	26 3/8	26 3/8	26 3/8	26 3/8
Oven Capacity (cu. ft.)	4.5	4.5	4.3	4.3	4.3	4.3
Oven Element/Broil Element Wattage ^B	2,800/3,600	2,800/3,600	2,400/3,600	2,400/3,600	2,400/3,600	2,400/3,600
Total Connected Load ^C -KW (see chart below)	11.4	13.0	10.3	11.4	10.3	11.4
Jenn-Air Platinum Warranty	•	•	•	•	•	•
Cooking Surface Features						
Easy-to-Clean Glass-Ceramic Surface	•	•		•		•
Quick-Start™ Radiant Elements ^D	2	1		3		
Triple-Choice™ Radiant Element ^D	1	1				
Dual-Choice™ Radiant Element ^D	1			1		1
CustomControl Dual Radiant Element ^D		1				1
Cook and Warm Radiant Element ^D		1				2
Warming Center™ Radiant Element ^D	1	1				
Hot Surface Indicator Lights	4	4		4		4
Downdraft Ventilation ^E			Two Speed	Two Speed	Two Speed	Two Speed
Grill Assembly Included ^E with Excalibur® Nonstick Finish			•		•	
Accepts Inter-Changeable Cartridges and Grill Accessories ^E			•		•	
Oven Features						
Two-Speed MultiMode® Convection with Convection Element ^F		•		•	•	•
Bake/Broil Oven with Variable Temperature Broiling	•	•	•	•	•	•
Temperature-Controlled Preheat	•	•	•	•	•	•
Hidden Bake Element	•	•				
8-Pass Recessed Broil Element	•	•	•	•	•	•
CustomClean™ Self-Cleaning w/ Adjustable Levels and Automatic Lock	•	•	•	•	•	•
Heavy-Duty Oven Racks ^G	2	3	2	3	3	3
Automatic Halogen Oven Light	•	•	•	•	•	•
Warming Drawer		•				
Control Features						
Menu-Driven Electronic Controls with Prompts	•	•	•	•	•	•
Electronic Clock with Two Timers	•	•	•	•	•	•
Automatic Convection Conversion ^H		•		•	•	•
Favorite Settings Memory Option ^I	•	•	•	•	•	•
Cook & Hold Option ^J	•	•		•	•	•
Delay Start Cooking and Cleaning	•	•	•	•	•	•
Bread Proofing Feature		•		•	•	•
Keep Warm™ Feature ^I	•	•	•	•	•	•
Programmable Food Temperature Probe		•		•	•	•
Control Lockout	•	•	•	•	•	•
Control Setup Options ^K	•	•	•	•	•	•
Sabbath Mode	•	•	•	•	•	•
Exterior Features						
Stylish Curved Front Design	•	•	•	•	•	•
Floating Glass Front	B,F	B,F,Q	B,W	B,F,N	B,W	B,F
Extra-Large Panaview™ Oven Window	•	•	•	•	•	•
Stainless Steel Towel Bar Handle	•	•	•	•	•	•
Spacious Storage Drawer	•					
Accepts Optional Backsplash and Side Panel ^L	•	•	•	•	•	•
Color Indicators (add to end of model number)	B,F,S	B,F,Q,S	B ¹ ,W ¹ ,S ¹	B,F,N,S	B ¹ ,W ¹ ,S ¹	B,F,S
B=Black (Textured Black Glass Cooking Surface)						
W=White (Textured White on Black Glass Cooking Surface)						
F= Frost White (True White Glass Cooking Surface)						
Q=Bisque (Textured Bisque on Black Glass Cooking Surface)						
N=Natural Bisque (True Bisque Glass Cooking Surface)						
S=Stainless Steel (Textured Black Glass Cooking Surface)						
¹ Textured Black Glass Radiant Element Cartridge, Textured White on Black Glass Radiant Element Cartridge, or Porcelain Coil Element Cartridge in Black, White or Stainless Steel required. See Range Cartridge and Accessory chart on page 133 for model numbers.						
Available in Canada		JES8850BC B/F/S			JES9860BC	JES9900BC
Approximate Shipping Weight (lbs./kg)	174/79	216/98	171/77	192/87	171/77	192/87

- Feature included
- A. Add approximately 2" for door handle. Dimension given is from wall to front of oven door. Depth with oven door open is 49 3/8".
- B. Jenn-Air® electric ranges feature an 8-pass recessed broil element.
- C. All electric models are UL listed for 3-wire, 120/240VAC.
- D. Model JES8750B has 2, 6" 1200W elements, 1 9"/6" 2400W/700W Dual-Choice™ element, 1 12"/9"/6" 2700/2000/1000W Triple-Choice™ element, and 1, 6" 100W Warming Center™ element. Model JES8850B has 1, 6" 1200W element, 1, 6" 1200W Cook & Warm element that reduces to 35W, 1, 9"/6" 3,000/1400W CustomControl dual element, 1 12"/9"/6" 2700/2000/1000W Triple-Choice™ element, and 1, 6" 100W Warming Center™ element. Model JES9800B has 2, 6" 1200W elements, 1 9" 2500W element, and 1 9"/6" 2400W/700W Dual-Choice™ element. Model JES9900B has 2, 6" 1200W Cook & Warm elements that reduce to 35W, 1, 9"/6" 2400/700W Dual-Choice™ element, and 1, 9"/6" 3,000/1400W CustomControl dual element.
- E. Models JES9750B and JES9860B are shipped with a 1900W electric grill assembly and require the purchase of a radiant or coil element cartridge for the right bay. These models also accept optional electric griddle and electric grill cover accessories. All electric range models accept the optional Wok accessory. See the Range Cartridge and Accessory chart on page 133 for model numbers.
- F. MultiMode® convection options include Convection Bake, Convection Roast, and Convection Pastry. Convection air is also used with the Drying and Thaw & Serve options. For drying, an optional high-quality drying rack is available as an accessory. Order model # DRYINGRACK.
- G. An optional Create-A-Space™ half-rack is available as an accessory. This is a full-width rack that may be converted to a half-rack.
- H. The Automatic Convection Conversion feature takes the guesswork out of convection cooking by automatically converting standard cooking temperature/time to the correct settings for convection cooking.
- I. The Favorite Settings option ensures consistent results every time by allowing you to name, program and save the cook time, oven temperature and cooking method for up to 10 of your favorite recipes.
- J. The Cook & Hold option keeps food warm for up to one hour after the cook time has expired. The oven automatically turns off after to one hour Hold time has expired.
- K. Several control setup options may be customized including, but not limited to, language option of English, French or Spanish, Fahrenheit or Celsius temperature display, and an Energy Saver option that allows the control display to go dark when the oven is not in use.
- L. Jenn-Air® slide-in ranges may be used in a free-standing installation. In a free-standing installation a backslash and a side panel (if either side is exposed) are required. See the Range Cartridge and Accessories chart on page 133 for model numbers.

CIRCUIT PROTECTION SPECIFICATION GUIDE

Recommended Minimum		
K.W. Rating	Circuit Protection	Wire Size
On Serial Plate	In Amperes	AWG
0 – 4.8	20	12
4.9 – 6.9	30	10
7.0 – 9.9	40	8
10.0 – 11.9	50	8
12.0 – 14.9	60	6

INTERIOR OVEN DIMENSIONS

MODEL #	JES8750BA, JES8850BA, JGS8750BD, JGS8850BD, JGS8860BD, JGS9900BD, JDS8850BA	JES9750BA, JES9800BA, JES9860BA, JES9900BA, JDS9860BD, JDS9865BD
Height (in)	18	17 1/4
Width (in)	23	23
Depth (in)	18 5/8	18 5/8

SLIDE-IN GAS AND DUAL-FUEL RANGE FEATURES AND SPECIFICATIONS							
MODEL #	Gas Conventional	Gas Conventional	Pro-Style® Gas Conventional	Gas Downdraft	Dual-Fuel Conventional	Dual-Fuel Downdraft	Pro-Style® Dual-Fuel Downdraft
	JGS8750BD	JGS8850BD	JGS8860BD	JGS9900BD	JDS8850BD	JDS9860BD	JDS9865BD
Overall Height (in)	35 ¾-36 ⅞	35 ¾-36 ⅞	35 ¾-36 ⅞	35 ¾-36 ⅞	35 ¾-36 ⅞	35 ¾-36 ⅞	35 ¾-36 ⅞
Overall Width (in)	30 ¾	30 ¾	30 ¾	30 ¾	30 ¾	30 ¾	30
Overall Depth ^A (in)	26 ⅜-16	26 ⅜-16	26 ⅜-16	26 ⅜-16	26 ⅜-16	26 ⅜-16	26 ⅜-16
Oven Capacity (cu. ft.)	4.5	4.5	4.5	4.3	4.5	4.3	4.3
Burner BTU (natural gas) ^B RF	16,000	16,000	16,000	16,000	16,000	16,000	16,000
RR	9,200	5,000	5,000	5,000	5,000	5,000	5,000
LF	9,200	15,000/3,000 (EvenThree™)	15,000/3,000 (EvenThree™)	15,000/3,000 (EvenThree™)	15,000/3,000 (EvenThree™)	8,000	8,000
LR	5,000	9,200	9,200	9,200	9,200	8,000	8,000
Oven Burner/Broil Burner BTU	18,000/13,000	18,000/13,000	18,000/13,000	16,000/13,000			
Oven Element/Broil Element Wattage					2,800/3,600	2,400/3,600	2,400/3,600
Total Connected Load ^C -KW (see chart on pg. 124)					3.6KW/240V	3.6KW/240V	3.6KW/240V
Jenn-Air Platinum Warranty	•	•	•	•	•	•	•
Dual-Fuel Model with Gas Cooktop and Electric Oven					•	•	•
Cooking Surface Features							
Sealed Gas Burners ^D	•	•	•	•	•	•	•
Glass-Ceramic Surface				•			
Ultra High Output 16,000 Burner	•	•	•	•	•	•	•
Ultra Low Output 650 Burner	•	•	•	•	•	•	•
EvenThree™ Burner ^D		•	•	•	•		
Electronic Ignition	•	•	•	•	•	•	•
Flame-Sensing™ Automatic Re-ignition	•	•	•	•	•		
Porcelain-On-Cast-Iron Burner Grates	•	•	•	•	•	•	•
Downdraft Ventilation				Two-Speed		Two Speed	Two Speed
Grill Assembly Included with Excalibur® Nonstick Finish						•	•
Accepts Inter-Changeable Two-Burner Module and Grill Accessories ^E						•	•
Oven Features							
MultiMode® Convection with Convection Element ^F		One-Speed	One-Speed	One-Speed	Two-Speed	Two-Speed	Two-Speed
Bake/Broil Oven with Variable Temperature Broiling	•	•	•	•	•	•	•
Temperature-Controlled Preheat	•	•	•	•	•	•	•
Hidden Bake Element					•		
8-Pass Recessed Broil Element					•	•	•
CustomClean™ Self-Cleaning w/ Adjustable Levels and Automatic Lock	•	•	•	•	•	•	•
Heavy-Duty Oven Racks ^G	2	3	3	3	3	3	3
Automatic Halogen Oven Light	•	•	•	•	•	•	•
Warming Drawer		•	•		•		
Control Features							
Menu-Driven Electronic Controls with Prompts	•	•	•	•	•	•	•
Electronic Clock with Two Timers	•	•	•	•	•	•	•
Automatic Convection Conversion ^H		•	•	•	•	•	•
Favorite Settings Memory Option ^I	•	•	•	•	•	•	•
Cook & Hold Option ^J	•	•	•	•	•	•	•
Delay Start Cooking and Cleaning	•	•	•	•	•	•	•
Bread Proofing Feature		•	•	•	•	•	•
Keep Warm™ Feature	•	•	•	•	•	•	•
Programmable Food Temperature Probe		•	•	•	•	•	•
Control Lockout	•	•	•	•	•	•	•
Control Setup Options ^K	•	•	•	•	•	•	•
Sabbath Mode	•	•	•	•	•	•	•
Exterior Features							
Stylish Curved Front Design	•	•		•	•	•	
Floating Glass Front	B,W	B,W,Q		B,F	B,W	B,W	
Pro-Style® Design			•				•
Extra-Large Panaview™ Window	•	•	•	•	•	•	•
Stainless Steel Towel Bar Handle	•	•	with Diamond-Etched Grip	•	•	•	with Diamond-Etched Grip
Spacious Storage Drawer	•						
Slide-In Design	•	•	•	•	•	•	•
Blends with Cabinets and Counters	•	•	•	•	•	•	•
Accepts Optional Backsplash and Side Panel ^L	•	•	•	•	•	•	•
Color Indicators (add to end of model number)							
B=Black; W=White; F=Frost White; Q=Bisque; S=Stainless Steel; P=Pro-Style® Stainless Steel	B ¹ , W ¹ , S ¹	B ¹ , W ¹ , Q ¹ , S ¹	P ¹	B ² , F ² , S ²	B ¹ , W ¹ , S ¹	B ¹ , W ¹ , S ¹	P ¹
¹ Black, White & Bisque have porcelain cooking surface;							
Stainless Steel and Pro-Style have stainless steel cooking surface							
² Black and Stainless Steel have textured black glass cooking surface,							
Frost White has true white cooking surface							
All models have black satin-matte burner grates and caps							
Available in Canada	•	B,W,S	•	•	•	•	•
Approximate Shipping Weight (lbs./kg)	198/90	210/95	210/95	220/99	205/93	205/93	205/93

SLIDE-IN RANGES

NOTES FROM PAGE 125 SLIDE-IN GAS/DUAL FUEL RANGES

- Feature included
- A. Add approximately 2" for door handle. Dimension given is from wall to front of oven door. Depth with oven door open is 49 3/8".
- B. BTU rates given are for natural gas. BTU rates will vary slightly when LP gas is used, High/Low burner ratings: 16,000/1,600; 15,000/750; 9,200/1,200; 5,000/650.
- C. Gas models are 120 VAC. Dual-fuel models are UL listed for 3-wire, 120/240 VAC and require a separate gas supply.
- D. The EvenThree™ burner offers 15,000 BTU on high with both rings lit and 3,000 BTU on high with the inner ring only lit. Low turn down rates are 750 BTU with only the inner ring lit.
- E. Models JDS9860B and JDS9865B include a gas grill assembly with Even Heat™ grill burner that may be used in the left bay only and two sealed gas burners. A two-burner module may be purchased to use in place of the grill. BTU ratings for the two-burner module in the grill bay are 8,500 BTUs for each burner. These models also accept optional gas griddle and gas grill cover accessories. All gas and dual-fuel range models accept the optional AO142 Wok accessory. A Wok Ring accessory is also available (not for use with the AO142 Wok). See the Range Cartridge and Accessory chart on page 133 for model numbers.
- F. Range models JGS8850B, JGS8860B and JGS9900B feature Convection Bake, Convection Roast and Convection Pastry plus a Drying Option. Dual-Fuel range models JDS8850B, JDS9860B and JDS9865B feature Convection Bake, Convection Roast and Convection Pastry plus a Drying option and Thaw & Serve option. For drying, an optional high-quality drying rack is available as an accessory. Order model # DRYINGRACK.
- G. An optional Create-A-Space™ is available as an accessory. This is a full-width rack that may be converted to a half-rack.


- H. The Automatic Convection Conversion feature takes the guesswork out of convection cooking by automatically converting standard cooking temperature/time to the correct settings for convection cooking.
- I. The Favorite Settings option ensures consistent results every time by allowing you to name, program and save the cook time, oven temperature and cooking method for up to 10 of your favorite recipes.
- J. The Cook & Hold option keeps food warm for up to one hour after the cook time has expired. The oven automatically turns off after to one hour Hold time has expired.
- K. Several control setup options may be customized including, but not limited to, language option of English, French or Spanish, Fahrenheit or Celsius temperature display, and an Energy Saver option that allows the control display to go dark when the oven is not in use.
- L. Jenn-Air® slide-in ranges may be used in a free-standing installation. In a free-standing installation a backsplash and a side panel (if either side is exposed) are required. See the Range Cartridge and Accessories chart on page 133 for model numbers.

Excalibur® is a registered trademark of Whitford B.V. Corp.

See chart on page 133 for cartridge and accessory usage.

All Jenn-Air® appliances are appropriately UL, AGA, CSA, or CGA approved.

ELECTRIC, GAS AND DUAL-FUEL SLIDE-IN RANGE DIMENSION DIAGRAMS

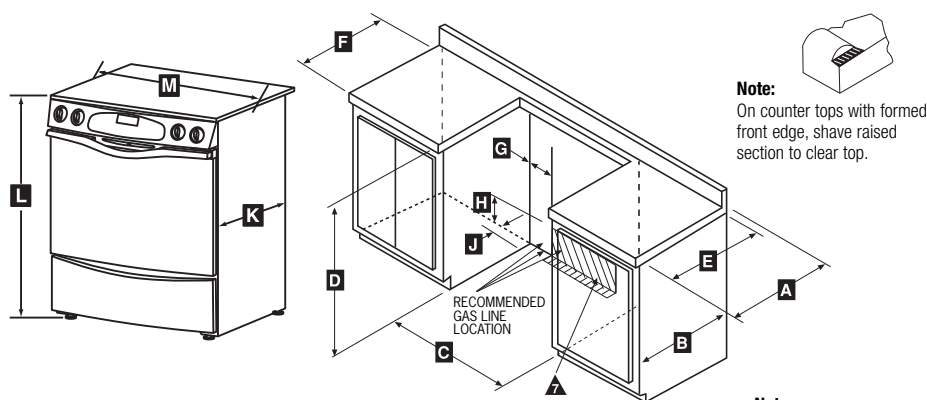

JES9900BA, JGS8860BD, JGS9900BD,
JES8750BA, JGS8850BA, JES9750BA,
JES9800BA, JGS9860BA, JGS8750BD,
JGS8850BD, JDS8850BA,
JDS9860BA, JDS9865AAP

Dimensions		
	in	cm
A	25	63.5
B	24	61.0
C	30	76.2
D ¹	36	91.4
E ²	23 3/4	60.0
F ³	23 1/4	59.0
G	5 1/2 each side	14.0
H	10	25.4
J	2 1/4	5.7
K ⁴	26 1/16	66.5
L ⁵	35 3/4	90.8
M	30 3/4	78.1


Notes:

- Before attempting installation, adjust range leveling legs to accommodate this dimension.
- Minimum flat area.
- Cut depth. When replacing an existing unit, a maximum cut depth of 23 1/2" (59.7 cm) is acceptable. If the cut depth exceeds 23 1/2", use filler kit, K71FILL.
- Dimension K is from the wall to the side edge of the oven door. It does not include the curvature of the glass or the depth of the handle. The depth dimension including the curvature of the glass and door handle is 29 3/8".
- Dimension L is with the leveler legs adjusted all the way in. This may vary slightly upon leveling leg adjustment.
- Do not use grout, epoxy, etc., to install this unit. Installation must allow for removal of this appliance from the installed location for purposes of servicing.
- Provide for either a 3-wire or 4-wire 120/208, 120/240 volt outlet per

applicable cord in shaded area shown. Refer to installation instructions for proper positioning of outlet.

- Side Clearance - Ranges installed near a side wall must allow a minimum clearance of 3" (7.5 cm).
- Overhead Cabinetry - Provide 30" (76.2 cm) minimum vertical clearance between cooking surface and construction above the appliance. Allow 13" (33.02 cm) maximum depth of cabinets installed above cooking surface.
- A slide-in range, if equipped with optional backguard kit, may be installed zero inches from wall. For freestanding range look, must use optional backguard kit and optional side panel kits.
- Downdraft ranges can be vented to the equivalent of 60 feet. See installation instructions for downdraft ventilation.
- Gas models are convertible to LP gas. Components are supplied with range, however it is recommended a qualified servicer perform the conversion.

GAS CONNECTION

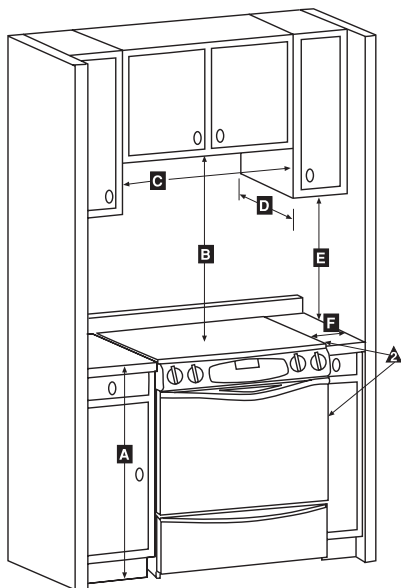

JES9900BA, JGS8860BD, JGS9900BD,
JES8750BA, JGS8850BA, JES9750BA,
JES9800BA, JGS9860BA, JGS8750BD,
JGS8850BD, JDS8850BA,
JDS9860BA, JDS9865AAP

Dimensions		
	in	cm
A	36	91.4
B	30 min.	76.2
C	30	76.2
D ¹	13 max.	33
E	18 min.	45.7
F	3 min.	7.6

Notes:

- Depth of cabinets above cooktop.
- 0" clearance between adjacent combustible construction and the back and sides of the range below the cooking surface.

These appliances have been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194°F. If these appliances are installed with cabinets that have a lower working temperature than 194°F, discoloration, delamination or melting may occur.

Caution: Some white European style cabinets are equipped with delicate white vinyl drawer and door fronts. The vinyl may not be designed to withstand the heat produced by the normal safe operation of a self-cleaning range. Discoloration or delamination may occur. To avoid possible damage, we recommend increasing the 30" (76.2 cm) cabinet opening to 31 1/4" (79.4 cm) minimum and using a heat shield kit (CABKIT V), which may be ordered separately. The countertop cutout must remain 30" (76.2 cm).

IMPORTANT: Cutout Dimensions are Critical. Refer to installation instructions packaged with product BEFORE making cutouts.

Locating the range

Do not set range over holes in the floor or other locations where it may be subject to strong drafts. Any opening in the wall behind the range and in the floor under the range should be sealed. Make sure the flow of combustion or ventilation air is not obstructed.

Note: A range should NOT be installed over kitchen carpentry.

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

Range Cartridge and Accessory Usage												
Conventional Models						Downdraft Models						
		Free-Standing		Slide-in		Slide-In Electric		Slide-In Gas		Dual-Fuel	Pro-Style® Dual-Fuel	
Accessories	Model #	Electric ^A	Gas ^B	Electric ^A	Gas ^B	JES9750BA	JES9800BA	JES9860BA	JES9900BD	JGS9900BD	JDS9860BD	JDS9865BD
Wok ^C	A0142	*	*	*	*	*	*	*	*	*	*	*
Wok Ring	JGA8900ADX				*					*	*	*
Big Pot Element (2100W) ^D	A145A					*		*				
Griddle – Electric (for use with grill)	JEA8200ADX					*		*				
Griddle – Gas (for use with grill)	JGA8200ADX										*	*
Replacement Grill Assembly - Electric	JEA8010ADB					*		*				
Replacement Grill Module - Gas	JGA8010ADX										*	*
Grill Cover – Electric	A341/A341W					*		*				
Grill Cover – Gas	AG341 B/W										*	*
Excalibur® Replacement Grill Grates - Electric	JEA8000ADX					*		*				
Excalibur® Replacement Grill Grates - Gas	JGA8000ADX										*	*
Drying Rack ^E	DRINGRACK	*	*	*	*		*	*	*	*	*	*
Create-A-Space™ Half Rack	UXA4905ADX			*	*	*	*	*	*	*	*	*
Cartridges (end plug-in; use in open bay and/or in place of grill)												
Conventional Coil Element (large element 2100W, small element 1250W)	JEA7000AD B/W/S					*		*				
Radiant Element (large element 1800W, small element 1200W)	JEA8120AD B/W/S					*		*				
Gas Two-Burner Module (for slide-in range) (8,000 BTU each burner)	JGA8150AD B/W										*	
Pro-Style® Gas Two-Burner Module (for slide-in range) (8,000 BTU each burner)	JGA9150ADP											*
Backsplashes												
6" Custom Backsplash	UXA9107AA B/W/Q			*	*	*	*	*	*	*	*	
12" Backsplash (For stainless steel models)	UXA9107AAS			*	*	*	*	*	*	*	*	*
30" Pro-Style™ Backsplash with Light and Shelf	JXA9130AAP				JGS8860							*
Side Panel^F	UXA1100AA B/W/Q/P			*	*	*	*	*	*	*	*	*
Filler Kit^G	K71FILL B/W/Q/S			*	*	*	*	*	*	*	*	*

* Accepts optional cartridge/accessory.

A. Includes free-standing models JER8785Q, JER8885Q and slide-in models JES8750B, JES8850B

B. Includes free-standing models JGR8775Q, JGR8875Q, and slide-in models JGS8750B, JGS88850B, JGS8860B, JDS8850B.

C. The Jenn-Air® flat bottom wok may be used on any electric surface element or gas surface burner, excluding grill element and grill burner.

D. Raised element replaces large conventional coil element. Model A145A big pot element can be used only with an electric coil element cartridge.

E. Part # DRYINGRACK may be purchased as an accessory for Jenn-Air® free-standing and slide-in ranges with the drying feature, models JER8885, JGR8875, JES8850, JES9800, JES9860, JES9900, JGS8850, JGS8860, JGS9900, JDS8850, JDS9860 and JDS9865.

F. Side panel fits either left or right side of range.

G. For use with slide-in ranges when the cabinet cut depth exceeds 23 1/2".

Pro-Style™ Free-Standing Range Accessories

Accessories ^A	PRD3030NP	PRG3010NP/LP	PRD3630NP	PRG3610NP/LP	PRG4810NP/LP
Wok	A0142	A0142	A0142	A0142	A0142
Backsplash					
1.5" Stainless Steel	PRAD3001	PRAG3001	PRAD3601	PRAG3601	PRAG4801
12" Stainless Steel			PRAD3612	PRAG3612	PRAG4812
22" Stainless Steel with Shelf	PRAD3022	PRAG3022	PRAD3622	PRAG3622	PRAG4822
33 1/2" Stainless Steel with Wire Shelves	JXA9003CDP	JXA9003CDP	JXA9002CDP	JXA9002CDP	JXA9001CDP
Stainless Steel Hood (18" height)	JXT9030CDP	JXT9030CDP	JXT9036CDP	JXT9036CDP	JXT9048CDP
Stainless Steel Hood (10" height)	JXT9130CDP	JXT9130CDP	JXT9136CDP	JXT9136CDP	
Soffit Chimney ^B	JXA9030CDP	JXA9030CDP	JXA9036CDP	JXA9036CDP	JXA9048CDP

A. PRG model ranges require an optional PRAD/PRAG backsplash. Models PRAD3030NP, PRG3010NP and PRG3010LP are shipped with a 9" backsplash. The 1.5" backsplash is for use in island or non combustable wall installations. See page 148 for specifications of JXA and JXT accessories.

B. Use with hood when installation location has no soffit.



PLATINUM WARRANTY*

All Jenn-Air® appliances carry a minimum warranty of 1st year free parts and labor. Warranties begin on the date of purchase. The chart below details specific warranties by product category. The years after date of original purchase are listed across the top.

PRODUCT	YEARS								
		1	2	3	4	5	10	12	Lifetime
COOKTOP, WALL OVEN, CONVENIENCE OVEN, RANGE <i>(Gas or Electric)</i>	PARTS	All	Glass-Ceramic Cooktop Due to Thermal Breakage; Electric Heating Elements Including Surface Elements, Bake and Broil Elements; Electronic Controls; Gas Sealed Burners						
	LABOR	Yes							
WARMING DRAWER	PARTS	All							
	LABOR	Yes							
COOKING ACCESSORIES	PARTS	All	Glass-Ceramic Top Due to Thermal Breakage; Electric Surface Heating Elements; Gas Sealed Burners						
	LABOR	Yes							
COMBINATION MICROWAVE/WALL OVEN	PARTS	All	Electronic Control Panel Components; Electric Bake and Broil Elements; Microwave Energy Components						
	LABOR	Yes							
BUILT-IN MICROWAVE OVER-THE-RANGE MICROWAVE	PARTS	All	Limited to Magnetron Tube, Touch Pad Assembly, Microprocessor						
	LABOR	Yes							
HOOD	PARTS	All							
	LABOR	Yes							
DISHWASHER	PARTS	All	Microprocessor and Touch Pad Assemblies, Cabinet Front Panel Rust, Wash System Pump and Motor, Wash Arms and Sensor Package, DuraGuard® Rack Finish						
	LABOR	All	Door Liner (if liner fails due to water leak) Lifetime Full Warranty Dishwasher Replacement (if tub fails due to water leak) Lifetime Full Warranty						
BUILT-IN REFRIGERATOR	PARTS	All	Sealed Refrigeration System (consisting of the Compressor, Evaporator, Condenser, Drier and Connecting Tubing) which fails in normal home use.						
	LABOR	All	All	All	Mileage and transportation charges, if required, shall be the responsibility of the owner.				
REFRIGERATOR WINE CELLAR, UNDER COUNTER REFRIGERATOR, ICE MAKER	PARTS	30 Days for Water Filter Cartridge	Limited to Interior Cabinet Liner (exclusive of door liner) and Sealed Refrigeration System						
	LABOR	Yes	(Installation labor only) Limited to Interior Cabinet Liner (exclusive of door liner) and Sealed Refrigeration System						
COMPACTOR	PARTS	All							
	LABOR	Yes							
SMALL APPLIANCES MIXER BLENDER TOASTER	PARTS	Hassle-Free Replacement							
	LABOR								

*Warranty stated covers only those models specified in this catalog. See a Jenn-Air® dealer for model specific warranty information.

OWNER'S RESPONSIBILITIES

The customer has certain responsibilities which must be satisfied to qualify for coverage under these warranties. For all products, the owner is responsible for providing normal care and maintenance in accordance with the Use & Care Instructions, providing proof of purchase on request, proper installation and making the appliance reasonably accessible for service. For refrigerators, the owner will pay for service calls or trip charges to analyze sealed system defects, including related labor costs and mileage and/or transportation, if required, for the service second through fifth years.

WARRANTY SERVICE

Under the full warranty, service must be performed by an Authorized Jenn-Air Service Contractor. To obtain service, contact the dealer from whom the unit was purchased, an authorized Service Contractor, or contact Jenn-Air Customer Assistance, c/o Maytag Appliances Sales Company, P.O. Box 2370, Cleveland, TN 37320, 1-800-JENN-AIR (U.S. and Ontario) or 1-423-472-3333. Please include model number, serial number and date of original retail purchase in all correspondence. Service will be provided during normal business hours. All replacement parts assume the unused portion of this warranty. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CANADIAN RESIDENTS

This warranty covers only an appliance installed in Canada that has been certified to a National Standard of Canada unless the appliance is brought into Canada due to transfer of residence from the United States to Canada.



jennair.com