

DA 5428 W Puristic Arca

Wall ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.



- Distinctive design - 47 1/4 (1,198)Inch wide stainless steel ventilation hood
- Unique user convenience – Con@ctivity
- Pleasantly quiet – Miele Silence package
- Safe and easy to clean - Miele CleanCover

EAN: 4002516057390 / material number: 10934860

Construction type	
Wall ventilation hood	•
Design	
Color	Stainless steel
RAL color possible as special order	•
Customization possible on request	•
Operating modes	
Recirculated mode	air extraction
Control panel	
Electronic controls	•
Light-touch controls	•
Miele@mobile app	•
Power levels (number excl. Intensive)	3
Intensive setting	•
Programmable 'Intensive' switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Programmable grease filter saturation indicator	•
Acoustic package	•
Cleaning convenience	
Easy-to-clean CleanCover hood liner	•
Networking of domestic appliances	
Miele@home	•
WiFiConn@ct	•
MobileControl	•
Filter system	
Number of dishwasher-safe stainless steel grease filters	4
Lighting	
LED ClearView lighting	•
Light intensity in Lx	400
Color temperature in K	3,000
Blower	
Dual-action blower	•
AC motor	•
Air throughput with max. duct diameter in vented mode (not for external version)	
Air throughput	Values upon request
Safety	
Safety shut-off	•

DA 5428 W Puristic Arca


Wall ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.



Technical data	
Overall hood height for vented and external in in.(mm)	29 3/8 (745)
Overall hood height for recirculation in in.(mm)	34 1/2 (875)
Canopy width in in.(mm)	47 1/4 (1,198)
Height of hood canopy in in.(mm)	4 3/4 (120)
Depth of hood canopy in in.(mm)	20 1/2 (520)
Minimum distance above electric cooktops in in.(mm)	24 1/8 (610)
Minimum height above gas cooktop (max. 12.6 kW total power, burner 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	83 (37.5)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Installation notes	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Telescopic wall bracket	•
Standard accessories	
Non-return flap	•
Reducer from 150 to 125 mm Ø	•

DA 5428 W Puristic Arca

Wall ventilation hood
with energy-efficient LED lighting and backlit controls for easy use.

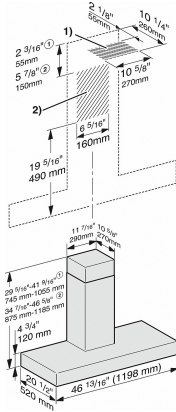

DA 5428 W(Installation drawing)

1) and 2) Shaded area for vent cut-out