



Color Variants

RF471705
Fully integrated, panel ready
Niche width 30" (76.2 cm)

Optional accessories

RA448220
Ice storage container, small.
RA450022

Installation Accessories

RA421713
Stainless steel door panel with handle
RA423140
RA425110
Long stainless steel door handle
RA428713
Stainless steel door panel, handleless
RA460012
RA460020
Connecting element for vertically split
appliance fronts (for a flush front)
RA464714
Ventilation grill, stainless steel

RF471705
Vario freezer 400 series
Fully integrated, panel ready
Niche width 30" (76.2 cm)



Stainless steel interior with solid anthracite aluminium elements
Warm white and glare-free LED light spots

Opening assist for door with two options:

1. Push-to-open function for integration into handleless furniture front
 2. Pull-to-open function to facilitate opening the door using a handle
- The drawers in the RC and RF models are positioned at the same height.
With side-by-side installation, the glass shelves and door racks can be aligned on the same level

Material and aesthetics of interior as for RC model
- Glass shelves
- Solid anthracite aluminium door racks
Flat stainless steel inner door, full-length
Almost invisible rail system for shelves and door racks for flexible positioning
Integrated automatic ice maker with fixed water connection
TFT touch display
Net volume 15.8 ft³ cu.ft. (447) litres
Energy Star certified

Operation

TFT touch display operation.
Clear text display in 44 languages.

Technical Features

Dynamic cold air distribution with Multi-Flow Air System.
Automatic defrosting with defrost water evaporation.
Cushioned door closing system.
Sabbath mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction warning system.
Home network integration for digital services (Home Connect) wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Freezer compartment

No-frost technology with fast freezing at -22 °F.
Temperature adjustable from 3 °F to -11 °F.
4-star freezer compartment.
Freezing capacity 11.7 kg/24 h.
4 safety glass shelves, white glass, 3 of which are individually height adjustable.
2 fully extendable drawers with transparent front.
Brilliant LED light spots with warm white, glare-free light.
Flat door rail system with fully flexible positioning of door racks.
4 height-adjustable door racks.

Ice dispenser

Integrated automatic ice maker in the freezer compartment, with fixed water connection.
Particle filter for water inlet, integrated in ventilation grille area.
Saturation indicator shown in TFT touch display.

Product Features

UPC code
825225961130
Variant color
Not applicable
Panel ready
Installation Type
N/A
Silence level (dBA)
42
Watts (W)
350
Current (A)
10
Volts (V)
110-120
Frequency (Hz)
60
Total annual energy consumption (kWh)
478.8
ENERGY STAR®
Yes
Approval certificates
CSA
Power Cord Length
118,1"
Plug type
120V-3 prong
Appliance dimensions (h x w x d) inch
83 3/4 " x 29 3/4" x 24"
Required cutout size (HxWxD) (in)
84" x 30" x 24 3/4"
Appliance Width (in)
29 3/4"
Height (in)
83 3/4 "
Depth (in)
24"
Product packaging dimensions (HxWxD) (in)
88.97 x 33.07 x 29.72
Total unit gross capacity (cu. ft.) - AHAM
15.8
Net weight (lbs)
362.000
Gross weight (lbs)
400.000

Consumption and connection features

2021-03-22
Page 1

Ice maker can be switched off independently.
Ice cube production approx. 2.9 lb (1.5 kg)/24 h.
Removable ice storage container with approx. 6.6 lbs. (2.5 kg) capacity.

Consumption data



Energy consumption 478.75 kWh/year.
Noise level 42 dB (re 1 pW).

Planning notes

Flat hinge.
Door hinge left, reversible.
Door opening angle of 115°, fixable at 90°.
For installation with a door opening angle of 90° the ice storage container must be exchanged for the small ice storage container (RA 448220). This must be done prior to fixing the door.
Max. door panel weight 130 lbs. (59 kg).
Shut-off valve for water connection must be planned next to the appliance and always be accessible.
If the water pressure exceeds 116 psi, connect pressure relief valve between water tap and hose set.

Rating

Total rating 1.079 kWh/24 h.
Total Amps: 10 A.
Connecting cable 118" (3.0 m), detachable.
Cold water connection required.
Electrical location 6" above ground in lower left corner of unit.
Supply hose 47,2 INCH (1.2 m) with 1/4" male compression fitting (standard icemaker connector).
Water pressure 29 to 116 psi.

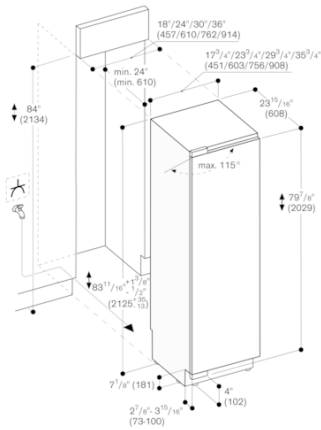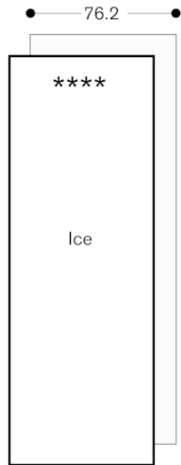

The maximum door front dimensions are based on a clearance of 28mm.