



Capacity: 2.5 cubic feet of refrigeration; 40 lbs daily ice production;

15 lbs ice storage

Defrost Type: Automatic Defrost Colors: Stainless Steel, Black, White

Features & Benefits



Feature	Benefit
High daily ice production and storage	Produces up to 40 lbs of ice per day and stores up to 15 lbs
Clear ice production capability plus refrigeration all in one unit	Both clear ice making capability and refrigeration all in one 24" wide footprint
Electronic control module	Automatically adjusts for changes in room and water temperatures to maximize ice production and provide consistently sized ice cubes
Touch Control Digital Technology	 Provides ability to set and see the temperature in the refrigerator Enables the user to: initiate the Automatic Self-Cleaning process adjust the size of the ice cube turn off the ice maker while maintaining the refrigerator's functions turn entire unit on/off
Easy, self-cleaning process	 Simple and easy to use. Within one hour, the internal ice making components are thoroughly cleaned and rinsed. Ensures high quality ice, plus helps to maintain proper operation
Optional 3/4" full overlay door panel	 Provides a fully integrated appearance with surrounding décor while maintaining zero clearance Easy to install. Black and white models only



	Must order kit number U-OL2175
Standard door will accept a 1/4" panel	Ability to match surrounding décor and cabinetsBlack and white models only
Flexible water drain options	Water may be drained using either a gravity feed drain or a U-Line supplied P60 drain pump. See back page for more information.
Built-in or freestanding	 Provides custom look No additional clearance around sides, top or rear of unit for ventilation. Do not obstruct front grille.
Stainless steel model	 Offers a full wrap stainless door and cabinet, along with a curved, sculpted stainless door handle and a stainless-like grille

Must be ordered right- or left-hand hinged

Integrates seamlessly with surrounding cabinets



Three fully encapsulated curved glass shelves	 Contains spills while providing an upscale appearance Easy to clean
Two contoured, adjustable in-door storage shelves	Provide easy access, flexible storage
Crisper drawer	Optimizes product storage
Self-closing door	 Engages when the door is open 8-10" Ensures a positive door seal and prevents door bounce-back
Field-reversible doors	Flexible installation optionsBlack and white models only
Integrated handle	Sleek designer look that does not add depth to the cabinetBlack and white models only
Vinyl-clad cabinets	 Textured, rich look. More resistant to scratching, peeling and flaking Cabinet extends to the floor Black and white models only
Recessed interior light	Located in the refrigerator. Automatically illuminates when the door is opened.
Leveling legs	More precise undercounter fit - durable - factory installed
Sabbath or "Black Out" mode	 Easily turns off all lights and control displays Automatically resets after 36 hours

8900 North 55th Street • Milwaukee, Wisconsin 53223 • Phone: 414-354-0300 • Fax: 414-354-7905


Contemporary grille design

Dimensions & Specifications



CLRCO2175

CLRCO2175 (Stainless Steel)

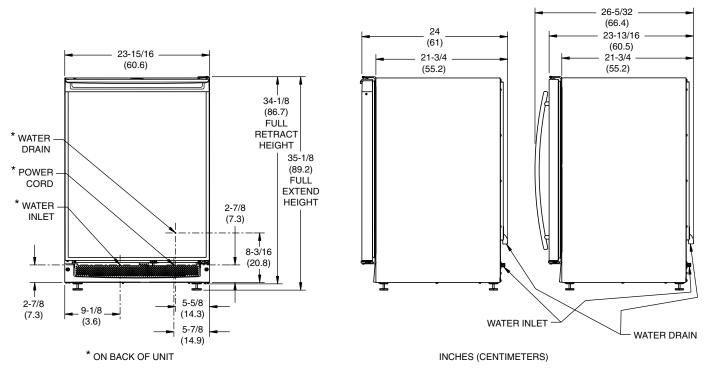

Clear Ice Maker/Refrigerator Model CLRCO2175

Specifications

Shipping Weight: Black and White Models	141 lbs (64 kg)
Stainless Steel Models	144 lbs (65 kg)
(1) Running Amps	4.0
(1) Maximum Start-up Amps	26.5

Capacities

Refrigerator volume	2.5 cubic feet
Freezer volume	N/A
Approximate daily ice production	Up to 40 lbs
Ice storage	Up to 15 lbs

(1) Amps pertain to a 110/115 volt, 60 Hz electrical environment.

Stainless steel models must be ordered right- or left-hand hinged.

Stainless steel models: Allow 2-1/2" clearance on hinge side for 90° door opening when installed against a wall.

Water drain options:

Depending on the model, the CLRCO2175 may either be installed using a gravity feed drain or may come equipped with a P60 drain pump. The P60 drain pump can also be installed in the field.

Gravity Drain: - A 7" height from the back of the unit

- Must have a 1/4" drop per foot of drain line

- NO upward slopes of the drain line should occur with a gravity drain model.

P60 Drain Pump: - Fully sealed and required if pumping water UPWARD or if draining water a long distance.

Please visit www.U-Line.com for Installation Guide. All specifications subject to change without notice.



8900 North 55th Street • Milwaukee, Wisconsin 53223 Phone: 414-354-0300 • Fax: 414-354-7905 • www.u-line.com