



15" SIGNATURE SERIES
Refrigerator



eco friendly
R600a Refrigerant



| | |
|-----------|--|
| JOB | |
| AREA | |
| ITEM NO. | |
| MODEL NO. | |



Glass Door Model



Solid Door Model

| MODELS | DESCRIPTION |
|----------------------|--|
| HP15RS-4-1R/L | Indoor Signature Series Refrigerator Solid Stainless Steel Door |
| HP15RS-4-2R/L | Indoor Signature Series Refrigerator Solid Panel Ready Door |
| HP15RS-4-3R/L | Indoor Signature Series Refrigerator Stainless Steel Glass Door |
| HP15RS-4-4R/L | Indoor Signature Series Refrigerator Panel Ready Glass Door |
| HP15RO-4-1R/L | Outdoor Signature Series Refrigerator Solid Stainless Steel Door |
| HP15RO-4-2R/L | Outdoor Signature Series Refrigerator Solid Panel Ready Door |
| HP15RO-4-3R/L | Outdoor Signature Series Refrigerator Stainless Steel Glass Door |
| HP15RO-4-4R/L | Outdoor Signature Series Refrigerator Panel Ready Glass Door |

KEY PRODUCT FEATURES AND BENEFITS

- 1000 BTU/hr capacity delivers industry's most energy efficient cool down, indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- Variable speed compressor minimizes sound; up to 30% quieter than competitors
- Commercial-grade all stainless steel interior and exterior provide superior durability and easy cleaning
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (outdoor models only)

Quick Features:

- Full extension shelving provides faster and safer product access with no reaching in the back of the cabinet; shelves fully extend on vibration dampened stainless steel ball bearing glides
- Industry's best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready door to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero ozone depletion potential
- Storage for up to 66 cans



15" SIGNATURE SERIES
Refrigerator

| MODEL NUMBERS | | HP15RS | HP15RO |
|----------------------------------|-----------------------------|--|--|
| MODEL DESCRIPTION | | 15" Indoor Refrigerator | 15" Outdoor Refrigerator |
| ATTRIBUTES | | | |
| Perlick Anti-Condensation System | | NO | YES |
| OVERALL DIMENSIONS | Width - in. (mm) | 14-7/8" (378 mm.) | 14-7/8" (378 mm.) |
| | Depth - in. (mm) | 24" (610 mm.) | 24" (610 mm.) |
| | Height - in. (mm) | 34-1/4" (870 mm.) | 34-1/4" (870 mm.) |
| OPENING DIMENSIONS | Width - in. (mm) | 15" (381 mm.) | 15" (381 mm.) |
| | Depth - in. (mm) | 24-7/8" (632 mm.) | 24-7/8" (632 mm.) |
| | Height - in. (mm) | 34-1/2" (876 mm.) | 34-1/2" (876 mm.) |
| INTERNAL VOLUME Net. Cu. Ft. | | 2.8 cu. ft. | 2.8 cu. ft. |
| SHIPPING WEIGHT Lbs. (kg.) | | 150 lbs (68.04 kg) | 150 lbs (68.04 kg) |
| ELECTRICAL SPECIFICATIONS | Electrical Supply | 115 VAC/60 Hz/1 Ph | 115 VAC/60 Hz/1 Ph |
| | Running Load Amps | 2.1 amps | 2.1 amps |
| | Electrical Connection | Cord connected | Cord connected |
| | Cord Plug Type | NEMA 3 Prong 5-15P | NEMA 3 Prong 5-15P |
| | Cord Length | 6' | 6' |
| | Defrost Initiation | Automatic | Automatic |
| | Defrost Type | Off cycle | Off cycle |
| | Thermostat | Digital | Digital |
| REFRIGERATION SPECIFICATIONS | Lighting Type | LED | LED |
| | Refrigerant | R600a (38g) | R600a (38g) |
| | Expansion Device | Capillary Tube | Capillary Tube |
| | Temperature Settings F°(C°) | 33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°) | 33° (0.5°) - 48° (8.8°) Factory Set Point 36° (2.2°) |
| | Heat Rejection (at 75°F) | 300 BTU/hr | 300 BTU/hr |
| | Pull Down Capacity | 1000 BTU/hr | 1000 BTU/hr |
| | Front Vented | Yes | Yes |
| PLUMBING | | None Required | None Required |

Installation Notes: To achieve 24" install depth, place electrical connection adjacent to the installation cavity.

ACCESSORIES

| MODEL NOS. | DESCRIPTION |
|------------|------------------------------|
| (L) | Factory Installed Lock |
| 67990-L/R | Stacking Kit for HP15 models |
| 66736-15 | Caster Kit for HP15 models |


Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com.



15" SIGNATURE SERIES
Refrigerator

| CUSTOMER MODEL NUMBER | REGULATORY MODEL NUMBER | Hinge Side | Lock |
|-----------------------|-------------------------|------------|------|
| HP15RS-4-1L | HP15RS4C-00-SLF0R | Left | No |
| HP15RS-4-1R | HP15RS4C-00-SRF0R | Right | No |
| HP15RS-4-2L | HP15RS4C-00-PL00R | Left | No |
| HP15RS-4-2R | HP15RS4C-00-PR00R | Right | No |
| HP15RS-4-3L | HP15RS4C-00-TLF0R | Left | No |
| HP15RS-4-3R | HP15RS4C-00-TRF0R | Right | No |
| HP15RS-4-4L | HP15RS4C-00-RL00R | Left | No |
| HP15RS-4-4R | HP15RS4C-00-RR00R | Right | No |
| HP15RS-4-1LL | HP15RS4C-00-SLFLR | Left | Yes |
| HP15RS-4-1RL | HP15RS4C-00-SRFLR | Right | Yes |
| HP15RS-4-2LL | HP15RS4C-00-PL0LR | Left | Yes |
| HP15RS-4-2RL | HP15RS4C-00-PR0LR | Right | Yes |
| HP15RS-4-3LL | HP15RS4C-00-TLFLR | Left | Yes |
| HP15RS-4-3RL | HP15RS4C-00-TRFLR | Right | Yes |
| HP15RS-4-4LL | HP15RS4C-00-RL0LR | Left | Yes |
| HP15RS-4-4RL | HP15RS4C-00-RR0LR | Right | Yes |
| HP15RO-4-1L | HP15RO4C-00-SLF0R | Left | No |
| HP15RO-4-1R | HP15RO4C-00-SRF0R | Right | No |
| HP15RO-4-2L | HP15RO4C-00-PL00R | Left | No |
| HP15RO-4-2R | HP15RO4C-00-PR00R | Right | No |
| HP15RO-4-3L | HP15RO4C-00-TLF0R | Left | No |
| HP15RO-4-3R | HP15RO4C-00-TRF0R | Right | No |
| HP15RO-4-4L | HP15RO4C-00-RL00R | Left | No |
| HP15RO-4-4R | HP15RO4C-00-RR00R | Right | No |
| HP15RO-4-1LL | HP15RO4C-00-SLFLR | Left | Yes |
| HP15RO-4-1RL | HP15RO4C-00-SRFLR | Right | Yes |
| HP15RO-4-2LL | HP15RO4C-00-PL0LR | Left | Yes |
| HP15RO-4-2RL | HP15RO4C-00-PR0LR | Right | Yes |
| HP15RO-4-3LL | HP15RO4C-00-TLFLR | Left | Yes |
| HP15RO-4-3RL | HP15RO4C-00-TRFLR | Right | Yes |
| HP15RO-4-4LL | HP15RO4C-00-RL0LR | Left | Yes |
| HP15RO-4-4RL | HP15RO4C-00-RR0LR | Right | Yes |

Perlick® 15" SIGNATURE SERIES Refrigerator

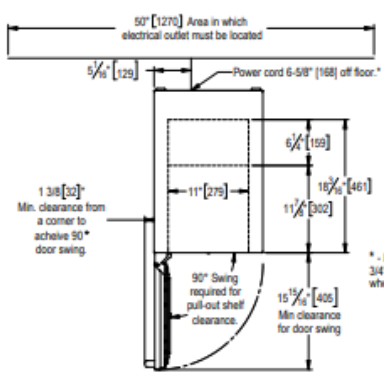

* - Leg leveler can add 3/4" [19] to these dimensions when fully extended.

Door Models

