

FFGH3051VS

FRONT CONTROL RANGE

30" GAS



AVAILABLE COLORS



Stainless

PRODUCT DIMENSIONS

| | |
|----------------------|----------|
| Height (Max.) | 36-5/8" |
| Width | 29-7/8" |
| Depth (Incl. Handle) | 29-3/16" |

MORE EASY-TO-USE FEATURES

Frigidaire Fit Promise

We promise that your new 30" Frigidaire® front control range will fit your existing range cutout, or we will reimburse up to \$100 for professionally modifying the countertop.

Continuous Corner to Corner Grates

Continuous Grates make it easy to move heavy pots and pans across burners without lifting.

Store-More™ Storage Drawer

With the Store-More™ Storage Drawer, you will have extra space to store your cookware.

Rear Filler Kit Included

Our Rear Filler Kit will help fill any gap between the back of the range and your backsplash.

Low Simmer Burner

Perfect for cooking delicate foods and sauces.

SIGNATURE FEATURES

Get the look of a built-in range, without the remodel

This Front Control Range easily fits the space of your existing 30" range.

Convenient 30-Minute Steam Cleaning

A 30-minute light oven cleaning that's chemical-free, odor-free, and fast.

Quick Boil Burner

Get meals on the table faster with our powerful 17,000 BTU burner.

Even Baking Technology

Our even baking technology ensures even baking every time.



CERTIFICATIONS

ADA Compliant

When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

| BURNERS | BTU |
|-------------|--------|
| Right Front | 17,000 |
| Right Rear | 5,000 |
| Left Front | 12,000 |
| Left Rear | 9,500 |

FFGH3051VS FRONT CONTROL RANGE

30" GAS

FRIGIDAIRE

FEATURES

| | |
|-------------------------------|-----------------------------------|
| Oven Control / Timing System | Ready-Select® Controls |
| Surface Type | Black Porcelain |
| Sealed Gas Burners | Yes |
| Grates | Cast Iron with Black Matte Finish |
| Window | Extra-Large |
| Exterior Door Finish | Stainless |
| Handle Design | Stainless |
| Exterior Finish (Side Panels) | Black |
| Oven Cleaning System | Steam Clean |
| Drawer Functionality | Storage |
| Trim Rear Filler | Black |

OVEN CONTROLS

| | |
|--------------------|----------|
| Bake | Yes |
| Broil | Yes |
| Delay Start | Yes |
| Delay Bake | Yes |
| Steam Clean | Yes |
| Delay Clean | Yes |
| Kitchen Timer | Yes |
| Timed Cook Option | Yes |
| Auto Oven Shut-Off | 12 Hours |
| Oven Lock-Out | Yes |

COOKTOP FEATURES

| | |
|--------------------------|--------|
| Right Front Burner (BTU) | 17,000 |
| Right Rear Burner (BTU) | 5,000 |
| Left Front Burner (BTU) | 12,000 |
| Left Rear Burner (BTU) | 9,500 |

OVEN FEATURES

| | |
|----------------------------------|------------------------|
| Capacity (Cu. Ft.) | 5.0 |
| Oven Light | 1 Incandescent 40W |
| Rack Configuration | 2 Standard |
| Baking System | Even Baking Technology |
| Broiling System | Vari-Broil™ (Hi / Lo) |
| Bake Burner / Broil Burner (BTU) | 18,000 / 13,500 |

CERTIFICATIONS

| | |
|-------------------------------|-----|
| A.D.A. Compliant ¹ | Yes |
|-------------------------------|-----|

OPTIONAL ACCESSORIES

| | |
|------------------------|----------|
| LP Gas Conversion | PN GRLP4 |
| Rear Filler Trim Black | Included |

SPECIFICATIONS

| | |
|--------------------------------|-----------------------------|
| Oven Interior (H x W x D) | 18-5/8" x 24-3/8" x 19-1/8" |
| Power Cord Connection Location | Middle Bottom Rear |
| Gas Supply Connection Location | Right Bottom Rear |
| Voltage Rating | 120V / 60 Hz / 5A |
| Amps @ 120 Volts | 5.0 |
| Shipping Weight (Approx.) | 180 Lbs. |


¹ When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

PRODUCT DIMENSIONS

| | |
|--------------------------|----------|
| A - Height (Max.) | 36-5/8" |
| B - Width | 29-7/8" |
| C - Depth (Incl. Handle) | 29-3/16" |
| Depth with Door Open 90° | 47" |

CUTOUT DIMENSIONS

| | |
|--------------------|-----|
| Height (Standard.) | 36" |
| Width | 30" |
| Depth | 25" |

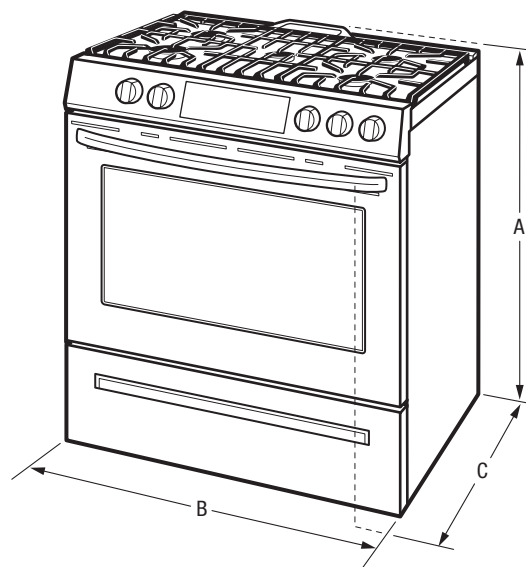

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca.
Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

FRIGIDAIRE


USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FFGH3051VS 02/19
© 2019 Electrolux Home Products, Inc.

FFGH3051VS FRONT CONTROL RANGE

30" GAS

FRIGIDAIRE

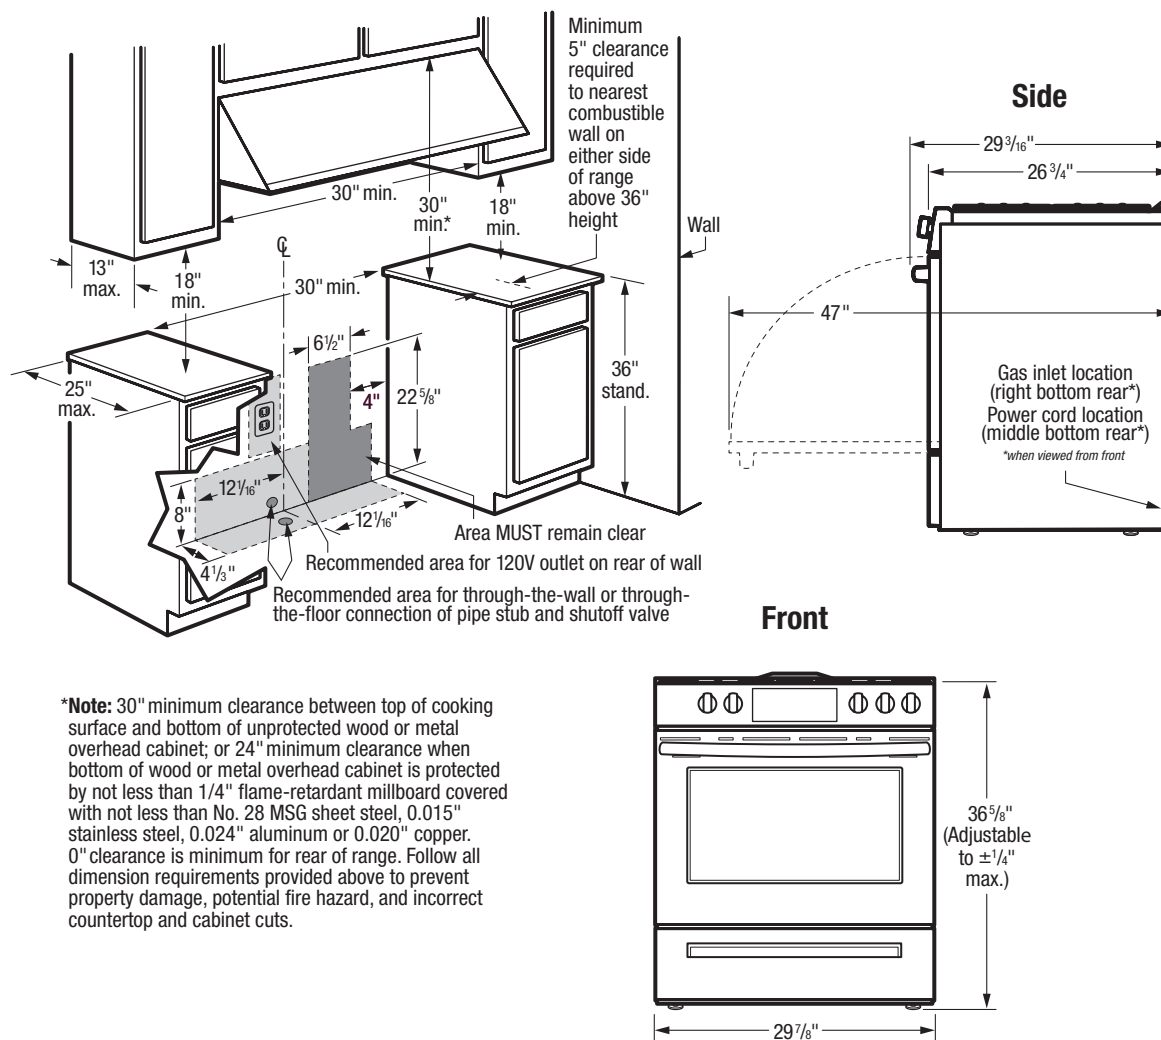

***Note:** 30" minimum clearance between top of cooking surface and bottom of unprotected wood or metal overhead cabinet; or 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/4" flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper. 0" clearance is minimum for rear of range. Follow all dimension requirements provided above to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) – 180 Lbs.
- Voltage Rating – 120V / 60 Hz / 5 Amps
- Amps @ 120 Volts = 5.0 Amps
- Always consult local and national electric and gas codes.
- Make sure wall coverings around range can withstand heat generated by range.
- Linoleum or any other synthetic floor covering located beneath range, must be capable of withstanding minimum heat of 90° F above room temperature without shrinking, warping or discoloring. Insulating pad or 1/4"-thick plywood required between range and a carpeted floor.
- Do not obstruct flow of combustion air at oven vent nor around base or beneath lower front panel of range. Range requires fresh air for proper burner combustion.
- Do not install range beneath any downward-blowing, overhead vent hood or air curtain.
- Range ships with 3/4" factory regulator.
- Range is LP Gas convertible. (Optional LP Gas Conversion Kit available.)
- Floor beneath range MUST be solid and level.
- Overhead cabinetry should not exceed a 13" maximum depth.

- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with 0" minimum rear clearance.
- Minimum clearance required (from edge of rangetop to nearest combustible wall on either side of range above 36" height) is based on largest burner output rating on cooking surface.
- Allow 30" minimum clearance between top of cooking surface and bottom of unprotected wood or metal overhead cabinet; or 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/4" flame-retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

OPTIONAL ACCESSORIES

- LP Gas Conversion Kit – (PN # GRLP4).



FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca.
Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

FFGH3051VS 02/19

© 2019 Electrolux Home Products, Inc.