PP9036DJ

GE Profile[™] 36" Built-In Touch-Control Cooktop


DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

IMPORTANT: Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

NOTE: 36" Ribbon cooktops are approved for use over select GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/ electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered. Before installing, consult installation instructions packed with product for current dimensional data.

overhead cabinets (when no hood or microwave is installed) APPROXIMATE COOKING DIMENSIONS 3-1/4" at front of unit and v 5-9/16" at conduit location 33-3/4 19-1/8" to 30" MIN. from countertop to 15" MIN. height from countertop unprotected cabinet (when to nearest cabinet (including no hood or microwave is light rails) on both sides of installed) 1-3/4" MIN. cookton See label next to nameplate for MIN. clearance to wall 2-1/2" MIN. Required Electrical junction box 16" MIN 2" MIN. clearance To insure accuracy, it is best to make a to side wall from cut-out template when cutting the opening in the counter on both sides of cooktop

INSTALLATION ABOVE A WALL OVEN



VOLTAGE (60HZ AC)	240V	208V
CONNECTED LOAD (MAX.)	9.6kW	7.2kW
CURRENT DRAW (MAX.)	40.0 Amps	34.7 Amps
RECOMMENDED CIRCUIT BREAKER	40 Amps	40 Amps

*NOTE: Check local codes for required breaker size.

13" MAX. depth of unprotected









For answers to your Monogram, GE Café[™] Series, GE Profile[™] Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center[®] Service, 800.626.2000.

PP9036DJ

$GE\ Profile^{^{\mathrm{m}}}\ 36''\ Built-In\ Touch-Control\ Cooktop$

FEATURES AND BENEFIT

Five radiant cooking elements

Glide touch controls

Power Boil tri-ring element

Power Boil dual-ring element

SyncBurners

Multi-element timer


Control lock capability

 $Custom\ settings$

Keep warm setting

Fit Guarantee

Model PP9036DJBB - Black on black

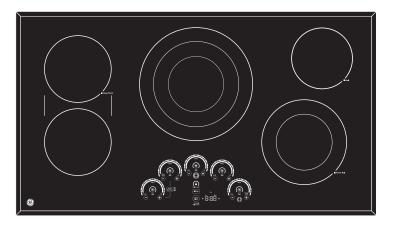

*OPTIONAL STAINLESS STEEL CLAD ALUMINUM GRIDDLE

Achieve even results with this lightweight griddle, tailored to fit GE SyncBurners. Order part number JXGRIDL1 from your GE Dealer.

GUARANTEED FIT

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications

Visit geappliances.com for more info

