




Savona's semi-circular surfaces accentuate this range hood's European design with delicate reflections of light and shadows. Available in stainless steel, powder-coated black and white and now with Zephyr's

trend-setting sleek new alternative to stainless steel, Black Stainless Steel. Savona features a robust 685-CFM blower, ICON Touch® controls with 5 speeds and our exclusive ACT™ technology.


ACT™

| Min. - Max. CFM   | INTERNAL BLOWER STANDARD | INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™* |           |
|-------------------|--------------------------|--|-----------|
|                   |                          | 200 - 685  | 200 - 390 |
| Min. - Max. Sones | 1 - 6                    | 1 - 4  | 1 - 3     |


\*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

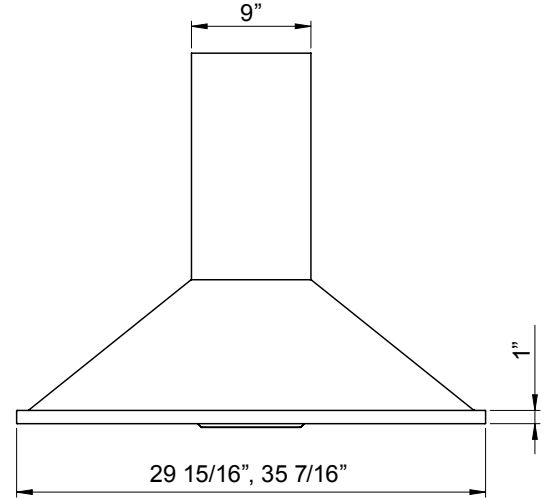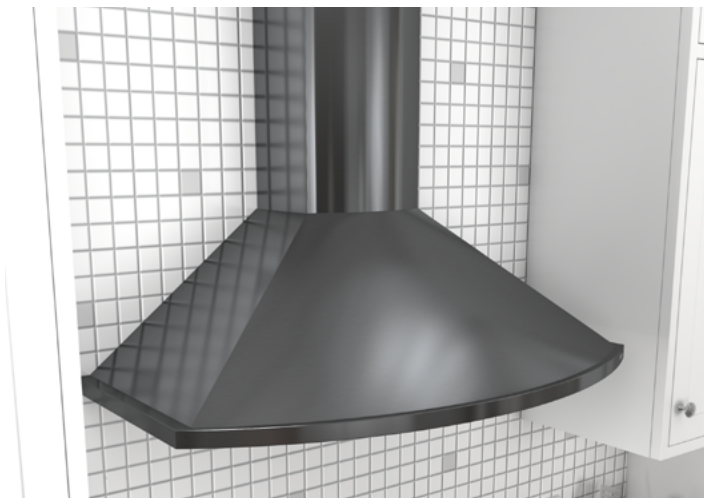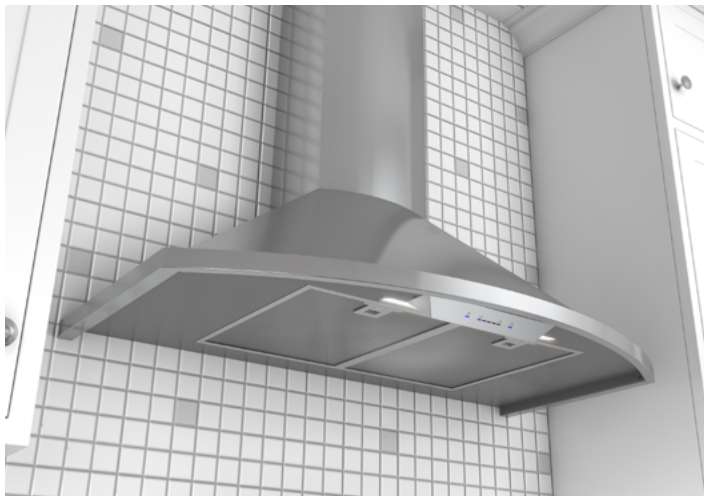

FRONT

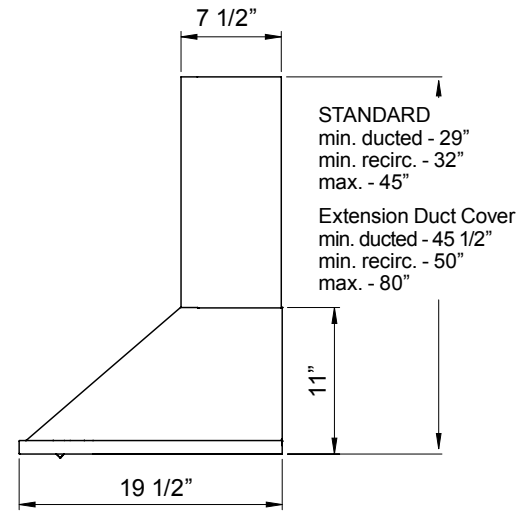

SIDE

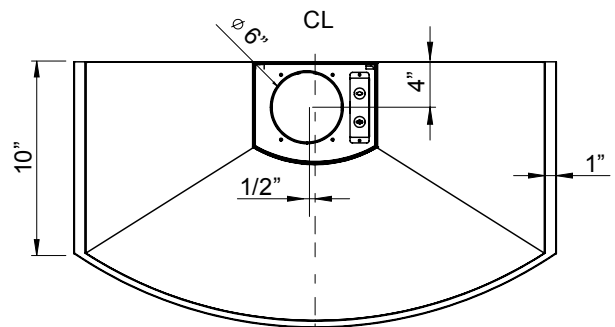

TOP

## MODEL

|                       |            |            |
|-----------------------|------------|------------|
| Black                 | ZSA-E30DB  | ZSA-M90DB  |
| Black Stainless Steel | ZSA-E30DBS | ZSA-M90DBS |
| Stainless Steel       | ZSA-E30DS  | ZSA-M90DS  |
| White                 | ZSA-E30DW  | ZSA-M90DW  |
| Size                  | 30"        | 36"        |

## BLOWER PERFORMANCE

|                           |           |           |
|---------------------------|-----------|-----------|
| Blower CFM (Min. - Max.)  | 200 - 685 | 200 - 685 |
| Sones (Min. - Max.)       | 1 - 6     | 1 - 6     |
| ACT 390 CFM (Min. - Max.) | 200 - 390 | 200 - 390 |
| ACT 290 CFM (Min. - Max.) | 200 - 290 | 200 - 290 |

## FEATURES

|                             |                        |                        |
|-----------------------------|------------------------|------------------------|
| ACT™ Technology             | 390, 290               | 390, 290               |
| Controls                    | ICON Touch®            | ICON Touch®            |
| Speed Levels                | 5*                     | 5*                     |
| Auto Delay-Off              | Yes                    | Yes                    |
| Lighting                    | BriteStrip™ LED, x1    | BriteStrip™ LED, x1    |
| Dual-Level Lighting         | Yes                    | Yes                    |
| Filters                     | Aluminum Mesh x2       | Aluminum Mesh x2       |
| Recirculating Option        | Yes                    | Yes                    |
| Extension Duct Cover Option | Yes, Up to 12' Ceiling | Yes, Up to 12' Ceiling |

## DUCT SPECIFICATIONS

|                            |                       |                       |
|----------------------------|-----------------------|-----------------------|
| Vertical Internal Blower   | 6" Round              | 6" Round              |
| Horizontal Internal Blower | NA                    | NA                    |
| AC POWER                   | 120V, 60Hz at Max. 4A | 120V, 60Hz at Max. 4A |

## OPTIONAL ACCESSORIES

|                                       |                       |                       |
|---------------------------------------|-----------------------|-----------------------|
| Recirculating Kit                     | ZRC-00SV              | ZRC-00SV              |
| Extension Duct Cover                  | Z1C-01SAB (Black)     | Z1C-01SAB (Black)     |
|                                       | Z1C-01SABS (Black SS) | Z1C-01SABS (Black SS) |
|                                       | Z1C-01SA (SS)         | Z1C-01SA (SS)         |
|                                       | Z1C-01SAW (White)     | Z1C-01SAW (White)     |
| Stainless Steel Telescopic Backsplash | AK1710                | NA                    |
| Make-Up Air Kit                       | MUA008A               | MUA008A               |
| Baffle Filter Kit (2 filters)         | ZOF-B001              | ZOF-B001              |

|                         |           |           |
|-------------------------|-----------|-----------|
| MOUNTING HEIGHT RANGE** | 26" - 34" | 26" - 34" |
|-------------------------|-----------|-----------|

## WARRANTY

3 years parts, 1 year labor      3 years parts, 1 year labor

| CEILING HEIGHT          |                          | 8'        | 8.5'      | 9'          | 9.5'        | 10'       | 10.5'     | 11'       | 12'       |
|-------------------------|--------------------------|-----------|-----------|-------------|-------------|-----------|-----------|-----------|-----------|
| STANDARD<br>DUCT COVER  | Ducted Mounting Height** | 26" - 32" | 26" - 34" | 27" - 34"   | 33" - 34"   | NA        | NA        | NA        | NA        |
|                         | Recirc Mounting Height** | 26" - 28" | 26" - 34" | 27" - 34"   | 33" - 34"   | NA        | NA        | NA        | NA        |
| EXTENSION<br>DUCT COVER | Ducted Mounting Height** | NA        | NA        | 26" - 26.5" | 26" - 32.5" | 26" - 34" | 26" - 34" | 26" - 34" | 28" - 34" |
|                         | Recirc Mounting Height** | NA        | NA        | NA          | 26" - 28"   | 26" - 34" | 26" - 34" | 26" - 34" | 28" - 34" |

\*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.

\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

**ACT™** Airflow Control Technology™ (ACT™)  
is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.  
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

SEP21.0101

