

Café™ 2.1 Cu. Ft. Over-the-Range Microwave Oven

CVM521P2MS1

CAFÉ

DISTINCT BY DESIGN™



FEATURES & BENEFITS

Create a streamlined cooking experience - Simplify your cooking steps by using Chef Connect to automatically activate vents and surface lights when a range element is turned on, as well as sync your microwave and range clocks

A simple and smart addition to your culinary repertoire - Fresh vegetables and rice are perfectly prepared with a steam cook button that simplifies the entire process

Say goodbye to guesswork - Enjoy consistently delicious results with sensor cooking controls that automatically adjust the time and power

Brighten up the room - Illuminate the entire cooking surface with crisp, clear LED cooktop lighting that can also save on energy costs

Sparkling clean with just a wipe - Focus on the food and forget the mess knowing that the easy-clean interior with steam clean lets you swiftly wipe away spills and splatters

Like a breath of fresh air - Keep your kitchen ready for guests with a three-speed, 400-CFM venting system that removes smoke, grease, odors and moisture

A subtle reminder for filter replacement - Keep your kitchen smelling fresh and clean with an upfront charcoal filter with indicator light that lets you know when the filter needs to be replaced

Cook your way with just one touch of a button - Enjoy the convenience of one-touch cooking with My Cycle, a custom cycle that remembers the exact time and temperature settings of your favorite foods

More room for more food - Entertaining unexpected guests is easy with the 2.1 cu. ft. capacity that helps prepare a large amount of food quickly

Create a look that matches your personal style - Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

APPEARANCE

| | |
|--------------------|----------------------------|
| Case Color | Gray |
| Color Appearance | Stainless Steel |
| Door Color | Stainless Steel |
| Smooth Steel Door | Yes, with Hidden Hinge |
| Handle | Stainless Steel Appearance |
| Oven Door Features | Oven Window |

FEATURES

| | |
|---------------------------------------|---|
| Cooking Technology | Microwave |
| Electronic Digital Display with Clock | Yes (LED) |
| Microwave Watts (IEC-705) | 1000W |
| Power Levels | 10 |
| Turntable | Glass |
| Turntable Size | 14.2 in |
| Microwave Sensor Cooking Controls | Popcorn; Reheat; Cook (5 Foods); Beverage; Steam Cook; Defrost; Weight/Time |
| Control Features | Start/Pause; Clear/Off; Power; Add 30 Seconds; Cook Time; Steam Clean; Chef Connect; Timer On/Off; Turntable On/Off; Mute On/Off; Settings; Vent Fan; Surface Light; My Cycle |
| Microwave Oven Interior | Easy Clean Coated |
| Control Type | Dial; Electronic Touch |
| Cooking Modes | Microwave |
| Style | Over-The-Range |
| Cooktop Lighting | LED; High/Low/Off |
| Exhaust Fan | 4-Speed; 400-CFM |
| Interior Oven Light | Halogen |
| Multi-Language Capability | English/Spanish |
| Turntable On / Off | Yes |

CAPACITY

| | |
|-----------------------------|-----------|
| Total Capacity (cubic feet) | 2.1 cu ft |
| Vent CFM | 400 |

ECONOMICAL/QUIET

| | |
|--------------|-------------------|
| Venting Type | Externally Vented |
|--------------|-------------------|

TECHNICAL DETAILS

| | |
|-------------------------------|--------|
| Electrical Input - 120V Watts | 1700 |
| Input Volts/Hertz | 120/60 |

ACCESSORIES

| | |
|-----------------------------------|-----------------------|
| Optional Side Filler Panel Kit | JX36DSS |
| Recirculating Charcoal Filter Kit | WB06X10807 (included) |

WEIGHTS & DIMENSIONS

| | |
|-----------------------------|--|
| Approximate Shipping Weight | 65.6 lb |
| Cavity (W x H x D) | 21-15/16 x 11-5/8 x 14-9/16 in |
| Net Weight | 56.6 lb |
| Overall Depth | 15-9/16 in, 17-15/16 in (including handle) |
| Overall Height | 16-5/16 in |
| Overall Width | 29-14/16 in |
| Cabinet Width | 30 in |

WARRANTY

| | |
|----------------|---|
| Parts Warranty | Limited 1-year entire appliance Limited 5-Year Magnetron |
| Labor Warranty | Limited 1-year entire appliance |
| Warranty Notes | See written warranty for full details |

Café™ 2.1 Cu. Ft. Over-the-Range Microwave Oven

CAFÉ

DISTINCT BY DESIGN™

CVM521P2MS1

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

Note: Requires 120V grounded outlet. Electrical receptacle must be located in cabinet above microwave oven. No additional wiring, venting or cabinet rebuilding necessary in many cases. Complete detailed, easy-to-follow installation instructions and convenient full-size templates are packed with the microwave oven.

Important Information: When installing the microwave oven over a range, allow minimum of 2" from bottom of microwave oven to top of range backguard to allow for removal of light covers.

Ventilation Options: The microwave ovens are designed for adaptation to the following three types of ventilation:

- Outside exhaust (vertical – as shown)
- Outside exhaust (horizontal)
- Recirculating (non-vented ductless – see Filter Kit drawing)

Installation Information: This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.


Hood Exhaust Duct: Outside ventilation requires a HOOD EXHAUST DUCT. Read the following carefully.

Exhaust Connection: The hood exhaust has been designed to mate with a standard 3-1/4" x 10" rectangular duct. If a round duct is required, a rectangular-to-round transition adaptor must be used. Do not use less than a 6" diameter duct.

Rear Exhaust: If a rear or horizontal exhaust is to be used, care should be taken to align exhaust with space between studs, or wall should be prepared at the time it is constructed by leaving enough space between the wall studs to accommodate exhaust.

Maximum Duct Length: For satisfactory air movement, the total duct length of 3-1/4" x 10" rectangular or 6" diameter round duct should not exceed 140 equivalent feet.

Elbows, Transitions, Wall and Roof Caps, etc., present additional resistance to airflow and are equivalent to a section of straight duct which is longer than their actual physical size. When calculating the total duct length, add the equivalent length of all transitions and adaptors plus the lengths of all straight duct sections. The chart below shows the approximate feet of equivalent length of some typical ducts.

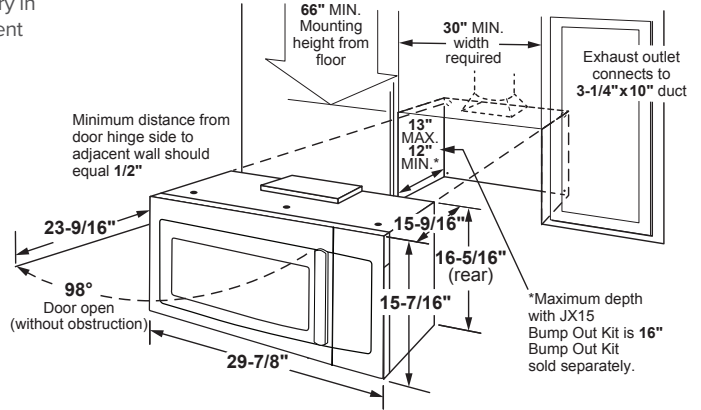


| DUCT | EQUIVALENT FEET |
|--|-----------------|
| A. Rectangular-To-round Transition Adaptor | 5 ft. |
| B. Wall Cap | 40 ft. |
| C. 90° Elbow | 10 ft. |
| D. 45° Elbow | 5 ft. |
| E. 90° Elbow | 25 ft. |
| F. 45° Elbow | 5 ft. |
| G. Roof Cap | 24 ft. |

OPTIONAL ACCESSORIES (AVAILABLE AT ADDITIONAL COST)

Filler Panel Kits JX36DSS

When replacing a 36" range hood, this kit fills in the additional width to provide a custom built-in appearance. For installation between cabinets only; not for end-of-cabinet installation. Each kit contains two 3"-wide filler panels.

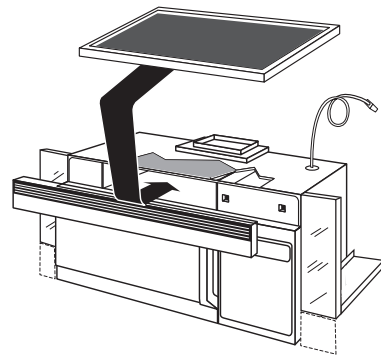

ADDITIONAL ACCESSORIES



CXOTRHKPMBZ
Brushed Bronze
1 handle



CXOTRHKMSS
Brushed Stainless
1 handle



CXOTRHKPMBT
Brushed Black
1 handle



CXOTRHKPMCU
Brushed Copper
1 handle