

Performance PC 165



6 1/2" Performance Coaxial Kit




- Polyglass cone
- Aluminum basket
- Adjustable inverted dome tweeter

SPECIFICATIONS

Nominal power	80W	
Maximum power	160W	
Sensitivity	92.5dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	2.65 Ohms	
VC diameter	25mm	
VC height	11mm	
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	0.15mH	
Xmax	3.25mm	0 ^{1/8} in
Magnet d x h	85 x 17mm	3 ^{1/3} x 0 ^{2/3} in
Magnet weight	215g	0.47 lb
Flux density	-	
Gap height	5mm	0 ^{1/16} in
Net weight	1000g	2.20 lb

FREQUENCY RESPONSE / IMPEDANCE

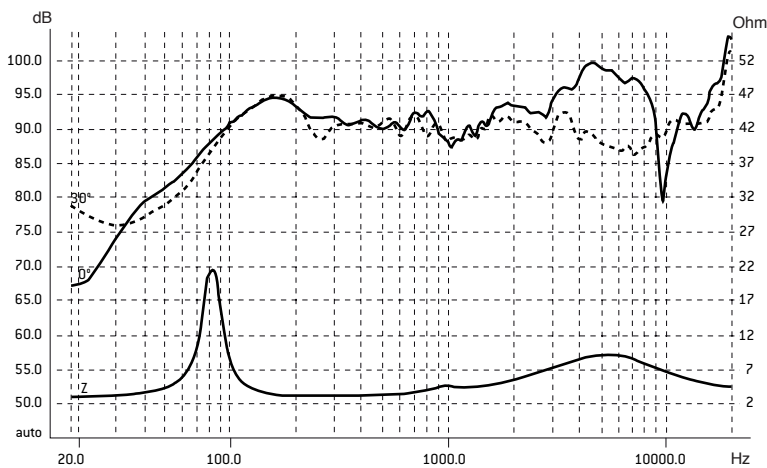

PARAMETERS

Fs	68.14Hz
Vas	9.96 l
Qts	0.73
Qes	0.81
Qms	7.22
Re	2.65 Ohms
Sd	132.73cm ²
Cas	7.09E-8m ² /N
Mas	76.91kg/m ⁴
Ras	4560.69 Ohms.ac
Cms	402 μm/N
Mms	13.55g
Rms	0.803kg/s
Ces	713.93mF
Les	7.64mH
Res	23.62 Ohms
Bl	4.36 N/A
SPL	87.70 dB/W/m

MECHANICAL DRAWING

Unit: mm

