

RISE™ 24" Fully Integrated Built-In Dishwasher, 38 dBA

JDAF5924RL



Features

Quietest Luxury Dishwasher Brand

Based on normal cycle

38 dBA Tranquility System

At 38 dBA, JennAir is the quietest luxury dishwasher brand*, all without sacrificing performance.

High-Capacity 3rd Rack with Wash

The high-capacity 3rd level rack glides with quiet and ease, even when fully loaded with tapas bowls and large rocks glasses.

Fully Flush & Integrated Design

Effortlessly integrate with seamless design. This flush to cabinet dishwasher blends into your cabinets for a clean, finished look.

Door Open Dry

At the end of the cycle, the door opens to allow hot air out and bring fresh air into the dishwasher.

Time on Floor

Status of the cycle is displayed on the floor below the dishwasher for a quick helpful visual to keep you moving.



Accessories

| | |
|--|-------------|
| Tall Tub Dishwasher Drain Hose Extension | 3385556 |
| Moisture Barrier Kit | 4396277 |
| Water Line Installation Kit | W10278635RP |
| Power Cord Kit, Right Angle | W11365014 |
| Water Inlet Fitting | W10685193 |
| Chopsticks Basket | W11643641 |
| Under-Counter Bracket | W10426979 |

Product Details


| | |
|-------------------|---|
| Dimensions | 23 9/16" W x 32 1/4" H x 22 5/8" D |
| Cutout Dimensions | Min: 23 5/8" W x 32 1/4" H x 24" D Max: 24 1/4" W x 35 7/18" H x 24" D |
| Sound Level (dBA) | 38 dBA, Quietest in luxury |
| # of Racks | 3, 3rd Rack with Wash |
| # of Wash Cycles | 6 |
| Dry System | Open Door System |
| Energy Rating | 240 kWh |

RISE™ 24" Fully Integrated Built-In Dishwasher, 38 dBA

JDAF5924RL



Cutout Dimensions

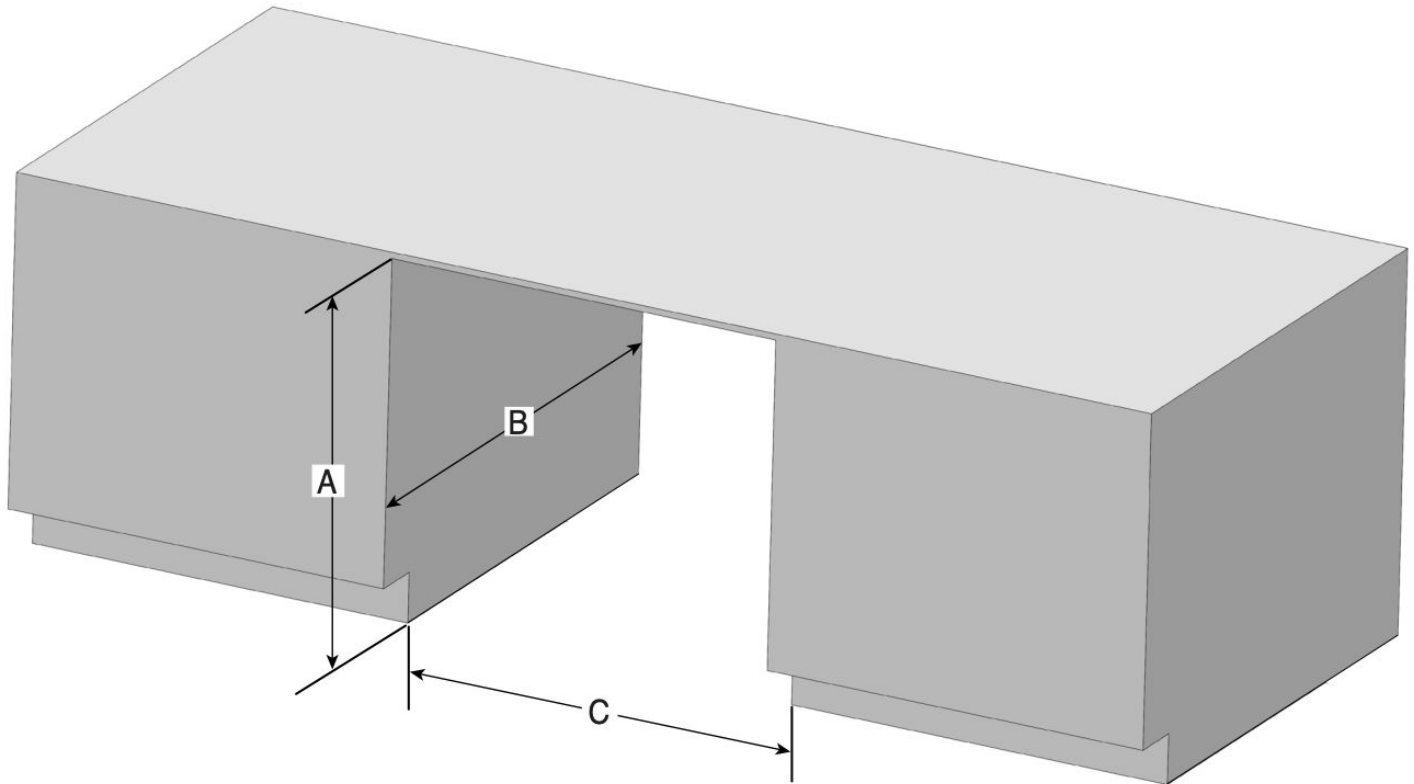

- A. $32\frac{1}{4}''$ - $35\frac{7}{16}''$ (820-900 mm) measured from the lowest point on the underside of the countertop.
- B. 24" (609.6 mm) Minimum
- C. $23\frac{5}{8}''$ - $24\frac{1}{4}''$ (600-616 mm) Minimum, measured from narrowest point of opening.

Water Supply Req

- This dishwasher may be fitted with a smart inlet hose with a water cut off valve. Do not cut the water inlet hose for any reason, to install, adapt or shorten.
- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher.
- $\frac{3}{8}''$ (95 mm) O.D. copper tubing with compression fitting or flexible braided water supply line.

Electrical

You Must Have:

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply.
- Copper wire only.
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- Install the dishwasher on a circuit with appropriate interrupter per your local code. The dishwasher is compatible with time delay fuses, standard circuit breakers, and GFCI and AFCI circuit breakers.

Resources [Owners' Manual & Install Instructions](#) [Dimension Guide](#) [Warranty](#)