

Panel Ready 24" Fully Integrated Built-In Dishwasher, 38 dBA

JDAF5924RX



Features

Quietest Luxury Dishwasher Brand

Based on normal cycle

38 dBA Tranquility System

At 38 dBA, JennAir is the quietest luxury dishwasher brand*, all without sacrificing performance.

High-Capacity 3rd Rack with Wash

The high-capacity 3rd level rack glides with quiet and ease, even when fully loaded with tapas bowls and large rocks glasses.

Fully Flush & Integrated Design


Effortlessly integrate with seamless design. This flush to cabinet dishwasher blends into your cabinets for a clean, finished look.

Door Open Dry

At the end of the cycle, the door opens to allow hot air out and bring fresh air into the dishwasher.

Time on Floor

Status of the cycle is displayed on the floor below the dishwasher for a quick helpful visual to keep you moving.

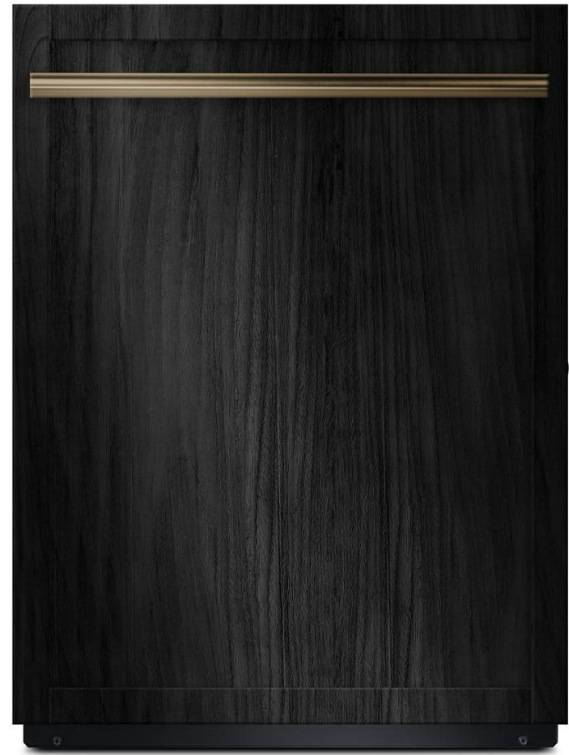

Accessories

Tall Tub Dishwasher Drain Hose Extension	3385556
Moisture Barrier Kit	4396277
Water Line Installation Kit	W10278635RP
Power Cord Kit, Right Angle	W11365014
Water Inlet Fitting	W10685193
Chopsticks Basket	W11643641
Under-Counter Bracket	W10426979

Product Details


Dimensions	23 9/16" W x 32 1/4" H x 21 7/8" D
Cutout Dimensions	Min: 23 5/8" W x 32 1/4" H x 24" D Max: 24 1/4" W x 35 7/18" H x 24" D
Sound Level (dBA)	38 dBA, Quietest in luxury
# of Racks	3, 3rd Rack with Wash
# of Wash Cycles	6
Dry System	Open Door System
Energy Rating	240 kWh

Panel Ready 24" Fully Integrated Built-In Dishwasher, 38 dBA

JDAF5924RX



Cutout and Custom Panel Dimensions

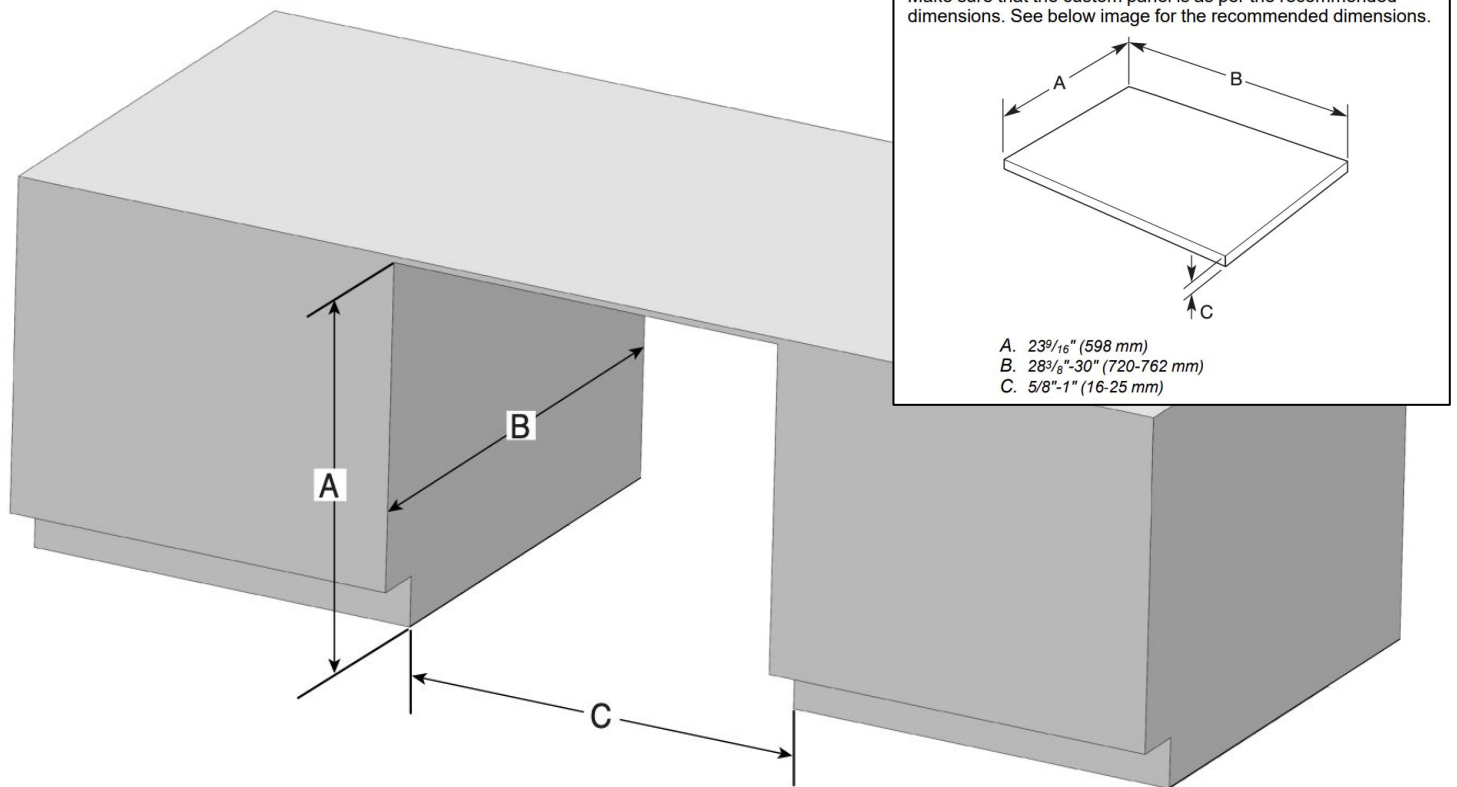

- A. $32\frac{1}{4}$ "- $35\frac{7}{16}$ " (820-900 mm) measured from the lowest point on the underside of the countertop.
- B. 24" (609.6 mm) Minimum
- C. $23\frac{5}{8}$ "- $24\frac{1}{4}$ " (600-616 mm) Minimum, measured from narrowest point of opening.

Water Supply Req

- This dishwasher maybe fitted with a smart inlet hose with a water cut off valve. Do not cut the water inlet hose for any reason, to install, adapt or shorten.
- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher.
- $3/8$ " (95 mm) O.D. copper tubing with compression fitting or flexible braided water supply line.

Electrical

You Must Have:

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply.
- Copper wire only.
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- Install the dishwasher on a circuit with appropriate interrupte per your local code. The dishwasher is compatible with tim delay fuses, standard circuit breakers, and GFCI and AFCI circuit breakers.