

VIDEOMIC GO II™

ON-CAMERA SHOTGUN MICROPHONE

The VideoMic GO II is a compact, lightweight on-camera shotgun microphone that makes capturing incredible audio incredibly easy. It features both an analog 3.5mm TRS output and a digital USB-C output for use with a camera, smartphone, or computer*, making it super versatile. Annular line tube technology delivers crisp, clear sound for all content creation applications, and the included windshield and innovative HELIX™ isolation mount ensure your recordings are crystal-clear.

- Ultra-lightweight shotgun microphone (just 60g)
- 3.5mm TRS output for use with cameras
- Digital USB-C output for use with phones, tablets and computers*
- HELIX isolation mount
- No batteries required
- Compatible with the RØDE software suite for advanced features, including RØDE Connect and RØDE Capture



HELIX™
ISOLATION
MOUNT



HIGHLY
DIRECTIONAL



DIGITAL
USB OUTPUT



3.5mm TRS
CONNECTION



iPhone
& Android
COMPATIBLE

ACOUSTIC & ELECTRICAL SPECIFICATIONS

| | |
|--------------------------------|---|
| Acoustic Principle: | Pressure gradient electret condenser |
| Polar Pattern: | Supercardioid |
| Frequency Response: | 20Hz - 20kHz |
| Output Impedance: | 2K2Ω |
| Signal to Noise Ratio: | 79 dBA |
| Equivalent Noise (A-weighted): | 15 dBA |
| Dynamic Range: | 95 dBA Typical |
| Sensitivity: | -31dBV(28.78mV @ 94dB SPL) ± 1dB @ 1kHz |
| Max Input SPL: | 110 dB SPL |
| Output Connections: | 3.5mm TRS USB-C |
| Computer Connectivity: | USB-C (USB 2.0) |
| Simultaneous I/O: | Stereo input and output when in USB mode |
| Power Requirements: | 3.5mm plug-in power 2 - 5V USB 5V |
| Bit Depth: | 24-bit |
| Sample Rates: | 48 kHz |
| Minimum OS Requirement: | macOS 10.15 Windows 10 (20H2) iOS 14 Android 9.0 |

rode.com



HELIX™
ISOMOUNT



* Additional cables required - SC15 (Lightning),
SC16 (USB-C) or SC18 (USB-A)

RØDE

MECHANICAL SPECIFICATIONS

| | |
|------------------------------|--|
| Weight (grams): | VideoMic GO II: 33 VideoMic GO II and included accessories: 60 |
| Dimensions (millimetres): | VideoMic GO II: Length: 120 Diameter: 21.6 VideoMic GO II and included accessories: Length: 120 Width: 50.3 Height: 52.4 |
| Compatible RØDE Accessories: | WS12, SC14, SC15, SC16, SC17, SC18, SC19, SC20, SC21, SC22, SC23, SC24, SC25, SC26 |
| Compatible RØDE Software: | RØDE Connect RØDE Central RØDE Reporter RØDE Capture |
| Included Accessories: | 1 x SC14 TRS-TRS Cable 1 x Foam Windshield 1 x HELIX Isolation Mount |

WHAT'S IN THE BOX



VideoMic GO II



HELIX Isolation Mount





Windshield




SC14

DIMENSIONS

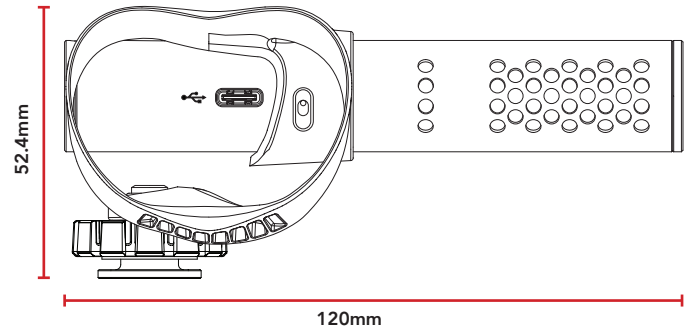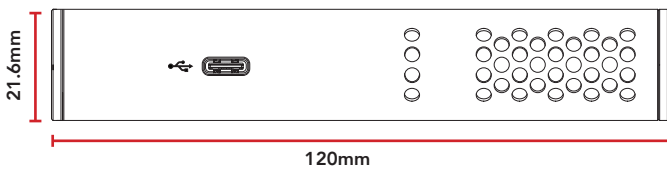

POLAR PATTERN

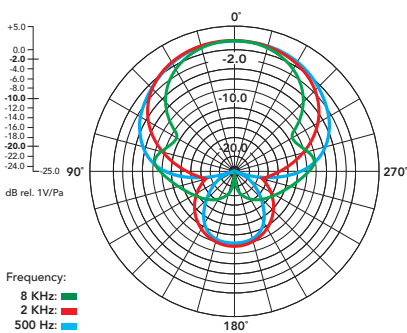

FREQUENCY RESPONSE

