

# Pocket-Handle 24" Built-In Dishwasher, 39 dBA

# JDPSG244PS



## Features

### Quietest Luxury Dishwasher Brand

Based on normal cycle

### Precise Fit 3rd Rack for Cutlery

This slim profile, top-tier rack organizes extra utensils and overflow silverware without sacrificing storage space below.

### Rapid Wash Cycle

This wash cycle cleans dishes in about an hour and is ideal for any get-together, diversion or intimate night in.

### Daring Obsidian Middle and Bottom Racks

These racks are coated in nylon and feature cushion-tip tines, which cradle and protect dishware during loading and washing and help prevent movement during the washing and drying cycles.

### 39 dBA Tranquility System

At 39 dBA, these JennAir dishwashers run quietly without sacrificing performance. The variable speed wash pump motor is finely tuned to deliver a quiet experience in the kitchen.

### 14 Place Setting Capacity

Enough capacity for a service of 14 means there's always room for one more.



## Accessories


Tall Tub Dishwasher Drain Hose Extension	3385556
Moisture Barrier Kit	4396277
Water Line Installation Kit	W10278635RP
Power Cord Kit, Right Angle	W11365014
Water Inlet Fitting	W10685193
affresh® Dishwasher Cleaner - 6 Count	W10549851
Under-Counter Bracket	W10426979

## Product Details

Dimensions	23 <sup>7</sup> / <sub>8</sub> " W x 33 <sup>1</sup> / <sub>2</sub> " H x 24 <sup>1</sup> / <sub>2</sub> " D
Cutout Dimensions	Min: 24" W x 33 <sup>5</sup> / <sub>8</sub> " H x 24" D Max: 24" W x 34 <sup>1</sup> / <sub>2</sub> " H x 24" D
Sound Level (dBA)	39 dBA
# of Racks	3
# of Wash Cycles	6
Dry System	Fan Dry with Heating Element
Energy Rating	270 kWh

## Cutout Dimensions

Check that all surfaces have no protrusions that would prohibit dishwasher installation.

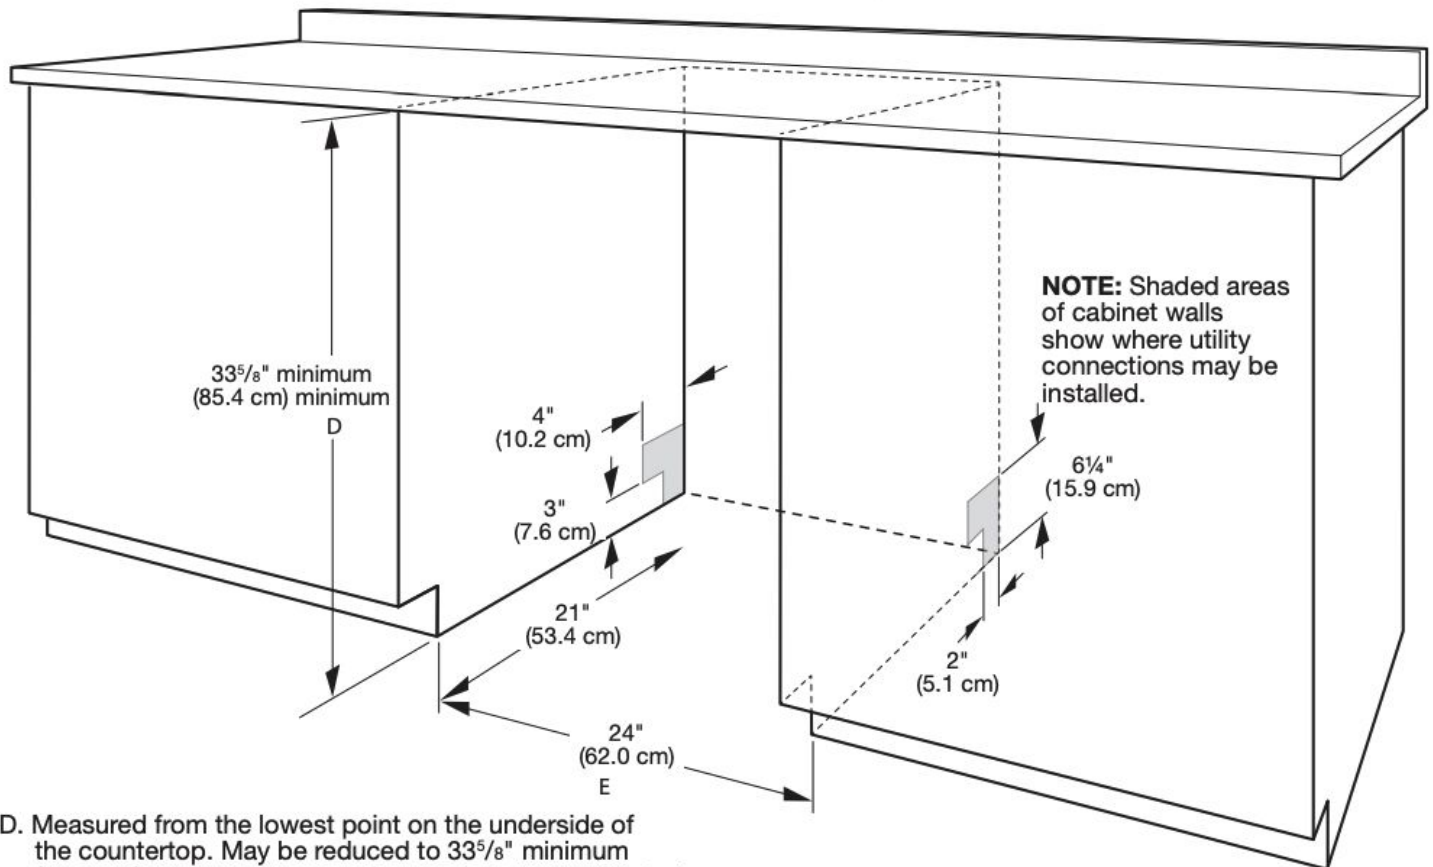

D. Measured from the lowest point on the underside of the countertop. May be reduced to  $33\frac{5}{8}$ " minimum (85.4 cm) minimum by removing the feet and perforated area of insulation (blanket) on dishwasher.

E. Minimum, measured from narrowest point of opening.

## Plumbing

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher.
- 3/8" (0.95 cm) O.D. copper tubing with compression fitting or flexible braided water supply line.
- **NOTE:** 1/2" (1.3 cm) minimum plastic tubing is not recommended.
- A 90° elbow with 3/4" (0.95 cm) hose connection with rubber washer.

## Electrical

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

**We Recommend:**

- A time-delay fuse or circuit breaker.