

# Panel-Ready 24" Built-In Dishwasher, 38 dBA

# JDPSS245LX



## Features

### Quietest Luxury Dishwasher Brand

Based on normal cycle

### High-Capacity 3rd Rack with Wash

The largest 3rd Level Rack in the luxury industry glides with quiet and ease, even when fully loaded with tapas bowls, large rocks glasses and cocktail shakers.

### Enhanced Cinematic Lighting

18 LED lights ramp up to full intensity, chasing away shadows.

### 38 dBA Tranquility System

At 38 dBA, JennAir is the quietest luxury dishwasher brand\*, all without sacrificing performance.

### Superior Glide Upper Rack

The upper rack glides smoothly and quietly, even when fully loaded. Each rail features 52 ball bearings for quiet operation.

### 15 Place Setting Capacity

Enough capacity for a service of 15 means there's always room for one more.



## Accessories


Tall Tub Dishwasher Drain Hose Extension	3385556
Moisture Barrier Kit	4396277
Water Line Installation Kit	W10278635RP
Power Cord Kit, Right Angle	W11365014
Water Inlet Fitting	W10685193
affresh® Dishwasher Cleaner - 6 Count	W10549851
Under-Counter Bracket	W10426979

## Product Details

Dimensions	23 <sup>7</sup> / <sub>8</sub> " W x 33 <sup>1</sup> / <sub>2</sub> " H x 24 <sup>3</sup> / <sub>4</sub> " D
Cutout Dimensions	Min: 24" W x 33 <sup>5</sup> / <sub>8</sub> " H x 24" D Max: 24" W x 34 <sup>1</sup> / <sub>2</sub> " H x 24" D
Sound Level (dBA)	38 dBA, Quietest in luxury
# of Racks	3, 3rd Rack with Wash
# of Wash Cycles	6
Dry System	Fan Dry with Heating Element
Energy Rating	270 kWh

## Cutout Dimensions

Check that all surfaces have no protrusions that would prohibit dishwasher installation.

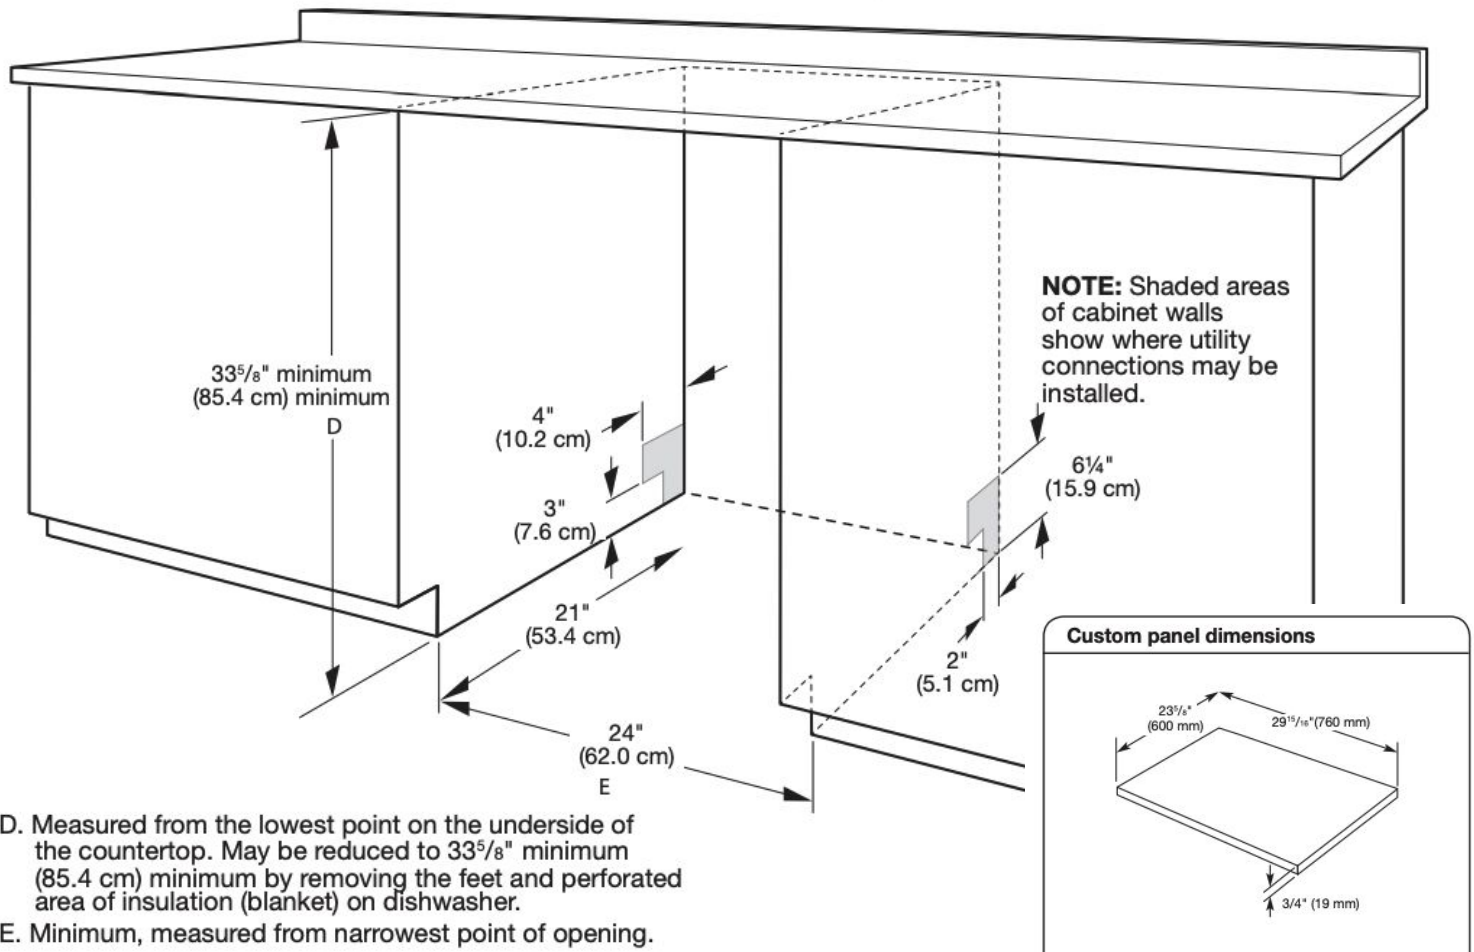

## Plumbing

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher.
- 3/8" (0.95 cm) O.D. copper tubing with compression fitting or flexible braided water supply line.
- **NOTE:** 1/2" (1.3 cm) minimum plastic tubing is not recommended.
- A 90° elbow with 3/4" (0.95 cm) hose connection with rubber washer.

## Electrical

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

**We Recommend:**

- A time-delay fuse or circuit breaker.