


# Quartz Chronographs G10/G15

---

## User's Manual

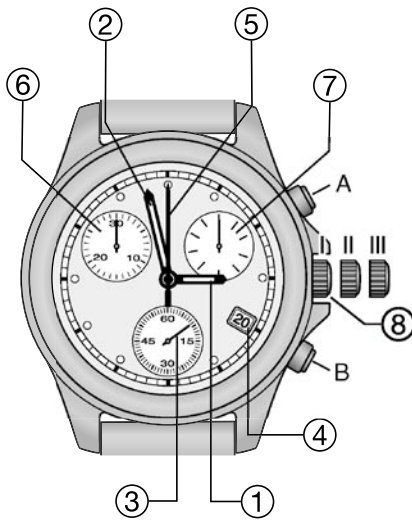


### Standard model

- ① Hour hand
- ② Minute hand
- ③ Seconds hand
- ④ Date indicator

**Chronograph:**

- ⑤ 60 seconds counter
- ⑥ 30 minutes counter
- ⑦ 1/10 second counter

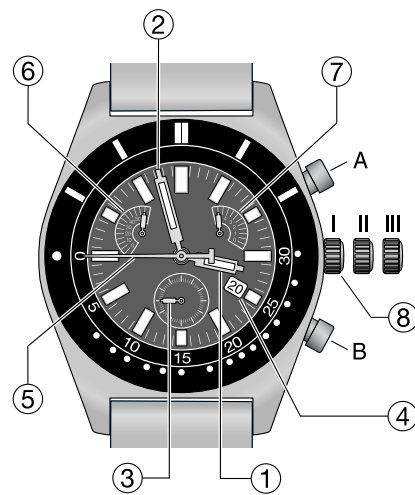

### Retrograde model


- ① Hour hand
- ② Minute hand
- ③ Small seconds hand
- ④ Date indicator

**Retrograde chronograph:**

- ⑤ 30 seconde retrograde counter hand
- ⑥ 60 minute counter
- ⑦ 5 minute retrograde counter

**Crown with 3 positions (8):**

- I Winding position (not pulled out)
- II Setting position for date (unscrewed\*, half pulled out)
- III Setting position for time (unscrewed\*, completely pulled out)

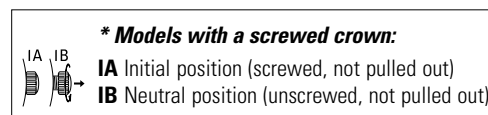

## Congratulations

We congratulate you on choosing a chronograph from TISSOT®, one of the most highly renowned Swiss brands in the world. Meticulously designed, using only the highest quality materials and components, your chronograph is protected against shock loads, variations in temperature, water and dust.

This User's Manual is valid for standard TISSOT® quartz chronographs for ladies (G15 movement) and men (G10 movement), and for chronographs with retrograde function. For the settings and operation of your chronograph, please refer to the instructions corresponding to your model.

Your chronograph allows you to time events lasting up to 30 or 60\* minutes, and offers you the following functions:

- Standard START–STOP function
- ADD function (partial times)
- SPLIT function (intermediate times)

To enable your chronograph to give you many years of perfect precision service, we recommend that you follow the advice contained in this booklet very carefully.

\* Retrograde model

## Standard model

### Usage / Settings

#### Models with a screwed crown

To ensure even better water-resistance, some models are fitted with a screwed down crown. Before setting the time or date, you must first unscrew the crown into position **IB** before you can pull it out into position **II** or **III**.

**Important: After every operation, the crown must be screwed back down firmly to protect the seal integrity of the watch.**

#### Setting the time


Pull the crown out to position **III** and turn it clockwise or counterclockwise to set the desired time. Synchronize the small seconds hand at the 6 o'clock position with an official time signal (radio/TV/Internet) by pulling out the crown to the second notch; the hand will then stop. Once the time has been synchronized, push the crown back into position **I** (and screw it back on models with a screwed crown).

#### Winding

Quartz chronographs never need to be wind.

#### Fast correction of the date

Pull the crown out to its first stop (position **II**) and turn it counterclockwise until the correct date is displayed.



## Resetting the counters

The counters must be zeroed before starting timing. If necessary, proceed as follows:

- Zero the 30 minutes (or 12 hours) counter hand:
  - Gents G10: crown in position **III**, pusher **A**
  - Ladies G15: crown in position **II**, pusher **B**
- Zero the 60 seconds counter hand:
  - Gents G10: crown in position **II**, pusher **B**
  - Ladies G15: crown in position **III**, pusher **A**
- Zero the 1/10th of a second counter hand:
  - Gents G10: crown in position **II**, pusher **A**
  - Dames G15: crown in position **III**, pusher **B**



## Simple timing

The simple «chronograph function» enables you to measure isolated events.

- 1 START
- 2 STOP  
**Readout of time (see example)**  
- 5 minutes,  
- 57 seconds,  
- 7/10ths of a second
- 3 Reset to zero

**NB:** Before each timing operation, the chronograph hands must be at their start points. If necessary, refer to the paragraph entitled **SETTING THE COUNTERS TO ZERO**.

**Comment:** All the timing functions are available while the crown is pressed into position I.



## ADD function

The ADD function enables you to measure consecutive events without having to reset to zero in between. Each time is added to the previous total.

- 1 START
- 2 STOP **Readout**
- 3 RESTART
- 4 STOP **Readout**
- 5 RESTART
- 6 STOP **Readout**
- X Reset counters to zero



## SPLIT-TIME function

The SPLIT-TIME function enables you to stop the hands to read an intermediate time, without interrupting the timing operation. When you restart, the hands «catch up» to the ongoing elapsed time.

- 1 START
- 2 SPLIT 1  
**Readout of time 1 (see fig. 2)**  
- 5 minutes,  
- 4 seconds,  
- 6/10ths of a second
- 3 RESTART (catchup)
- 4 SPLIT 2  
**Readout of time 2**  
- 15 minutes,  
- 36 seconds,  
- 8/10ths of a second
- 5 RESTART (catchup)
- 6 STOP  
**Readout of the last time (cumulative time)**  
- 25 minutes,  
- 18 seconds,  
- 4/10ths of a second
- 7 Reset counters to zero



## Retrograde model

### Usage / Settings

#### Models with a screwed crown

To ensure even better water-resistance, some models are fitted with a screwed down crown. Before setting the time or date, you must first unscrew the crown to position **IB**, before pulling it out to position **II** or **III**.

**Important: After every operation, the crown must be screwed back down firmly to protect the seal integrity of the watch.**

#### Setting the time


Pull the crown out to position **III** and turn it clockwise or anticlockwise to set the desired time. Synchronize the small seconds hand at the 6 o'clock position with an official time signal (radio/TV/Internet) by pulling out the crown to the second notch; the hand will then stop. Once the time has been synchronised, push the crown back down into position **I** (and tighten it back down on models with a screwed down crown).

#### Winding

Quartz chronographs never need to be wind.

#### Fast correction of the date

Pull the crown out to position **II** and turn it anticlockwise until the correct date is displayed.



### Resetting the counters

The counters must be zeroed before starting timing. If necessary, proceed as follows:

- 1 Zero the 60 minute counter hand:  
- Crown in position **II**, pusher **B**
- 2 Zero the 30 second retrograde counter hand:  
- Crown in position **III**, pusher **A**
- 3 Zero the 5 minute retrograde counter hand:  
- Crown in position **III**, pusher **B**



### Simple timing

The «simple timing» function is no different to that on a standard chronograph, but the retrograde counter hand turns anti-clockwise, from 9 o/c to 3 o/c.

- 1 START
- 2 STOP (**Time readout**)
- 3 Reset counters to zero

**NB:** Before each timing operation, the chronograph hands must be at their start points. If necessary, see paragraph **RESETTING THE COUNTERS**.

**Comment:** All the timing functions are available while the crown is pressed into position **I**.



## ADD function

The ADD function enables you to measure consecutive events without having to reset to zero in between. Each time is added to the previous total.

- 1 START
- 2 STOP **Time 1 readout**
- 3 RESTART
- 4 STOP **Cumulative readout of times 1 and 2**
- 5 RESTART
- 6 STOP **Cumulative readout of times 1, 2 and 3**
- X Reset counters to zero



## SPLIT-TIME function

The SPLIT-TIME function enables you to stop the hands to read an intermediate time, without interrupting the timing operation. When you restart, the hands «catch up» to the ongoing elapsed time.

- 1 START
- 2 SPLIT 1  
**Elapsed time readout**  
- 1 minute,  
- 4 seconds
- 3 RESTART (catchup)
- 4 SPLIT 2  
**Elapsed time readout (since START 1)**  
- 3 minutes,  
- 18 seconds
- 5 RESTART (catchup)
- 6 STOP  
**Total time readout (since START 1)**  
- 5 minutes,  
- 28 seconds
- 7 Reset counters to zero



## Care and maintenance

We would advise you to clean your chronograph regularly (except for the leather strap) using a soft cloth and warm soapy water. After brief immersion in a saline solution (salty water), rinse it in fresh water and leave it to dry completely.

Do not leave it anywhere where it might be subjected to major variations in temperature or humidity, in the sunlight or near strong magnetic fields.

We recommend that you have your watch checked every 3 to 4 years by your approved TISSOT® reseller or agent. To benefit from the highest standards of service and aftercare, and to ensure your guarantee remains in force, please always contact an approved TISSOT® dealer or agent.

**TISSOT® quartz chronographs** benefit from the incomparable precision of quartz. Their power reserve usually enables them to operate for more than 2 years in continuous use. If you ever envisage a period when you might not perhaps be wearing your chronograph for a few weeks or months, we would advise you to put it to one side, having first pulled the crown into position III. This action interrupts the electrical power supply to the motor, thereby substantially increasing the service life of the battery.

### Replacing the battery

Once it has run out, the battery should be replaced without delay by an official TISSOT® dealer or agent. 1.55 V Battery, No. 394, SR 936 SW.

### Collection and treatment of end of life quartz watches\*



This symbol indicates that this product should not be disposed with household waste. It has to be returned to a local authorized collection system. By following this procedure you will contribute to the protection of the environment and human health. The recycling of the materials will help to conserve natural resources.

\* valid in the EU member states and in any countries with corresponding legislation.