



15" W. UNDERCOUNTER CLEAR ICE MACHINE

Viking 5 Series – Builder Select Model – VBFIC

PROFESSIONAL FEATURES

- BrightShield™ antimicrobial lighting creates a more hygienic environment for ice
- Produces 3/4" clear ice cubes
- Produces up to 39 lbs. of clear ice daily
- Stores up to 28 lbs. of ice
- Ice scoop included with dedicated holder
- Factory-installed drain pump included
- Digital controls feature audible alerts and programmed cleaning reminders
- Audible alerts, cleaning reminders and Sabbath Mode
- Arctic white LED light
- Elegant midnight black interior

MODEL NUMBER

- VBFIC1152D – 15" Undercounter Clear Ice Machine
Solid Panel Ready



VBFIC1152D

ACCESSORIES

- PDPUS215SS – Professional Door Panel, Stainless Steel
- CPDUS215SS – Classic Door Panel, Stainless Steel

DESIGN OPTIONS

- Reversible door allows for right or left swing
- Choice of two accessory door handles for each unit
 - Professional Door Panel features the iconic Viking handle for true design integrity
 - Classic Door Panel features a slim handle that coordinates with any kitchen design

WARRANTY

- 2-year full covers complete unit
- 6-year full – sealed refrigeration system
- 90-day full – cosmetic parts such as glass, painted items, and decorative items
- 12-year limited – sealed refrigeration system




5" W. UNDERCOUNTER CLEAR ICE MACHINE

Viking 5 Series – Builder Select Model – VBFIC


| 15" W. UNDERCOUNTER CLEAR ICE MACHINE WITH PUMP | |
|---|--|
| DESCRIPTION | VBFIC1152D |
| Overall Width | 14-7/8" (37.8 cm) |
| Overall Height | 33-3/4" to 34-3/4" (85.7 cm to 88.3 cm) |
| Overall Depth from Rear | To front of door: 23-5/8" (60 cm) To handle: 25-1/2" (64.8 cm) With door at 90° angle: 37-3/8" (94.9 cm) |
| Electrical Requirements | 115V/60Hz/15A |
| Maximum Amp Usage | 3.0 amps |
| Maximum Storage Capacity | 5.5 cu. ft. |
| Cord Length | 6 ft. |
| Interior Finish | Black |
| ENERGY STAR | No |
| Panel Height | 29-21/32" (75.4 cm) |
| Panel Thickness | 5/8" (1.6 cm) or 3/4" (1.9 cm) |
| Panel Type | 2-3/4" (7 cm) Solid Panel |
| Panel Width | 14-3/4" (37.5 cm) |
| Refrigerant Type | R600a |
| Sabbath Mode | Yes |
| Shipping Dimensions | 19" W. x 31" D. x 37" H. |
| Approximate Shipping Weight | 125 lbs. |

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

| Rough-In Opening Dimensions | | | Cabinet Dimensions | | | | | |
|-----------------------------|---------------------------------|----------------|----------------------|---|----------------------|----------------------|----------------------|----------------------|
| A | B | C | D | E | F | G | H | J |
| 15" (61 cm) | 34" to 35" (86.4 to 88.9 cm) | 24" (61 cm) | 14-7/8" (37.8 cm) | 33-3/4" to 34-3/4" (85.7 to 88.3 cm) | 23-5/8" (60.0 cm) | 25-1/2" (64.8 cm) | 37-3/8" (94.9 cm) | 16-5/8" (42.2 cm) |

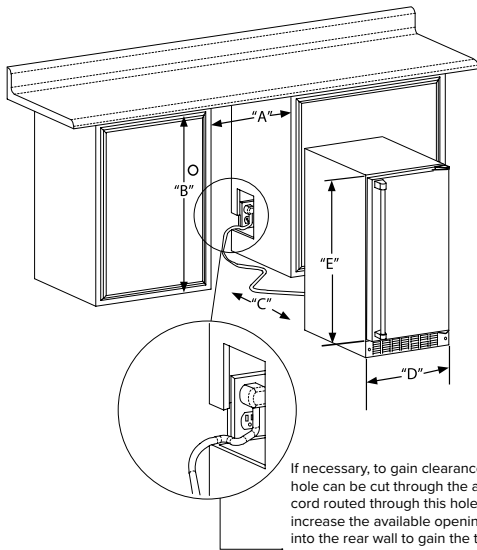

If necessary, to gain clearance inside the rough-in opening, a hole can be cut through the adjacent cabinet and the power cord routed through this hole to a power outlet. Another way to increase the available opening depth is to recess the power outlet into the rear wall to gain the thickness of the power cord plug. Not all recessed outlet boxes will work for this application as they are too narrow, but a recessed outlet box equivalent to Arlington #DVFR1W is recommended for this application.

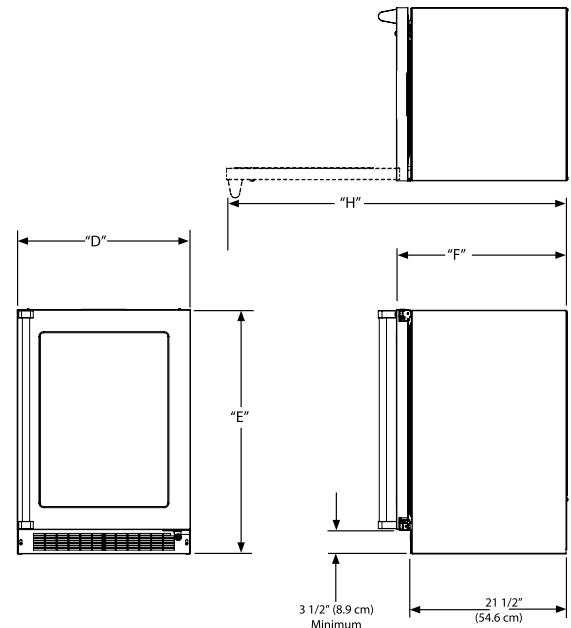

3 1/2" (8.9 cm)
Minimum

21 1/2"
(54.6 cm)



VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit vikingrange.com

© 2025 Viking Range, LLC All rights reserved. Specifications subject to change without notice.