Ideal Tap

High Flow (HF) or Eco Flow (EF)

Specifications

Single-lever control ceramic disk cartridge
Forward rotating COMFORTFEEL™ lever handle
11" CENTERSTATION™ spout projection
11" Pot fill height from deck to spout outlet
Hand spray extends up to 26" from spout
Q-Dock™ docking system holds hand spray in place
Ergonomic slide switch to select Ideal Flow® Laminar or Spray Flow
Automatic return to laminar flow
Concealed easy clean spray face
Spout rotates 360°
Quiet, smooth gliding hose
Counterweight
Dual check valves
24" stainless steel flexible hoses 3/8" compression
Maximum counter thickness 2"
Minimum install hole diameter 1 3/8"
Optional base ring included
Total height 21 1/4"
High Flow 2.2 GPM maximum flow rate
Eco Flow 1.8 GPM maximum flow rate
For use with Water Filtration System* (not included)
*Note: May reduce water flow

Construction

Solid 316L machined stainless steel construction
Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Burnished Bronze
Indoor & outdoor
Limited Lifetime Warranty
Made in Italy

Codes/Standards
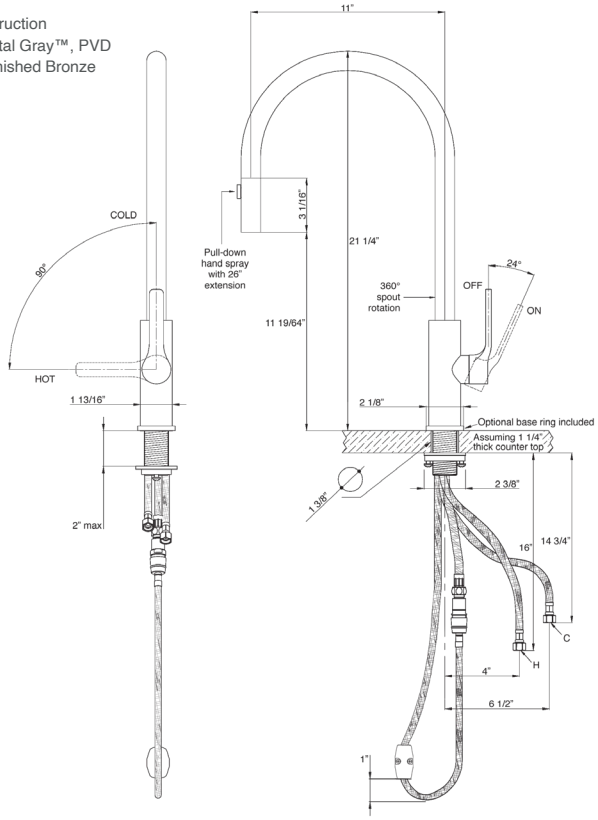
ASME 112.18.1
CSA B125.1
NSF 61, 372
CALGreen
cUPC™
ADA