

# HydroTap Classic Plus BCS Tap

Product Spec Sheet



## HydroTap Classic Plus Boiling/Chilled/Sparkling (BCS) Tap

Offering the choice of instant filtered boiling, chilled and sparkling water, the Classic Plus pairs iconic design with an intuitive touchpad making it the perfect complement to any space.

This HydroTap Classic Plus can be installed over the sink as a secondary tap or over our optional Classic Range Integrated or Classic Range Raised Font / Drip Tray.

The HydroTap Classic Plus is available in six finishes: Chrome, Brushed Chrome, Matte Black, Brushed Gold, Brushed Nickel and Gunmetal.

## HydroTap Classic Plus BCS Tap - Available Finishes



Chrome



Brushed  
Chrome



Matte  
Black



Brushed  
Gold



Brushed  
Nickel



Gunmetal

## Product Order Codes for HydroTap Classic Plus BCS Taps

|                                                 |          |
|-------------------------------------------------|----------|
| HydroTap Classic Plus BCS Tap in Chrome         | 01043225 |
| HydroTap Classic Plus BCS Tap in Brushed Chrome | 01043492 |
| HydroTap Classic Plus BCS Tap in Matte Black    | 01043493 |
| HydroTap Classic Plus BCS Tap in Brushed Gold   | 01043494 |
| HydroTap Classic Plus BCS Tap in Brushed Nickel | 01043496 |
| HydroTap Classic Plus BCS Tap in Gunmetal       | 01043495 |

Please see individual product spec sheets for command center and accessory product specs and order codes.

# HydroTap Classic Plus BCS Tap

## Product Spec Sheet



### Installation Requirements

The HydroTap is a pump-driven system so the installation of the Tap must be within 3' (0.9m) of the base command center. Installation on most countertops is straightforward however, some stone countertops may require a specialized cutting service.


If using a drip tray (font) accessory, suitable drainage to a trapped waste is required within 3' (0.9m) of the installation. Sufficient space and clearance to install the HydroTap as detailed in the product installation guidelines is required.

Installation and connection of your HydroTap must be carried out by a qualified person, observing all local, state, & federal regulations.


### HydroTap Classic Plus BCS - Tap Specs

|                                  |                                                                                      |
|----------------------------------|--------------------------------------------------------------------------------------|
| <b>Style:</b>                    | HydroTap Classic Plus Tap (BCS) - includes boiling water safety lock                 |
| <b>Hole Size:</b>                | 1 - 3/8" / 35mm                                                                      |
| <b>Tap Height:</b>               | 8 1/2" (216mm) or 13 13/16" (351mm) when installed with an optional font / drip tray |
| <b>Installation:</b>             | Over sink as a secondary tap or on optional font / drip tray                         |
| <b>Flow Rate:</b>                | Max 1.8gpm / 6.8lpm                                                                  |
| <b>Sparkling Water Flow Rate</b> | 0.4 gpm / 1.5lpm                                                                     |
| <b>Product Certifications:</b>   | IAPMO - NSF/ANSI 372, 42, 53, CSA B438.1, ASSE 1023, ASSE 1087; cUL; CEC             |
| <b>ADA Compliant:</b>            | Yes                                                                                  |


Classic Plus - Tap View

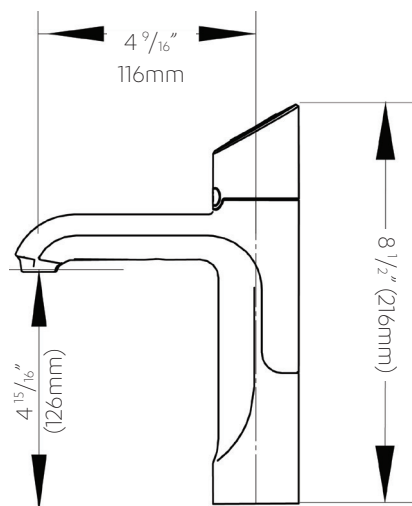

Classic Plus with Raised Font

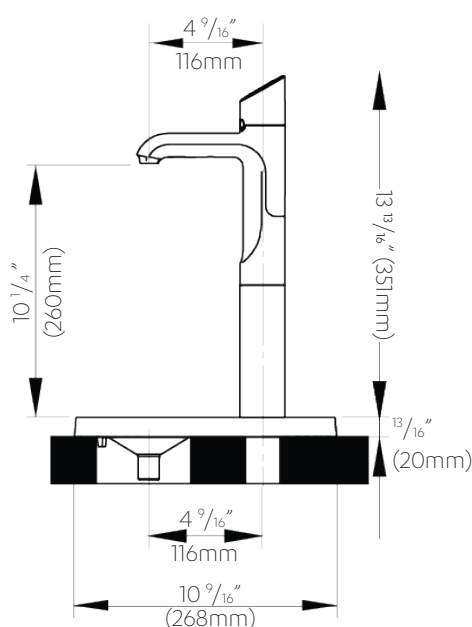

Classic Plus with Integrated Font

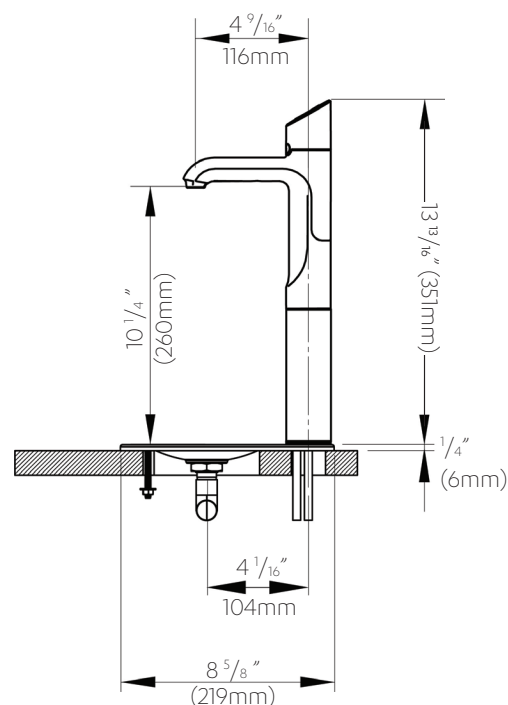

# HydroTap 240V BCS G5 Command Center

## Product Spec Sheet



### HydroTap 240V BCS G5 Command Center

Product Order Code: 01043470

Elevate your drinking water at work by replacing your old, inefficient office water dispenser with a HydroTap BCS 240V system. Employees can enjoy on-demand boiling, chilled, and sparkling water at work.

This command center is ideal for commercial applications with up to 60 users and can be paired with any of our various tap styles.

### HydroTap 240V BCS G5 Command Center - Product Specs

|                                                    |                                                                                                                       |
|----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Product Order Code</b>                          | 01043470                                                                                                              |
| <b>Maximum number of users:</b>                    | Up to 60 people                                                                                                       |
| <b>Water Pressure:</b>                             | Min 37psi – Max 100psi (2.60 - 7.03kg/cm <sup>2</sup> ) with a minimum flow rate of 1 gpm (3.79lpm)                   |
| <b>Water Connection:</b>                           | ½" BSP - isolation valve is required within 3' (0.9m) of the installation                                             |
| <b>Integral Water Values:</b>                      | All HydroTap systems are fitted with a Dual Check Valve and a 50psi (3.52kg/cm <sup>2</sup> ) Pressure Limiting Valve |
| <b>Water Supply Requirements:</b>                  | Potable drinking water supply                                                                                         |
| <b>Optimal Total Dissolved Solids (TDS) Range:</b> | TDS Min 50ppm – Max 150ppm                                                                                            |
| <b>Integral Water Filter:</b>                      | 0.2 micron, 1.5 size - replace every 1,800 gallons / 6,813 liters (~6 months for a large office)                      |
| <b>Power Rating:</b>                               | 220-240V, 50-60Hz, 15 amp power supply with a NEMA 6-15 outlet                                                        |
| <b>Dimensions (WxDxH):</b>                         | 15.5" x 18.2" x 13.1" / 395mm x 464mm x 333mm                                                                         |
| <b>Minimum Air Gap:</b>                            | Minimum of 2" / 50mm clearance on left and right side and 8" / 200mm above                                            |
| <b>Minimum Cabinet Size:</b>                       | 24" wide x 24" deep / 610mm wide x 610mm deep                                                                         |
| <b>Maximum Hose Connection Length</b>              | 3' / 0.9m (tap to command center)                                                                                     |
| <b>Dry Weight:</b>                                 | 90.4lbs / 42kg                                                                                                        |
| <b>Product Approvals:</b>                          | IAPMO - NSF/ANSI 372, 42, 53, CSA B483.1, ASSE 1023, ASSE 1087; cUL; CEC                                              |
| <b>Warranty:</b>                                   | 3 years                                                                                                               |
| <b>Compatible CO<sub>2</sub> Cylinder:</b>         | Zip Water 5lb CO <sub>2</sub> with CGA-320 fitting                                                                    |
| <b>CO<sub>2</sub> Operating Pressure:</b>          | Min 39psi - Max 44psi / Min 2.74 - Max 3.09kg/cm <sup>2</sup>                                                         |

# HydroTap 240V BCS G5 Command Center

## Product Spec Sheet




### Installation Requirements

Installation and connection of your HydroTap must be carried out by a qualified person, observing all local, state, & federal regulations. You will require suitable 220 -240V 50-60Hz, 15 amp power supply with a NEMA 6-15 electrical outlet within 5' 9" (1.75m) of the product.

The HydroTap is a pump-driven system so the installation of the Tap must be within 3' (0.9m) of the base command center. The HydroTap is an air-cooled system so discrete cabinetry cut-outs are required for ventilation. Installation on most countertops is straightforward however, some stone countertops may require a specialized cutting service.

If using a drip tray (font) accessory, suitable drainage to a trapped waste is required within 3' (0.9m) of the installation. If you live in an area with hard water (more than 150ppm), we recommend installation of a scale filtration kit or water softener. Sufficient space and clearance to install the HydroTap as detailed in the product installation guidelines is required.

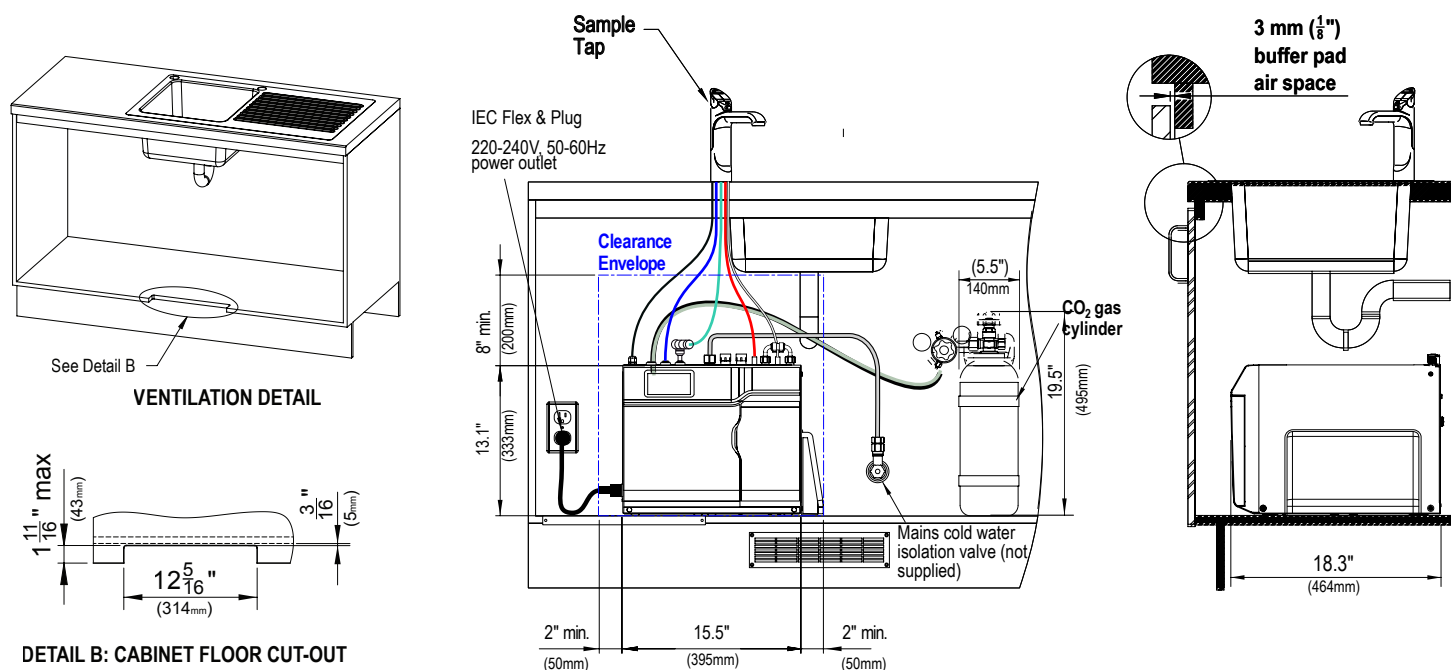

Scan QR code to view  
installation guide.

Technical Installation assistance over phone or video call can be obtained by calling our customer care line at 1-833-233-2358, Monday through Friday 8am - 5pm Central Time.