


# Euro Wall Mount Hood with Ductless Ventilation (ARS)

European styling creates a refined focal point. Patented ARS (Air Recovery System) technology combines centrifugal grease extraction with advanced odor and smoke filtration to recirculate clean air back into the kitchen without ductwork. Dishwasher-safe components simplify cleanup. Matching duct covers and ARS filter assembly sold separately.


To view available finishes & accessories please visit [ventahood.com/products/PDAH14-K30](http://ventahood.com/products/PDAH14-K30)

## SPECIFICATIONS

|                                           |                                  |
|-------------------------------------------|----------------------------------|
| WIDTH                                     | 30"                              |
| DEPTH                                     | 21"                              |
| HEIGHT                                    | 14"                              |
| CFM <sup>1</sup>                          | N/A                              |
| SOUND RATING<br>(HIGH SPEED) <sup>2</sup> | 2.5 Sones / 48.3 dB              |
| LIGHTING <sup>3</sup>                     | 2 LED Prongs<br>3000K Warm White |

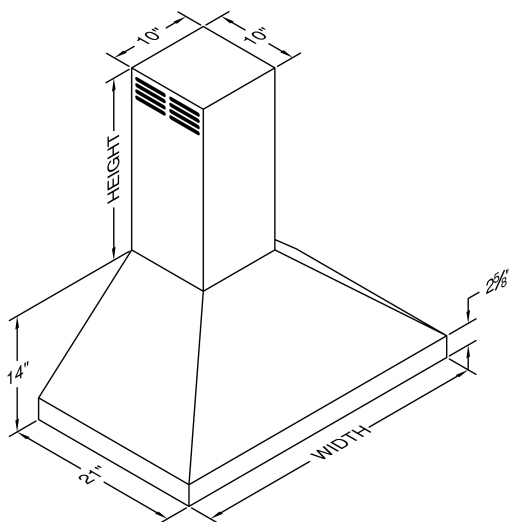


## DUCT COVERS





Wall Mount Duct Cover  
Models: WDCAND-10/22, WDCAND-10/34

## RECOMMENDED MOUNTING HEIGHT

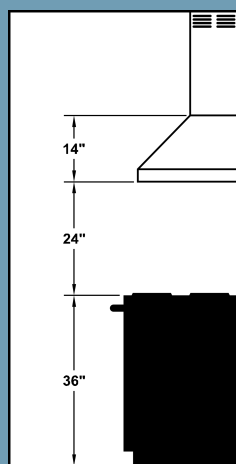

NOTE: Exceeding recommended mounting height may compromise performance.

## CONNECTIONS

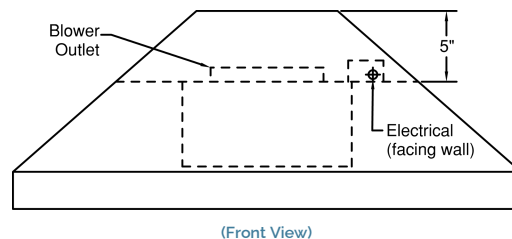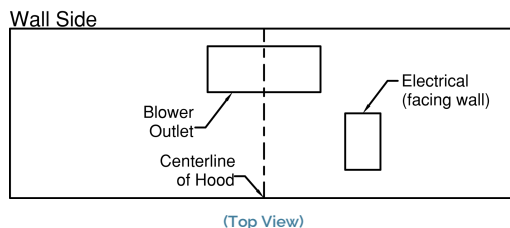

## ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT

| MODEL    | VOLTS | AMPS | HZ | RPM  | CFM<br>@ 0.0" SP <sup>4</sup> | CFM<br>@ 0.1" SP | CFM<br>@ 0.2" SP | CFM<br>@ 0.3" SP | MIN. ROUND<br>DUCT SIZE |
|----------|-------|------|----|------|-------------------------------|------------------|------------------|------------------|-------------------------|
| K250 ARS | 115   | 3.5  | 60 | 1550 | N/A                           | N/A              | N/A              | N/A              | N/A                     |

<sup>1</sup> CFM (cubic feet per minute) measures airflow. <sup>2</sup> Sones measure perceived loudness—lower values indicate quieter operation. Decibel values shown are approximate equivalents. <sup>3</sup> This model is not available with heat lamps. <sup>4</sup> Airflow (CFM) decreases as duct resistance (static pressure) increases. Values at 0.1"–0.3" SP reflect typical installed conditions.