

CONTENTS

1	Handle
2	Standoff
2	Washer, star
2	Screw, #10-24 x 2"


IMPORTANT NOTE: Depending on the model, additional components may be included with this kit but not utilized.

⚠ CAUTION


The door glass orientation is critical. Take note of the glass orientation during disassembly to ensure proper placement after the door handle is installed.

REMOVE THE DOOR

- 1 Open the door.
- 2 On each hinge, pull the hinge retainer clip forward and down into the door until it stops.

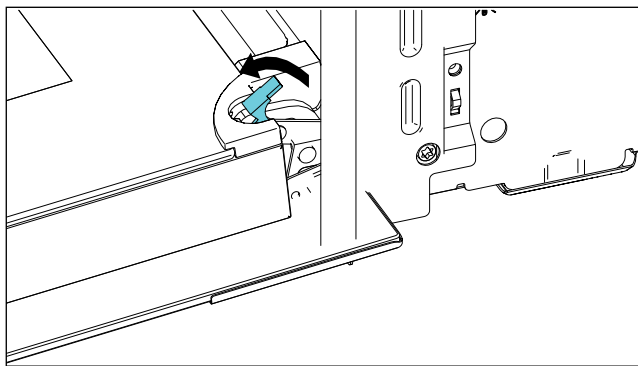


- 3 Close the door until the door stops against the hinge retainer clips.
- 4 Hold the door toward the top on each side.
- 5 Pull the door upward, removing it from the hinges.
- 6 Remove the door from the unit.

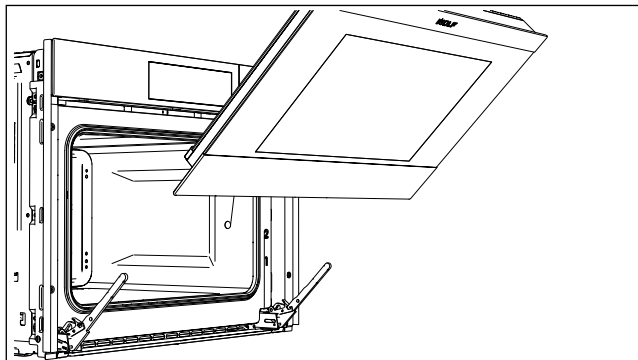


REMOVE THE INNER DOOR GLASS

- 1 Place the door, handle-side down, on a padded surface.
- 2 Use a scribe to push the safety pin, on each side into the door.
- 3 Push the inner door glass up toward the top of the door to compress the springs.
- 4 Lift the bottom of the inner door glass up.
- 5 Remove the inner door glass from the door.

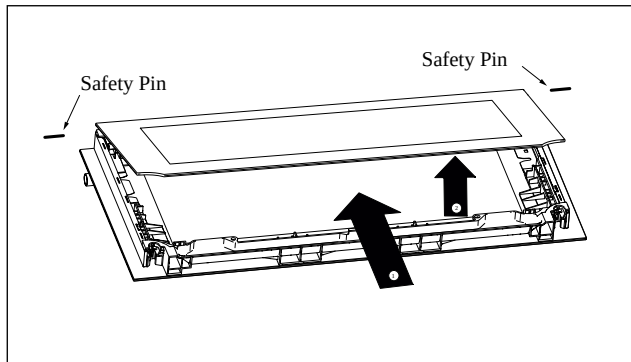


REMOVE THE DOOR GLASS GASKET

- 1 Remove the gasket from the intermediate door glass.

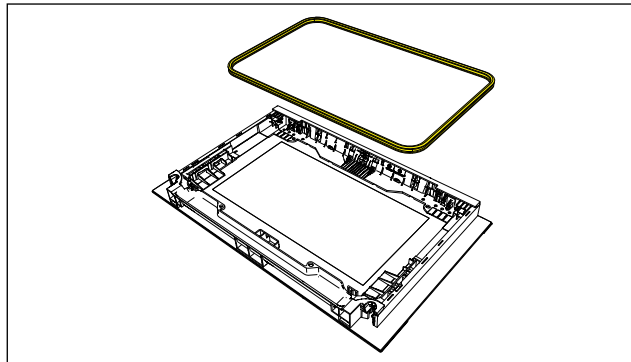

REMOVE THE INTERMEDIATE DOOR GLASS

- 1 Push the intermediate door glass up toward the top of the door to compress the springs.
- 2 Lift the bottom of the intermediate door glass up.
- 3 Remove the intermediate door glass from the door.

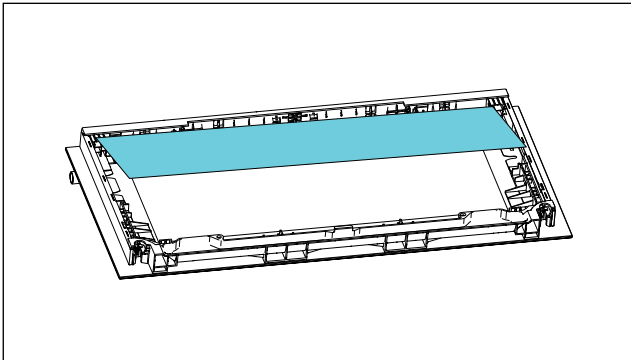

INSTALL THE HANDLE

- 1 Remove and discard the screws securing the standoffs to the handle.
- 2 Place one star washer on each of the two 2" screws provided.
- 3 Loosely place standoffs on the handle, then align the new handle with existing holes.
- 4 Verify the standoffs and standoff graphics are properly positioned, then tighten. Do not over tighten as this may cause the oven glass to break.
- 5 Fully assemble and reinstall the door, then rotate the hinge retainer clip to the closed position.

REMOVE THE DOOR HANDLE

- 1 Use a T-25 Torx bit to remove the handle mounting screws.
- 2 Remove the handle and handle standoffs from the door front.

