LG SIGNATURE

DLGX9701P

LG SIGNATURE 9.0 cu.ft. Front Load Gas Dryer

KEY FEATURES

9.0 cu.ft. Front Load Gas Dryer
TrueSteam® Technology
Electronic Control Panel with LCD Display
Steam Sanitary™
Steamfresh™
ThinQ®



Control Panel



ThinQ App



PRODUCT FEATURES

SUMMARY	
Type	Front Load Dryer
Vent Type	Vented
Dryer Type	Gas
Capacity	9.0 cu. ft.
Matching Washer	WM9700HPA
Sensor Dry	Yes
Steam	Yes
Colors	Platinum Steel(P)
APPEARANCE	
Control & Display	Electronic Control Panel with LCD Display
Hard Buttons	No
Touch Buttons	Yes
Dial-A-Cycle®	No
DRYER PROGRAMS	
No. of Programs	26
Programs	Normal, AI Dry, Bedding, Delicates, Quick Dry, Timed Dry, Perm. Press, SteamFresh™, Heavy Duty, Towels, Air Dry, Pet Care, SteamSanitary™, Power Dry, Low Temp Dry, Super Dry, Activewear, Jeans, Blanket Refresh, Easy Ironing, Small Load, Large Load, XL Load, Wrinkle Prevention, Overnight Dry, Rack Dry
No. of Options	16
Options	Wi-Fi, Remote Start, Drum Light, Control Lock, Cycle List Edit, Signal, Language, Cycle Optimization, Smart Diagnosis, Factory Reset, TurboSteam®, Wrinkle Care, Damp Signal, Energy Saver, Low Static, Delay
Temperature Settings	High / Med. High / Medium / Med. Low / Low
Drying Levels	Very / More / Normal / Less / Damp
Manual Dry Times	10-100min (Each 5min.), Dry Time
FABRIC CARE FEATURES	
AI Sensor Dry	Yes
Sensor Dry	Yes
Precise Temperature Control with Variable Heater	Yes
Precise Temperature Control with Variable Compressor	No
Steam	TurboSteam®
CONVENIENCE FEATURE	
3 Minute Installation Check	Yes
End of Cycle Signal	Yes
Drum Light (door open)	Yes
Reversible Door	Yes
FlowSense® Duct Clogging Indicator	Yes
Wrinkle Care Option	Yes
Control Lock	Yes
Venting Option	3 Way Venting
4 Adjustable Legs	Yes
Remaining Time Display/Status Indicator(s)	Yes

SMART FEATURES (THINQ® TECHNOLOGY)	
Smart Diagnosis (v3.0)	Yes
Wi-Fi	Yes
NFC Tag On Technology	No
ThinQ Care (Remote Start/Cycle Monitor)	Yes
Energy Monitoring	Yes (WiFi)
ENERGY	
ENERGY STAR® Certified	Yes
CEF	3.49
MATERIALS AND FINISHES	
Aluminized Alloy Steel Drum	No
NeveRust® Stainless Steel Drum	Yes
Cabinet	VCM
Door	Tempered Glass Door
All Available Colors	Platinum Steel(P)
POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	120V, 13 Amps
Type	Gas
BTU Rating	20,000
OPTIONS	
LP Conversion Kit	383EEL3002D // LPK1
Side Venting Kit	383EEL9001L
Drying Rack	AHB73109002
Pedestal	WDP8P
Pedestal (WxHxD)	29 x 13 5/8" x 29 1/2" (45 9/16"" D with door open)
DIMENSIONS	
Product (WxHxD)	29" x 40 7/8" x 31 1/2"
Depth with Door Open	53" 3/8
Carton (WxHxD)	30 15/16" x 44 11/16" x 33 3/16"
Weight (Product)	147.9 lbs
Weight (Carton)	160.9 lbs
WARRANTY	
Parts & Labor	2 years
Drum	3 years
UPC CODE	
DLGX9701P	048231350280

© 2025 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 06/24/26

DLGX9701P

LG SIGNATURE Front Load Gas Dryer


IMPORTANT

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.


DIMENSIONS / CLEARANCES

Installation Spacing for Recessed Area or Closet Installation

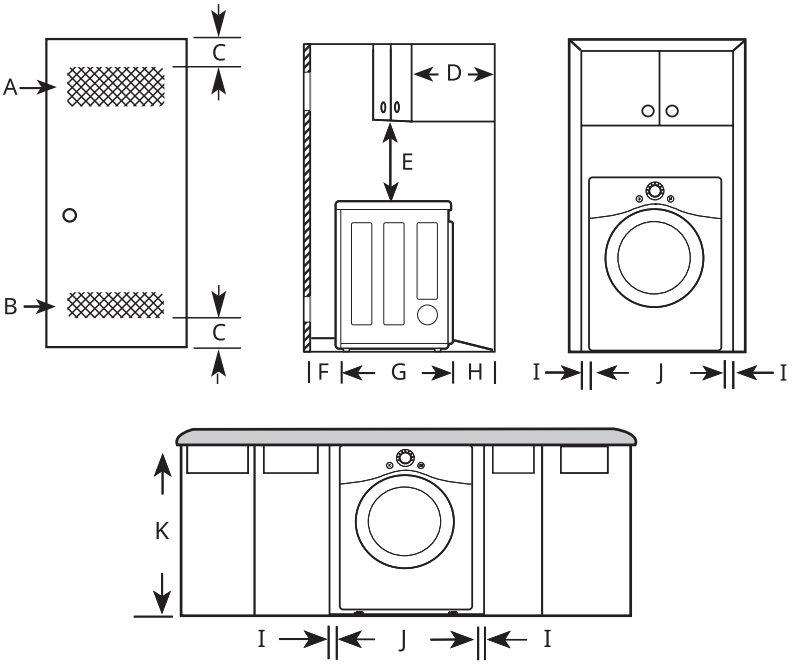

	DESCRIPTION	DIMENSIONS / CLEARANCE
A	Upper Ventilation Opening	≥ 48 sq. in. (310 cm2)
B	Lower Ventilation Opening	≥ 24 sq. in. (155 cm2)
C	Distance to Ventilation Opening	≥ 3" (76 mm)
D	Overhead Cabinet Depth	≤ 14" (356 mm)
E	Distance to the Overhead Cabinet/ Shelf	≥ 18" (457 mm)
F	Front Clearance	1" (25 mm)
G	Depth	31 1/2" (800 mm)
H	Back Clearance	≥ 5" (127 mm)
I	Side Clearance	≥ 1" (25 mm)
J	Width	29" (737 mm)
K	Height of Cabinet Opening	40 7/8" (1037 mm)


INSTALLATION SPACING

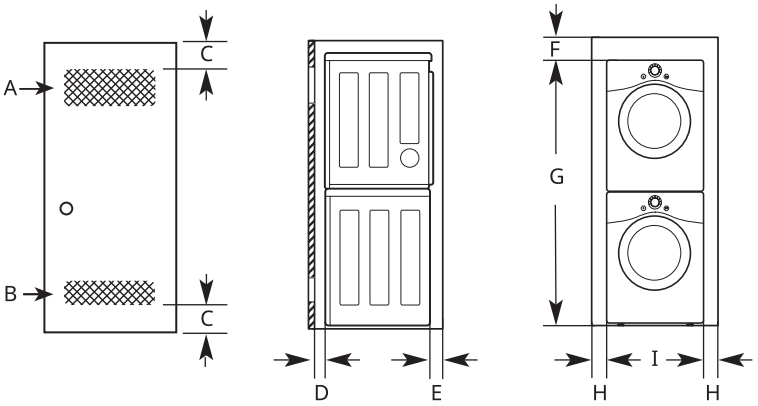

	DESCRIPTION	DIMENSIONS / CLEARANCE
A	Upper Ventilation Opening	≥ 48 sq. in. (310 cm2)
B	Lower Ventilation Opening	≥ 24 sq. in. (155 cm2)
C	Distance to Ventilation Opening	≥ 3" (76 mm)
D	Front Clearance	≥ 1" (25 mm)
E	Back Clearance	≥ 5 1/2" (140 mm)
F	Top Clearance to the Ceiling	≥ 6" (152 mm)
G	Height to the Top of Stacked Appliances †	81 3/4" (2074 mm)
H	Side Clearance	≥ 1" (25 mm)
I	Width †	29" (737 mm)

† Differs depending on the washer dimensions.

INSTALLATION SPACING

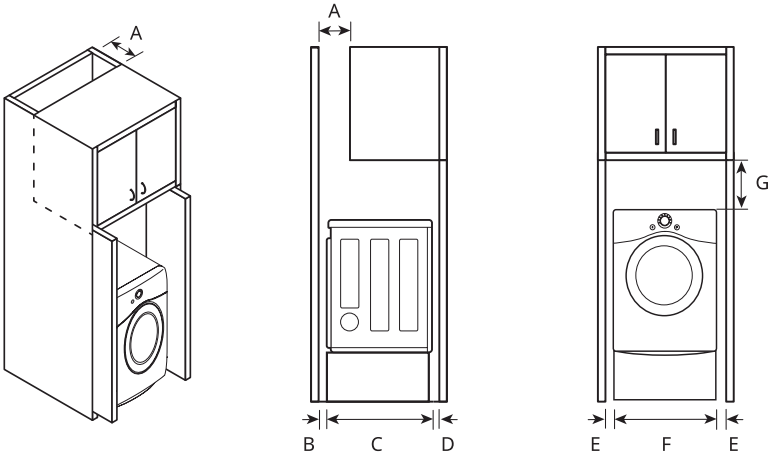

	DESCRIPTION	DIMENSIONS / CLEARANCE
A	Depth of Ventilation Opening	≥ 7" (178 mm)
B	Back Clearance	≥ 5" (127 mm)
C	Depth	31 1/2" (800 mm)
D	Front Clearance	≥ 1" (25mm)
E	Side Clearance	≥ 1" (25 mm)
F	Width	29" (737 mm)
G	Clearance to Top of Cabinet	≥ 9" (229 mm)

© 2025 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 06/04/2026