

SPECIAL ORDER

COMMERCIAL THROUGH RETAIL (CTR)

Speed Queen®

The Proven Performer in Laundry

COIN DROP

STACKED DRYERS
AND STACKED WASHER-DRYERS



Coin Drop

Coin drop payment actuations blend mechanical engineering with convenience. They ensure smooth transactions and efficient machine operation, providing customers with an easy laundry experience and streamlined business operations for owners.

Stacked Dryers *(Tall/Short)*

- Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- Quiet, efficiency blower system


Stacked Washer-Dryers *(Short)*

- Washer is ADA compliant
- Combines heavy-duty construction with reliable operation
- The freestanding softmount design can be installed on all floor types or levels





ENERGY STAR®
Certified Washer

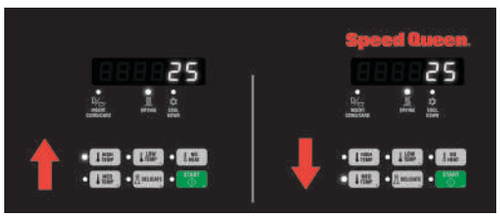

Coin Drop – Stacked Dryer Control Panel



Coin Drop – Stacked Washer-Dryer Control Panel

COMMERCIAL THROUGH RETAIL

COIN DROP
STACKED DRYERS AND STACKED WASHER-DRYERS





Product		Stacked Dryer	
		Tall	Short
Color		White	
Capacity - lb (kg)		18 (8.2) ea	
Cylinder Volume - cu.ft. (liters)		7.0 (198) ea	
Motor (Thermal Protected) - HP		0.33	
Type of Gas (Gas Models Only)		Factory Equipped Natural	
Available Cycles		High, Medium, Low, Delicate, No Heat	
Air Outlet Diameter - in		4	
Exhaust Airflow - cfm (liters/sec)		220 (105)	
Electrical Requirements (v/Hz/Ph-Amp)	*Electric	208-240/60/1-30 Amp	
	Gas	120/60/1-15 Amp	
Heating Element	Electric	5350W, 240V / 4750W, 208V	
	Gas	25,000 Btu	
Net Weight - lb (kg)		270 (122)	
Shipping Weight - lb (kg)		280 (127)	
Shipping Dimensions Approx. - in	Width	33	
	Depth	30	
	Height	80	
Agency Approvals	Electric	cULus	
	Gas	cCSAus	
Model No.		SSENCAGS176TW01 SSGNCAGS116TW01	SSENCFGS176TW01 SSGNCFGS116TW01
Required Coin Kits *(sold separately)*		Coin Box Model #: CK043 *(2 required)*	Coin Box Model #: CK042 *(2 required)*

Product		Stacked Washer-Dryer	
		Washer	Dryer
Color		White	
Capacity - lb (kg)		21.5 (9.5)	18 (8.2)
Cylinder Volume - cu.ft. (liters)		3.42 (96.8)	7.0 (198)
Spin Speed G-Force (RPM)		440 (1200)	–
Motor Size - HP		0.9	0.33
Type of Gas (Gas Models Only)		–	Factory Equipped Natural
Water Consumption Per Cycle - g (liter)**		13.68 (51.8)	–
IWF (Water Factor) - gal/ft³ (liters/liter/cycle)**		4.0 (0.53)	–
MEF_{J2} (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)**		2.20 (62.3)	–
Available Cycles		Normal, Synthetic, Delicate	High, Medium, Low, Delicate, No Heat
Air Outlet Diameter - in		–	4
Exhaust Airflow - cfm (liters/sec)		–	220 (105)
Electrical Requirements (v/Hz/Ph-Amp)	*Electric	120/60/1-15 Amp	208-240/60/1-30 Amp
	Gas	120/60/1-15 Amp	
Heating Element	Electric	–	5350W, 240V 4750W, 208V
	Gas	–	25,000 Btu
Net Weight - lb (kg)		385 (175)	
Shipping Weight - lb (kg)		417 (189)	
Shipping Dimensions Approx. - in	Width	34	
	Depth	30	
	Height	80	
Agency Approvals	Electric	cULus	
	Gas	cCSAus	
Model No.		STENCFSP178TW01, STGNCFSP118TW01	
Required Coin Kits *(sold separately)*		Coin Box Model #: CK042 *(2 required)*	

Note *(not supplied)*: Each stacked dryer pocket requires its own power cord and the stacked washer-dryer requires two power cords, one for washer, one for dryer.

For Commercial Use Only

Dimensions	Width - in	Height - in	Depth - in	Floor to Door Opening - in	Door Swing - in
Stacked Dryer - Tall	26.875	78.17	28	15.44	23.5
Stacked Dryer - Short	26.875	76.5	28	15.44	23.5
Stacked Washer-Dryer - Short	26.875	76.5	27.73	14.5***	23.5

* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

** Average usage based on multiple load sizes and current DOE test protocol. Real usage will vary depending on load size, composition and cycle selectivity.

*** For ADA compliance turn legs out from base 0.5 inches

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For additional accessories and warranty, please refer to the price list.

PREP FOR CARD

FRONT LOAD WASHERS
AND TOP LOAD WASHERS



Prep for Card

Prep for card payment actuations involve integrating a secure and robust digital payment platform. This enhances the customer experience, streamlines transactions, and boosts operational efficiency.

Front Load Washers *(Rear/Front)*

- 440 G-Force extraction speed to maximize moisture removal, reduce dry times and minimize utility costs
- Four-compartment soap dispenser
- Front control washer is ADA compliant

Top Load Washers

- Touch pad control with sound annunciator
- 27 cycle selections
- Multi-level vend pricing
- Extract speed of 710 RPM spins clothes out drier



ENERGY STAR®
Certified Washer





Prep for Card – Front Load Washer Control Panel



Prep for Card – Top Load Washer Control Panel

COMMERCIAL THROUGH RETAIL

PREP FOR CARD
FRONT LOAD WASHERS AND TOP LOAD WASHERS





Product	Front Load Washer	
	Rear Control	Front Control
Color	White	
Capacity - lb (kg)	21.5 (9.5)	
Cylinder Volume - cu.ft. (liters)	3.42 (96.8)	
Spin Speed G-Force (RPM)	440 (1200)	
Motor Size - HP (kw)	0.9 (0.67)	
Water Consumption Per Cycle - g (liter)*	13.68 (51.8)	
IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*	4.0 (0.53)	
MEF_{J2} (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)*	2.20 (62.3)	
Available Water Temperatures	Cold, Warm, Hot	
Available Cycles	Normal, Synthetic, Delicate	
Electrical Requirements (v/Hz/Ph-Amp)	120/60/1-15 Amp	
Water Pressure - p.s.i (bar)	20-120 (1.4/8.3)	
Drain	Pump	
Cylinder Finish	Stainless Steel	
Net Weight - lb (kg)	260 (118)	
Shipping Weight - lb (kg)	270 (122.2)	
Shipping Dimensions Approx. - in — Width	34	
Shipping Dimensions Approx. - in — Depth	30	
Shipping Dimensions Approx. - in — Height	44.5	
Agency Approvals	cULus, ENERGY STAR® certified	
Model No.	SFNNYRSP118TW01	SFNNYASP118TW01

Product	Top Load Washer
Color	White
Capacity - lb (kg)	16 (7.3)
Cylinder Volume - cu.ft. (liters)	3.19 (90.3)
Spin Speed G-Force (RPM)	150 (710)
Motor Size - HP (kw)	0.5 (0.37)
Water Consumption Per Cycle - g (liter)*	28.07 (106)
IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*	8.8 (1.18)
MEF_{J2} (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)*	1.35 (38.2)
Available Water Temperatures	Cold, Warm, Hot
Available Cycles	Normal, Synthetic, Delicate
Electrical Requirements (v/Hz/Ph-Amp)	120/60/1-15 Amp
Water Pressure - p.s.i (bar)	20-120 (1.4/8.3)
Drain	Pump
Cylinder Finish	Stainless Steel
Net Weight - lb (kg)	206 (93.4)
Shipping Weight - lb (kg)	218 (98.8)
Shipping Dimensions Approx. - in — Width	28
Shipping Dimensions Approx. - in — Depth	30
Shipping Dimensions Approx. - in — Height	45
Agency Approvals	cULus
Model No.	SWNNY2SP116TW01

Dimensions	Width - in	Height - in	Depth - in	Floor to Door Opening - in	Door Swing - in
Front Load Washer - Rear Control	26.875	43.875	27.73	14.6	24
Front Load Washer - Front Control	26.875	44.34	27.73	14.6**	24
Top Load Washer	25.625	43	28	51	–

For Commercial Use Only

Supply inject kits available.

* Average usage based on multiple load sizes and current DOE test protocol. Real usage will vary depending on load size, composition and cycle selectivity.

** For ADA compliance turn legs out from base 0.5 inches

For additional accessories and warranty, please refer to the price list.

PREP FOR CARD

SINGLE DRYERS
AND STACKED DRYERS



Prep for Card

Prep for card payment actuations involve integrating a secure and robust digital payment platform. This enhances the customer experience, streamlines transactions, and boosts operational efficiency.

Single Dryers *(Rear/Front)*

- Integrated meter case
- Upfront lint filter easy to clean and secured
- Perfect balance of heat, airflow and tumble action for optimal performance and efficiency
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)

Stacked Dryers *(Tall/Short)*


- Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- Quiet, efficiency blower system







Prep for Card – Single Dryer Control Panel

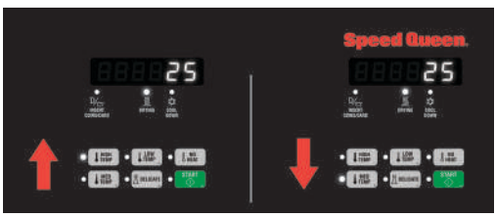

Prep for Card – Stacked Dryer Control Panel

COMMERCIAL THROUGH RETAIL

PREP FOR CARD
SINGLE DRYERS AND STACKED DRYERS







Product		Single Dryer	
		Rear Control	Front Control
Color		White	
Capacity - lb (kg)		18 (8.2)	
Cylinder Volume - cu.ft. (liters)		7.0 (198)	
Motor (Thermal Protected) - HP		0.33	
Type of Gas (Gas Models Only)		Factory Equipped Natural	
Available Cycles		High, Medium, Low, Delicate, No Heat	
Air Outlet Diameter - in		4	
Exhaust Airflow - cfm (liters/sec)		220 (105)	
Electrical Requirements (v/Hz/Ph-Amp)	*Electric	208-240/60/1-30 Amp	
	Gas	120/60/1-15 Amp	
Heating Element	Electric	5350W, 240V / 4750W, 208V	
	Gas	25,000 Btu	
Net Weight - lb (kg)		150 (68)	
Shipping Weight - lb (kg)		161 (73)	
Shipping Dimensions Approx. - in	Width	30.5	
	Depth	29.5	
	Height	45	
Agency Approvals	Electric	cULus	
	Gas	cCSAus	
Model No.		SDENYRGS176TW01 SDGNYRGS116TW01	SDENYAGS176TW01 SDGNYAGS116TW01

Product		Stacked Dryer	
		Tall	Short
Color		White	
Capacity - lb (kg)		18 (8.2) ea	
Cylinder Volume - cu.ft. (liters)		7.0 (198) ea	
Motor (Thermal Protected) - HP		0.33	
Type of Gas (Gas Models Only)		Factory Equipped Natural	
Available Cycles		High, Medium, Low, Delicate, No Heat	
Air Outlet Diameter - in		4	
Exhaust Airflow - cfm (liters/sec)		220 (105)	
Electrical Requirements (v/Hz/Ph-Amp)	*Electric	208-240/60/1-30 Amp	
	Gas	120/60/1-15 Amp	
Heating Element	Electric	5350W, 240V / 4750W, 208V	
	Gas	25,000 Btu	
Net Weight - lb (kg)		270 (122)	
Shipping Weight - lb (kg)		280 (127)	
Shipping Dimensions Approx. - in	Width	33	
	Depth	30	
	Height	80	
Agency Approvals	Electric	cULus	
	Gas	cCSAus	
Model No.		SSENYAGS176TW01 SSGNYAGS116TW01	SSENYFGS176TW01 SSGNYFGS116TW01

Dimensions	Width - in	Height - in	Depth - in	Floor to Door Opening - in	Door Swing - in
Single Dryer - Rear Control	26.875	43	28	15.44	23.5
Single Dryer - Front Control	26.875	44.34	28	15.44	23.5
Stacked Dryer - Tall	26.875	78.17	28	15.44	23.5
Stacked Dryer - Short	26.875	76.5	28	15.44	23.5

Note *(not supplied)*: Each stacked dryer pocket requires its own power cord.

For Commercial Use Only

* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V..

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For additional accessories and warranty, please refer to the price list.

PREP FOR CARD

STACKED WASHER-DRYERS



Prep for Card

Prep for card payment actuations involve integrating a secure and robust digital payment platform. This enhances the customer experience, streamlines transactions, and boosts operational efficiency.

Stacked Washer-Dryers *(Tall)*

- Washer is ADA compliant
- Combines heavy-duty construction with reliable operation
- The freestanding softmount design can be installed on all floor types or levels



ENERGY STAR®
Certified Washer



Prep for Card – Stacked Washer-Dryer Control Panel

COMMERCIAL THROUGH RETAIL

PREP FOR CARD
STACKED
WASHER-DRYERS



Product		Stacked Washer-Dryer	
		Washer	Dryer
Color		White	
Capacity - lb (kg)		21.5 (9.5)	18 (8.2)
Cylinder Volume - cu.ft. (liters)		3.42 (96.8)	7.0 (198)
Spin Speed G-Force (RPM)		440 (1200)	–
Motor Size - HP		0.9	0.33
Type of Gas (Gas Models Only)		–	Factory Equipped Natural
Water Consumption Per Cycle - g (liter)*		13.68 (51.8)	–
IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*		4.0 (0.53)	–
MEF_{32} (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)*		2.20 (62.3)	–
Available Cycles		Normal, Synthetic, Delicate	High, Medium, Low, Delicate, No Heat
Air Outlet Diameter - in		–	4
Exhaust Airflow - cfm (liters/sec)		–	220 (105)
Electrical Requirements (v/Hz/Ph-Amp)	**Electric	120/60/1-15 Amp	208-240/60/1-30 Amp
	Gas	120/60/1-15 Amp	
Heating Element	Electric	–	5350W, 240V / 4750W, 208V
	Gas	–	25,000 Btu
Net Weight - lb (kg)		385 (175)	
Shipping Weight - lb (kg)		417 (189)	
Shipping Dimensions Approx. - in	Width	34	
	Depth	30	
	Height	80	
Agency Approvals	Electric	cULus	
	Gas	cCSAus	
Model No.		STENYASP178TW01, STGNYASP118TW01	

Dimensions	Width - in	Height - in	Depth - in	Floor to Door Opening - in	Door Swing - in
Stacked Washer-Dryer - Tall	26.875	78.17	28	14.6***	24

Note *(not supplied)*: Stacked washer-dryer requires two power cords, one for washer, one for dryer.

For Commercial Use Only

* Average usage based on multiple load sizes and current DOE test protocol.
Real usage will vary depending on load size, composition and cycle selectivity.

** Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

*** For ADA compliance turn legs out from base 0.5 inches.

For additional accessories and warranty, please refer to the price list.

PUSH-TO-START

TOP LOAD WASHERS, SINGLE DRYERS AND STACKED DRYERS

Push-to-Start

Push-to-start actuations optimize laundry room efficiency without sacrificing performance. They provide easy push-to-start activation indicated by “In Use” light.

Top Load Washers

- Automatic Balancing Suspension provides the industry’s best out-of-balance handling, completing wash cycles without interruption
- Extract speed of 710 RPM spins clothes out drier
- Curved four-vane polypropylene agitator provides 210° agitation stroke which delivers superior washability

Single Dryers *(Rear)*

- Integrated meter case
- Upfront lint filter easy to clean and secured
- Perfect balance of heat, airflow and tumble action for optimal performance and efficiency
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)


Stacked Dryers *(Tall)*

- Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- Quiet, efficiency blower system










Push-to-Start – Top Load Washer Control Panel



Push-to-Start – Single Dryer Control Panel

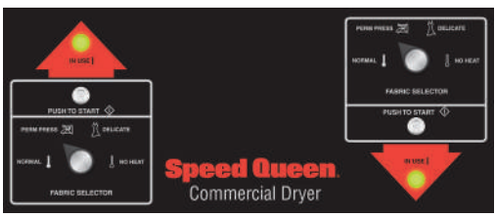

Push-to-Start – Stacked Dryer Control Panel

COMMERCIAL THROUGH RETAIL

PUSH-TO-START
TOP LOAD WASHERS, SINGLE DRYERS, AND STACKED DRYERS







Product		Single Dryer Rear Control	Stacked Dryer Tall
Color		White	
Capacity - lb (kg)		18 (8.2)	18 (8.2) ea
Cylinder Volume - cu.ft. (liters)		7.0 (198)	7.0 (198) ea
Motor (Thermal Protected) - HP		0.33	
Type of Gas (Gas Models Only)		Factory Equipped Natural/Mixed Gas	
Available Cycles		Normal, Perm Press, Delicate, No Heat	
Air Outlet Diameter - in		4	
Exhaust Airflow - cfm (liters/sec)		220 (105)	
Electrical Requirements (v/Hz/Ph-Amp)	*Electric	208-240/60/1-30 Amp	
	Gas	120/60/1-15 Amp	
Heating Element	Electric	5350W, 240V	5350W, 240V 4750W, 208V
	Gas	25,000 Btu	
Net Weight - lb (kg)		150 (68)	262 (119)
Shipping Weight - lb (kg)		161 (73)	272 (123.4)
Shipping Dimensions Approx. - in	Width	30.5	33
	Depth	29.5	30
	Height	45	80
Agency Approvals	Electric	cULus	
	Gas	cCSAus	
Model No.		SDEMNRGS173TW01 SDGMNRGS113TW01	SSEMNAGS173TW01 SSGMNAGS113TW01

Product		Top Load Washer
Color		White
Capacity - lb (kg)		16 (7.3)
Cylinder Volume - cu.ft. (liters)		3.19 (90.3)
Spin Speed G-Force (RPM)		150 (710)
Motor Size - HP (kw)		0.5 (0.37)
Water Consumption Per Cycle - g (liter)**		28.07 (106)
IWF (Water Factor) - gal/ft^3 (liters/liter/cycle)**		8.8 (1.18)
MEF$_{3\hat{A}}$ (Modified Energy Factor) ft^3/kWh/cycle (Liters/kWh/cycle)**		1.35 (38.2)
Available Cycles		Normal Hot, Normal Warm, Normal Cold, Delicate, Perm Press Cold, Perm Press Warm
Electrical Requirements (v/Hz/Ph-Amp)		120/60/1-15 Amp
Water Pressure - p.s.i (bar)		20-120 (1.4/8.3)
Drain		Pump
Cylinder Finish		Stainless Steel
Net Weight - lb (kg)		206 (93.4)
Shipping Weight - lb (kg)		218 (98.8)
Shipping Dimensions Approx. - in	Width	28
	Depth	30
	Height	45
Agency Approvals		cULus
Model No.		SWNMN2SP115TW01

Dimensions	Width - in	Height - in	Depth - in	Floor to Door Opening - in	Door Swing - in
Single Dryer - Rear Control	26.875	43	28	15.44	23.5
Stacked Dryer - Tall	26.875	78.17	28	15.44	23.5
Top Load Washer	25.625	43	28	51	–

Note *(not supplied)*: Each stacked dryer pocket requires its own power cord.

For Commercial Use Only

* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

** Average usage based on multiple load sizes and current DOE test protocol. Real usage will vary depending on load size, composition and cycle selectivity.

For additional accessories and warranty, please refer to the price list.

COIN SLIDE
STACKED DRYERS




Coin Slide

Coin Slide actuations offer heavy-duty operation, is easy to use and offers the basic features needed for optimal laundry room operations.

Stacked Dryers *(Tall)*

- Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- Quiet, efficiency blower system



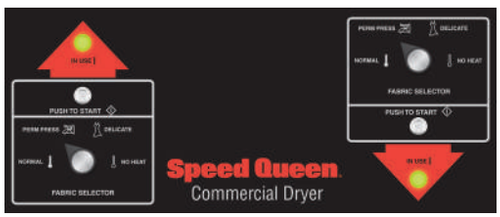

Coin Slide – Stacked Dryer Control Panel

COMMERCIAL THROUGH RETAIL

COIN SLIDE STACKED DRYERS



Product		Stacked Dryer Tall
Color		White
Capacity - lb (kg)		18 (8.2) ea
Cylinder Volume - cu.ft. (liters)		7.0 (198) ea
Motor (Thermal Protected) - HP		0.33
Type of Gas (Gas Models Only)		Factory Equipped Natural
Available Cycles		Normal, Perm Press, Delicate, No Heat
Air Outlet Diameter - in		4
Exhaust Airflow - cfm (liters/sec)		220 (105)
Electrical Requirements (v/Hz/Ph-Amp)	*Electric	208-240/60/1-30 Amp
	Gas	120/60/1-15 Amp
Heating Element	Electric	5350W, 240V / 4750W, 208V
	Gas	25,000 Btu
Net Weight - lb (kg)		270 (122)
Shipping Weight - lb (kg)		277 (126)
Shipping Dimensions Approx. - in	Width	33
	Depth	30
	Height	80
Agency Approvals	Electric	cULus
	Gas	cCSAus
Model No.		SSESXAGS173TW01, SSGSXAGS113TW01
Required Coin Kits *(sold separately)*		Coin Box Model #: CK124 *(2 required)*

Dimensions	Width - in	Height - in	Depth - in	Floor to Door Opening - in	Door Swing - in
Stacked Dryer - Tall	26.875	78.17	28	15.44	23.5

Note *(not supplied)*: Each stacked dryer pocket requires its own power cord.

For Commercial Use Only

* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For additional accessories and warranty, please refer to the price list.

NON-VENDED
FRONT LOAD WASHERS

Electronic

Non-Vended Electronic controls offer an easy to read digital display and features a variety of cycle and temperature settings to assure the best laundering possible.

Mechanical

Non-Vended Mechanical control provides easy to start activation indicated by “In Use” light.

Front Load Washers - Electronic *(Rear/Front)*

- Redesigned four compartment soap dispenser for simplified use and cleaning
- Revolutionary suspension and sensing technology
- Easy to read digital display

Front Load Washers - Mechanical *(Tall)*

- Revolutionary balancing technology
- Durable stainless steel tub
- Four compartment soap dispenser



ENERGY STAR®
Certified Washer



Non-Vended – Electronic Rear & Front Control Front Load Washer Control Panel



ENERGY STAR®
Certified Washer



Non-Vended – Mechanical Rear Control Front Load Washer Control Panel

COMMERCIAL THROUGH RETAIL

NON-VENDED
FRONT LOAD WASHERS





Product	Electronic - Front Load Washer	
	Rear Control	Front Control
Color	White	
Capacity - lb (kg)	21.5 (9.5)	
Cylinder Volume - cu.ft. (liters)	3.42 (96.8)	
Spin Speed G-Force (RPM)	440 (1200)	
Motor Size - HP (kw)	0.9 (0.67)	
Water Consumption Per Cycle - g (liter)*	13.68 (51.8)	
IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*	4.0 (0.53)	
MEF_{J2} (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)*	2.20 (62.3)	
Available Water Temperatures	Cold, Warm, Hot	
Available Cycles	Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse & Spin, Spin	
Electrical Requirements (v/Hz/Ph-Amp)	120/60/1-15 Amp	
Water Pressure - p.s.i (bar)	20-120 (1.4/8.3)	
Drain	Pump	
Cylinder Finish	Stainless Steel	
Net Weight - lb (kg)	260 (118)	
Shipping Weight - lb (kg)	270 (122.5)	
Shipping Dimensions Approx. - in — Width	34	
Shipping Dimensions Approx. - in — Depth	30	
Shipping Dimensions Approx. - in — Height	44.5	
Agency Approvals	cULus, ENERGY STAR® certified	
Model No.	LFNE5RSP119TW01	LFNE5BSP119TW01

Product	Mechanical - Front Load Washer
Color	White
Capacity - lb (kg)	21.5 (9.5)
Cylinder Volume - cu.ft. (liters)	3.42 (96.8)
Spin Speed G-Force (RPM)	440 (1200)
Motor Size - HP (kw)	0.9 (0.67)
Water Consumption Per Cycle - g (liter)*	13.68 (51.8)
IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*	4.0 (0.53)
MEF_{J2} (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)*	2.20 (62.3)
Available Water Temperatures	Cold, Warm, Hot
Available Cycles	Heavy Duty/Permanent Press, Normal Eco, Delicate/Bulky, Rinse & Spin, Spin Only
Electrical Requirements (v/Hz/Ph-Amp)	120/60/1-15 Amp
Water Pressure - p.s.i (bar)	20-120 (1.4/8.3)
Drain	Pump
Cylinder Finish	Stainless Steel
Net Weight - lb (kg)	260 (118)
Shipping Weight - lb (kg)	270 (122.5)
Shipping Dimensions Approx. - in — Width	34
Shipping Dimensions Approx. - in — Depth	30
Shipping Dimensions Approx. - in — Height	44.5
Agency Approvals	cULus, ENERGY STAR® certified
Model No.	LFN50RSP119TW01

Dimensions	Width - in	Height - in	Depth - in	Floor to Door Opening - in	Door Swing - in
Electronic - Front Load Washer - Rear Control	26.875	43	27.73	14.6**	24.06
Electronic - Front Load Washer - Front Control	26.875	40.42	27.73	14.6**	24.06
Mechanical - Front Load Washer - Rear Control	26.875	43	27.73	14.6	24.06

For Commercial Use Only

Supply inject kits available.

* Average usage based on multiple load sizes and current DOE test protocol. Real usage will vary depending on load size, composition and cycle selectivity.

** For ADA compliance turn legs out from base 0.5 inches

Note: Not all options are available for all models.

For additional accessories and warranty, please refer to the price list.

NON-VENDED

SINGLE DRYERS AND STACKED DRYERS

Electronic

Non-Vended Electronic controls offer an easy to read digital display and features a variety of cycle and temperature settings to assure the best laundering possible.

Single Dryers *(Rear/Front)*

- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- Moisture sensing technology
- Efficiency and fast dry cycle

Stacked Dryers *(Tall)*

- 2.06 sq. ft. door opening is the largest in the industry, providing easy loading and unloading
- Quiet, efficient blower system
- Upfront lint filter easy to clean and secured







Non-Vended – Electronic Rear & Front Control Single Dryer Control Panel



Non-Vended – Electronic Stacked Dryer Control Panel

COMMERCIAL THROUGH RETAIL

NON-VENDED
SINGLE DRYERS AND STACKED DRYERS







Product		Single Dryer	
		Rear Control	Front Control
Color		White	
Capacity - lb (kg)		18 (8.2)	
Cylinder Volume - cu.ft. (liters)		7.0 (198)	
Motor (Thermal Protected) - HP		0.33	
Type of Gas (Gas Models Only)		Factory Equipped Natural/Mixed Gas	
Available Cycles		Regular, Permanent Press, Delicate, Time Dry, Quick Dry, Fluff Up	
Air Outlet Diameter - in		4	
Exhaust Airflow - cfm (liters/sec)		220 (105)	
Electrical Requirements (v/Hz/Ph-Amp)	*Electric	208-240/60/1-30 Amp	
	Gas	120/60/1-15 Amp	
Heating Element	Electric	5350W, 240V	5350W, 240V 4750W, 208V
	Gas	25,000 Btu	
Net Weight - lb (kg)		126 (57.2)	
Shipping Weight - lb (kg)		136 (61.7)	
Shipping Dimensions Approx. - in	Width	30.5	
	Depth	29.5	
	Height	45	
Agency Approvals	Electric	cULus	
	Gas	cCSAus	
Model No.		LDEE7RGS173TW01 LDGE7RGS113TW01	LDEE5BGS173TW01 LDGE5BGS113TW01

Product		Stacked Dryer - Tall
Color		White
Capacity - lb (kg)		18 (8.2) ea
Cylinder Volume - cu.ft. (liters)		7.0 (198) ea
Motor (Thermal Protected) - HP		0.33
Type of Gas (Gas Models Only)		Factory Equipped Natural/Mixed Gas
Available Cycles		Regular, Permanent Press, Delicate, Time Dry, Quick Dry, Fluff Up
Air Outlet Diameter - in		4
Exhaust Airflow - cfm (liters/sec)		220 (105)
Electrical Requirements (v/Hz/Ph-Amp)	*Electric	208-240/60/1-30 Amp
	Gas	120/60/1-15 Amp
Heating Element	Electric	5350W, 240V / 4750W, 208V
	Gas	25,000 Btu
Net Weight - lb (kg)		262 (119)
Shipping Weight - lb (kg)		272 (123.4)
Shipping Dimensions Approx. - in	Width	33
	Depth	30
	Height	80
Agency Approvals	Electric	cULus
	Gas	cCSAus
Model No.		LSEE5AGS173TW01 LSGE5AGS113TW01

Dimensions	Width - in	Height - in	Depth - in	Floor to Door Opening - in	Door Swing - in
Single Dryer - Rear Control	26.875	43	28	15.44	23.5
Single Dryer - Front Control	26.875	40.42	28	15.44	23.5
Stacked Dryer - Tall	26.875	78.17	28	15.44	23.5

Note *(not supplied)*: Each stacked dryer pocket requires its own power cord.

For Commercial Use Only

* Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For additional accessories and warranty, please refer to the price list.

NON-VENDED

TOP LOAD WASHERS AND STACKED WASHER-DRYERS

Electronic

Non-Vended Electronic controls offer an easy to read digital display and features a variety of cycle and temperature settings to assure the best laundering possible.

Top Load Washers

- Automatic Balancing Suspension provides the industry's best out-of-balance handling, completing wash cycles without interruption.
- Curved four-vane polypropylene agitator provides 210° agitation stroke which delivers superior washability
- Extract speed of 710 RPM spins clothes out drier

Stacked Washer-Dryers *(Tall)*

- Freestanding softmount design can be installed on all floor types or levels
- Industry-leading 1200 RPM spin speed exerts 440 G-Force extraction
- Includes cycle status indicator lights





ENERGY STAR®
Certified Washer



Non-Vended – Electronic
Top Load Washer Control Panel



Non-Vended – Electronic
Stacked Washer-Dryer Control Panel

COMMERCIAL THROUGH RETAIL

NON-VENDED
TOP LOAD WASHERS AND STACKED WASHER-DRYER





Product	Top Load Washer
Color	White
Capacity - lb (kg)	16 (7.3)
Cylinder Volume - cu.ft. (liters)	3.17 (89.76)
Spin Speed G-Force (RPM)	150 (710)
Motor Size - HP (kw)	0.5 (0.37)
Water Consumption Per Cycle - g (liter)*	27.9 (105.61)
IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*	8.8 (1.18)
MEF_{32} (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)*	1.35 (38.2)
Available Water Temperatures	Cold, Warm, Hot
Available Cycles	Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse & Spin, Spin
Electrical Requirements (v/Hz/Ph-Amp)	120/60/1-15 Amp
Water Pressure - p.s.i (bar)	20-120 (1.4/8.3)
Drain	Pump
Cylinder Finish	Stainless Steel
Net Weight - lb (kg)	186 (84.4)
Shipping Weight - lb (kg)	196 (88.9)
Shipping Dimensions Approx. - in — Width	28
Shipping Dimensions Approx. - in — Depth	30
Shipping Dimensions Approx. - in — Height	45
Agency Approvals	cULus
Model No.	LWNE22SP115TW01

Product		Stacked Washer-Dryer	
		Washer	Dryer
Color		White	
Capacity - lb (kg)		21.5 (9.5)	18 (8.2)
Cylinder Volume - cu.ft. (liters)		3.42 (96.8)	7.0 (198)
Spin Speed G-Force (RPM)		440 (1200)	–
Motor Size - HP		0.9	0.33
Type of Gas (Gas Models Only)		–	Factory Equipped Natural/Mixed Gas
Water Consumption Per Cycle - g (liter)*		13.68 (51.8)	–
IWF (Water Factor) - gal/ft³ (liters/liter/cycle)*		4.0 (0.53)	–
MEF_{32} (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)*		2.20 (62.3)	–
Available Cycles		Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse & Spin	Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up
Air Outlet Diameter - in		4	
Exhaust Airflow - cfm (liters/sec)		220 (105)	
Electrical Requirements (v/Hz/Ph-Amp)	**Electric	120/60/1-15 Amp	208-240/60/1-30 Amp
	Gas	120/60/1-15 Amp	120/60/1-15 Amp
Heating Element	Electric	–	5350W, 240V 4750W, 208V
	Gas	–	25,000 Btu
Net Weight - lb (kg)		350 (158.8)	
Shipping Weight - lb (kg)		380 (172.4)	
Shipping Dimensions Approx. - in	Width	34	
	Depth	30	
	Height	80	
Agency Approvals	Electric	cULus	
	Gas	cCSAus	
Model No.		LTEE5ASP179TW01 LTGE5ASP119TW01	

Note *(not supplied)*: Stacked washer-dryer requires two power cords, one for washer, one for dryer.

For Commercial Use Only

Dimensions	Width - in	Height - in	Depth - in	Floor to Door Opening - in	Door Swing - in
Top Load Washer	25.625	43	28	51	–
Stacked Washer-Dryer - Tall	26.875	78.17	27.73	14.6***	24

* Average usage based on multiple load sizes and current DOE test protocol. Real usage will vary depending on load size, composition and cycle selectivity.

** Electric dryers are dual rated for 208-240V applications. Using dryer in 208V will reduce the wattage output. An optional kit (61928) can be used to field convert the unit for 4750 output at 208V.

Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

*** For ADA compliance turn legs out from base 0.5 inches.

For additional accessories and warranty, please refer to the price list.



Speed Queen

The Proven Performer in Laundry

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management systems of Alliance Laundry Systems are registered to ISO 9001.

Printed in the USA.

Speed Queen by Alliance Laundry Systems

©2025 Alliance Laundry Systems LLC

AR25-0049

Commercial product is not authorized for sale to Residential end consumers.