FEATURES



HDDW36DS 36" CHIMNEY DRAWER HOOD WITH UNIQUE SLIDE-OUT CANOPY DESIGN

Available Sizes: Widths	36"
Available Finishes: Stainless Steel	
Installation Type	Wall
Cooktop Accordance	Designed for installation with all non-professional cooktops.
CONVENIENCE	
Dishwasher-Safe Filters	V
40 Hrs. Clean Filter "Reminder" Light	✓
Delayed Shut-off 10 Minutes	✓
Halogen Lighting	J
PERFORMANCE	
PERFORMANCE Integral Ventilator Option (CFM)	CFM 600, Supplied with hood
Integral Ventilator Option (CFM)	with hood
Integral Ventilator Option (CFM) Discharge Direction	with hood Vertical 4.5 Amps @120 V
Integral Ventilator Option (CFM) Discharge Direction Electrical Motor Rating @ 120 V AC, 60 Hz	with hood Vertical 4.5 Amps @120 V AC, 60 Hz 15 Amps (min.) @
Integral Ventilator Option (CFM) Discharge Direction Electrical Motor Rating @ 120 V AC, 60 Hz Power Supply @ 120 V AC, 60 Hz	with hood Vertical 4.5 Amps @120 V AC, 60 Hz 15 Amps (min.) @ 120 V AC, 60 Hz

Hoods and Chimney Covers are UL and CUL approved.

SPECS / DIMENSIONS


CENEDAL INFODMATION

GENERAL INFORMATION	
Transition Included*	V
Approximate Shipping Weight	75 lbs.
TRANSITION REQUIRED	
Duct Size at Discharge (inches)	6"
DIMENSIONS (INCHES)	
Canopy Dimensions - (Height)	26-3/4"-42-1/2"
Canopy Dimensions - (Depth)	17"-25-5/8"

35-1/2"

Diagrams

Canopy Dimensions - (Width)

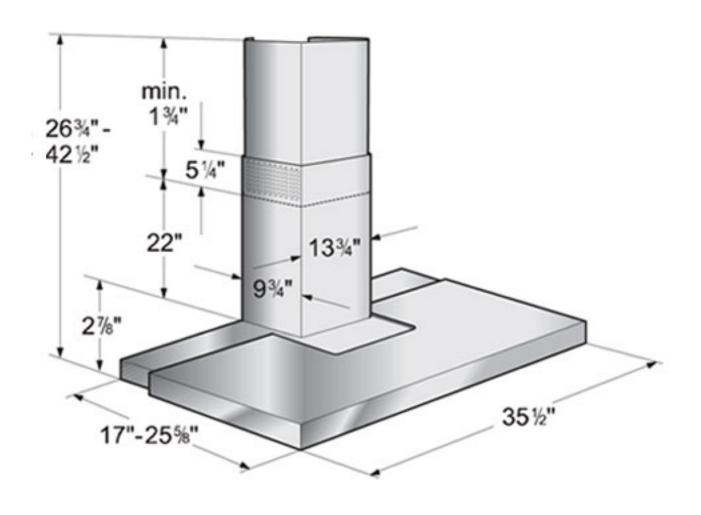

Hoods and Chimney Covers are UL and CUL approved.