

MIW-XT

MAX[®] IN WALL[™] POWER MANAGEMENT EXTENDER SYSTEM

MIW-XT extends noise free, safe power from Panamax / Furman Power Management components to remote panel displays, ceiling mounted video projectors and powered sub-woofers. Discreetly hides behind electronic equipment for a neat, clean, code compliant and professional installation.

- Ultra-thin profile can allow equipment to hang less than one inch from the wall.
- EMI/RFI noise filtration built into outlet receptacle.
- Power and signal lines are *hidden in the wall behind panel displays* for a clean, tidy and professional installation.
- Extend Connected Equipment Policy to remote equipment when used with Panamax/Furman Power Management components.
- Accommodates optional MIW Signal Line Modules (sold separately, contact Panamax or Furman).
- Compatible with most standard electrical boxes.
- CSA Certified for code compliant installations.
- 3 Year Product Warranty


MODEL: MIW-XT

Elegant, nickel plated steel faceplates with brushed metal finish.




Signal bay on both INLET and OUTLET provides a wide variety of optional installation solutions by using:


Decora[®] Adapters




Pass-Through Inserts

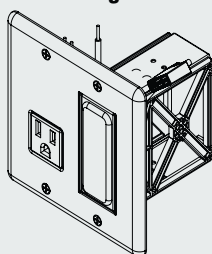

Keystone 2-Port Adapter

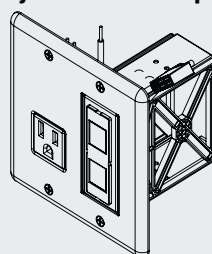

MIW Signal Line Modules*

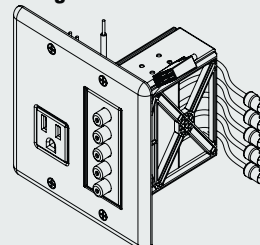


*MIW modules sold separately



PF Power By Panamax-Furman

L611-PFP REV. A

FEATURES



Pass-through inserts feature adjustable depth settings and can accommodate grommet (shown above) or Keystone 2-port adapter.



Clip secures plug to inlet faceplate.

MIW-XT inlet faceplate



6 ft. IEC / NEMA Inlet Faceplate power cord



MIW-XT outlet faceplate

Plug clip


Flat plug adapter cord

6 Wire nuts

Keystone 2-Port Adapters

Decora Adapters can accommodate 6-port insert (insert not included)


Rear view of faceplate assembly. Compatible with most standard electrical boxes.

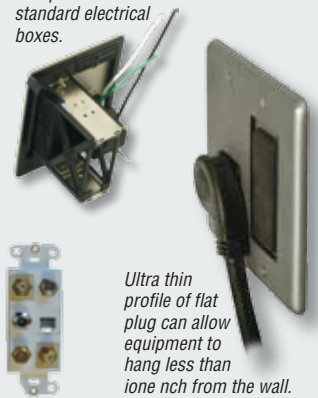


Ultra thin profile of flat plug can allow equipment to hang less than one inch from the wall.

TYPICAL APPLICATION


6 FOOT IEC/NEMA INLET POWER CORD

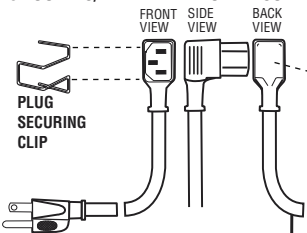


INLET FACEPLATE



OPTIONAL PIECES INCLUDED FOR SIGNAL BAYS (2 ea.)



Decora[®] Adapters can accommodate a 6-port insert. (6-port insert not included)




Keystone 2-Port Adapters


Pass-Through Inserts accommodate Keystone adapters or grommets. Features adjustable depth settings. Removable for MIW signal line modules.

Sturdy Rubber Grommets for wires/cables to enter/exit for a snug fit.


OUTLET FACEPLATE



SIGNAL BAY*



11 INCH FLAT PLUG ADAPTER POWER CORD

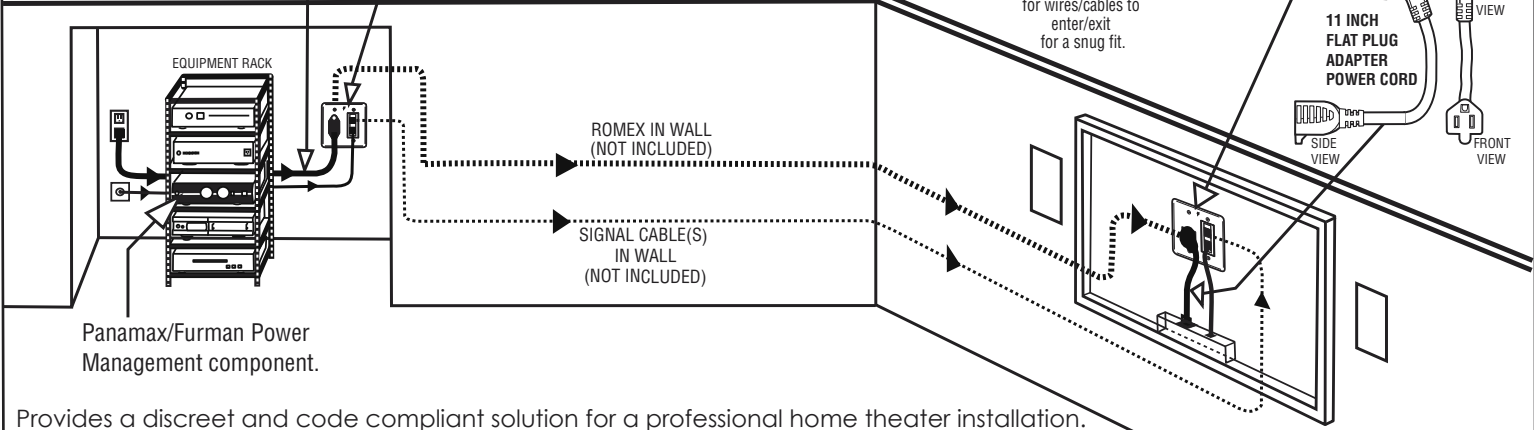

Provides a discreet and code compliant solution for a professional home theater installation.

*Signal Bay can also accommodate MIW Signal Line Modules (sold separately).

TECHNICAL SPECIFICATIONS

AC CIRCUIT

AC Outlets, Total.....1
Line Voltage.....120V, 60Hz
Total Current Capacity.....15A

IEC POWER INLET CORD

Length.....6 ft.
Connectors.....IEC 320-C13 and NEMA 5-15

FLAT PLUG AC POWER CORD

Length.....11 inches
Connectors.....NEMA 5-15P and NEMA 5-15R

POWER INLET FACEPLATE

AC Connector.....IEC 320 C14
Signal Line Protection not included, modules sold separately*

POWER OUTLET FACEPLATE

AC Connector.....NEMA 5-15
Noise Filtration.....Level 1
Signal Line Protection not included, modules sold separately*

GENERAL

Product Warranty.....3 years

*Contact Panamax or Furman for signal line protection modules.

Design and specifications subject to change without notice due to product improvement.

SHIPPING DIMENSIONS, WEIGHTS AND UPC CODES

Single Pack Dimensions.....7.25"W x 5"D x 7"H
Single Pack Weight.....4 lbs.
Single Unit UPC.....0 50616 00848 8
Master Pack Dimensions.....15"W x 10.5" D x 7.5" H
Master Pack Qty.....4 Kits
Master Pack Weight.....17 lbs.
Master Pack UPC.....5 00 50616 00848 3

Model: MIW-XT



L611-PFP REV. A



1690 Corporate Circle, Petaluma, CA 94954 800-472-5555 • 707-283-5900