


Product and Cut-out Dimensions

F1471Vi

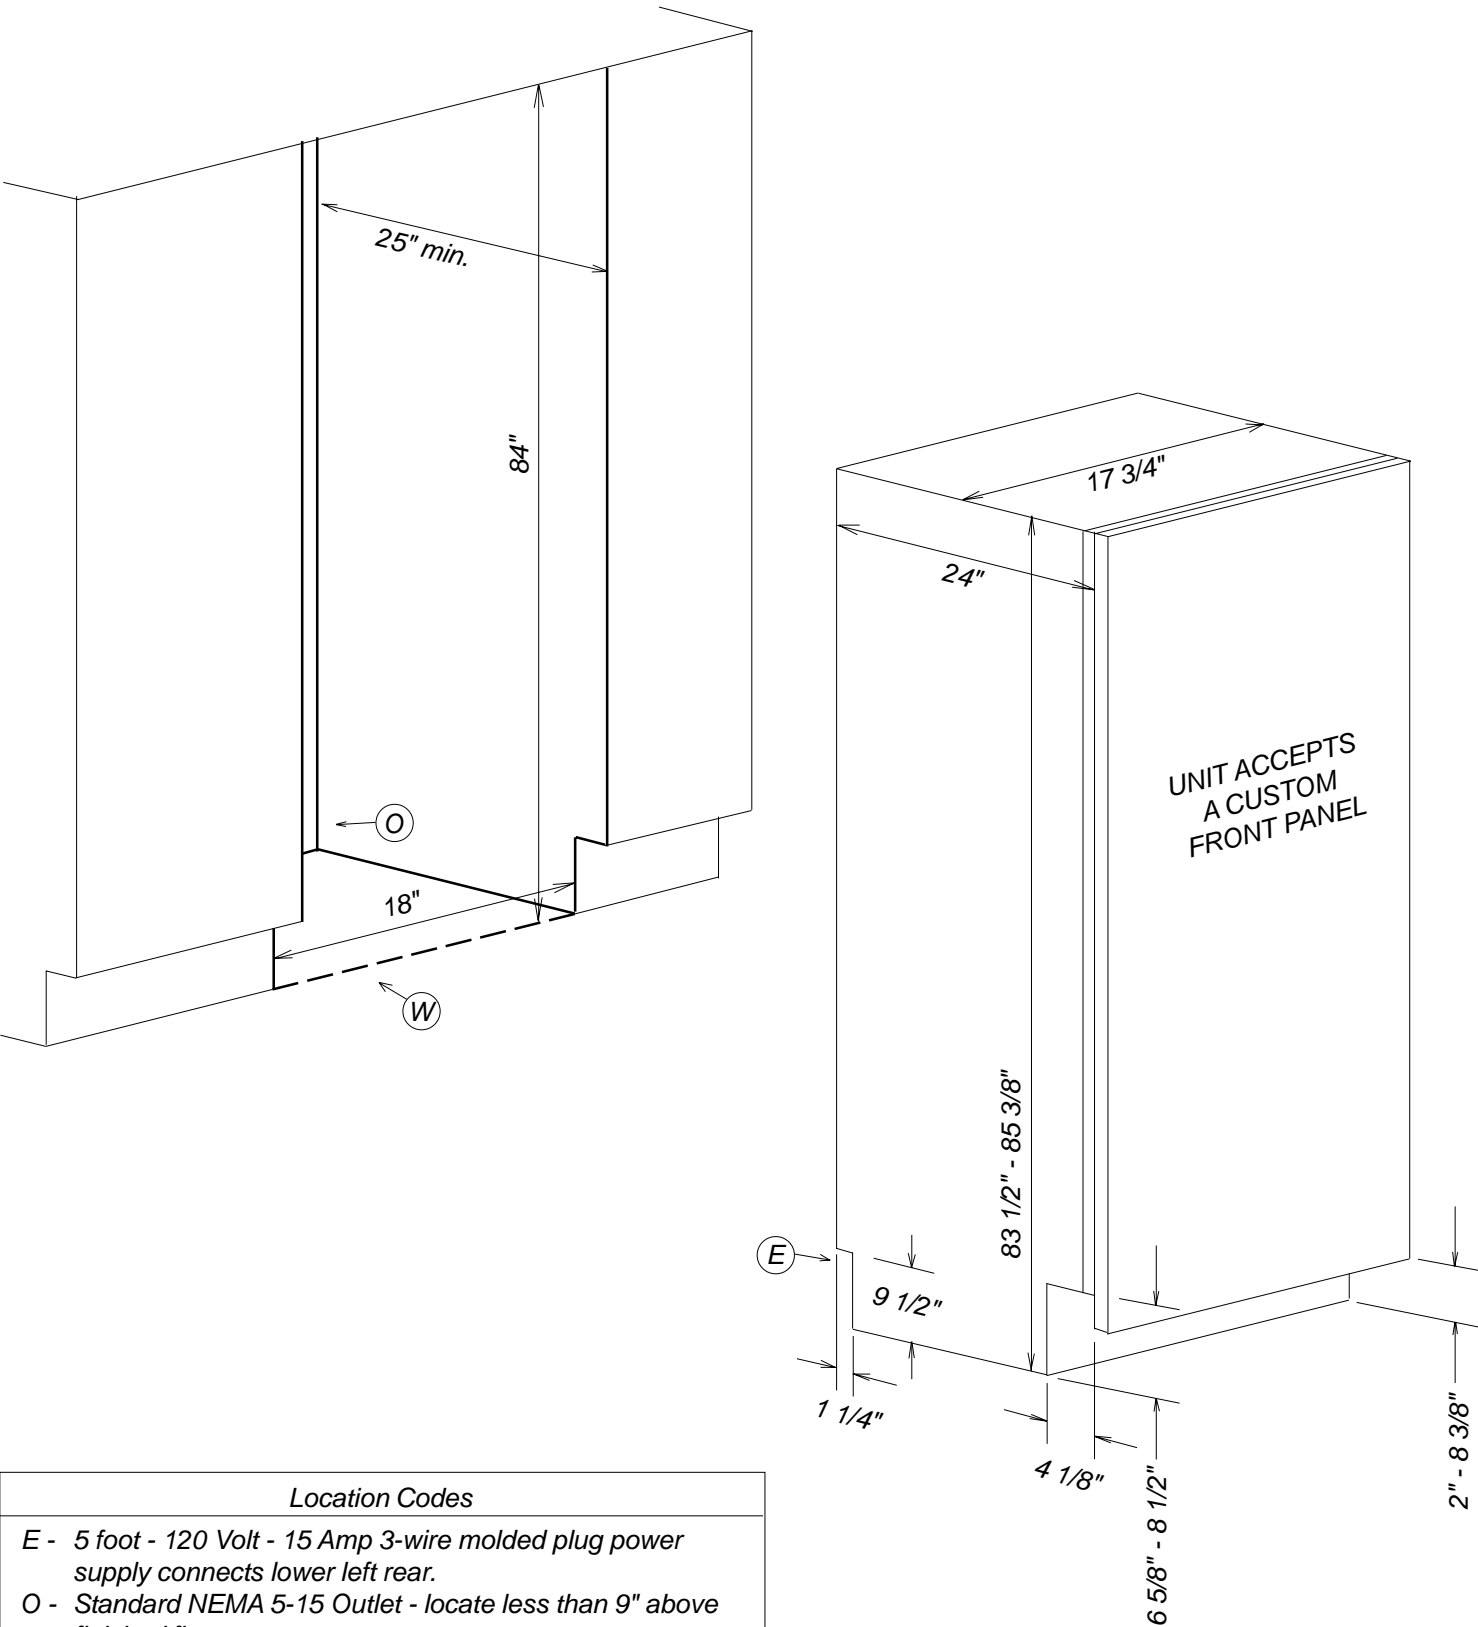


Location Codes
E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear.
O - Standard NEMA 5-15 Outlet - locate less than 9" above finished floor
W - 1/4" flexible water line - tape to floor
Notes
• All Installations must be done in accordance with local codes

NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 010808

Product and Cut-out Dimensions

F1471Vi

Dispenser location

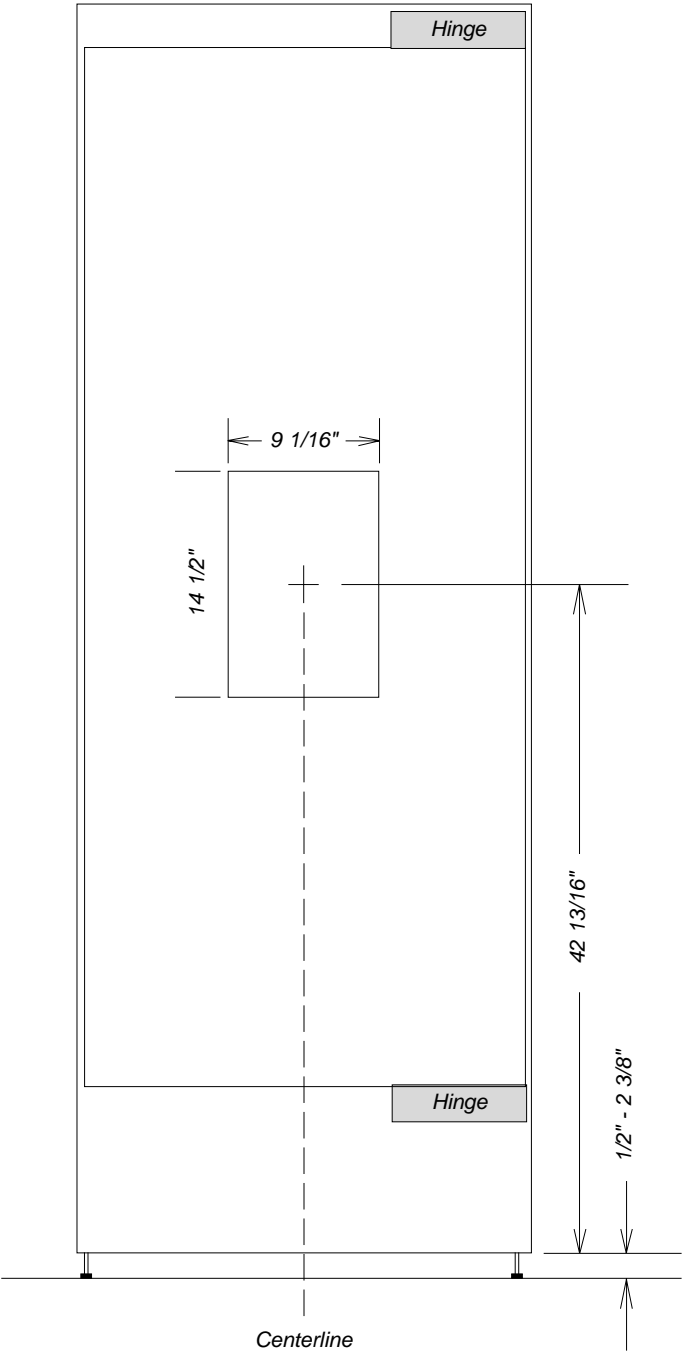

Notes
• Centerpoint is 43 13/16" with typical 84" installation

NOTE: Drawing is not to scale.
SPECIFICATION SHEETS 010808

Front Panel Information


Fully Integrated Model



Custom Panel Installations

These units do not come equipped with a front panel. They are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the panels to align with the surrounding cabinets.

Panel size is determined in the following manner:

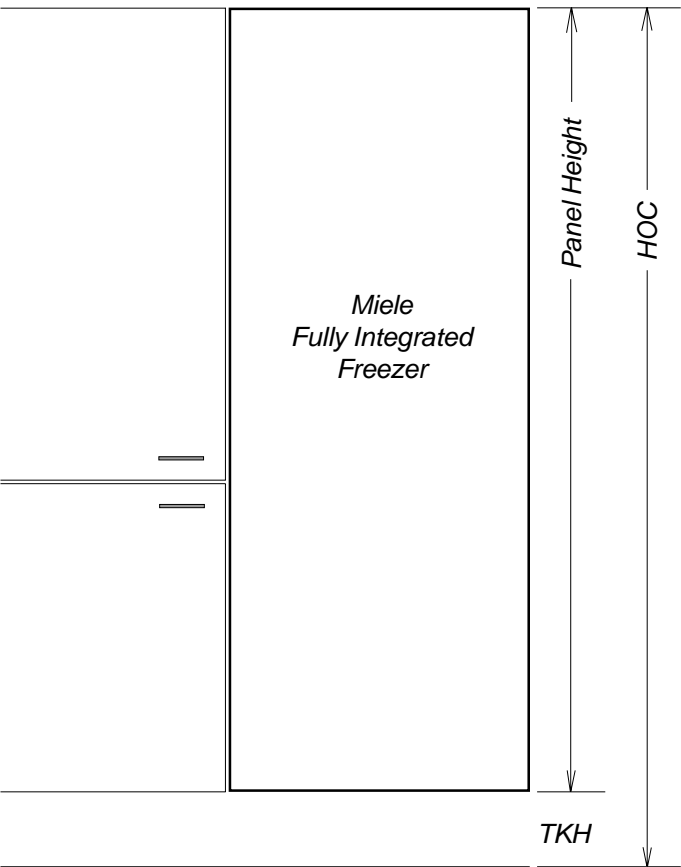

Width: 17 3/4" in all cases

Thickness: Minimum 3/4" outside frame

Height: Determined using the following calculation:

$$\text{Panel Height} = \text{HOC} - \text{TKH}$$

HOC = Total height of cabinet or side panel


TKH = Toe-kick height

Note: Panel may extend above unit.
This is **not** considered in height calculation

Maximum panel weight: 50 Pounds

Panel Notes

If the adjoining cabinets are taller than the height of machine (HOM) - the front panel may be extended accordingly. Simply maintain the toekick height and extend the panel the needed distance.

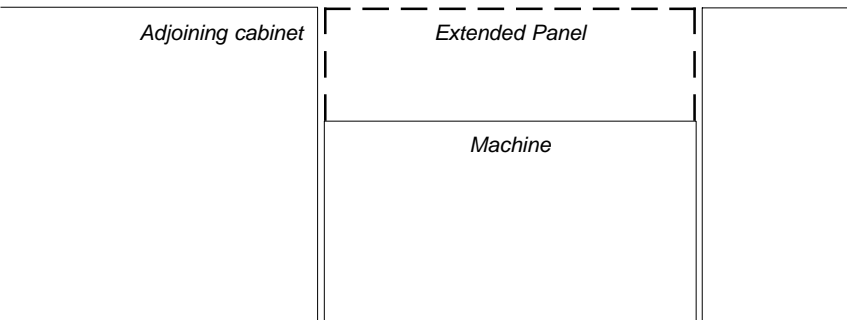


Front Panel Information

Hinging Details




90° Door

Thickness options

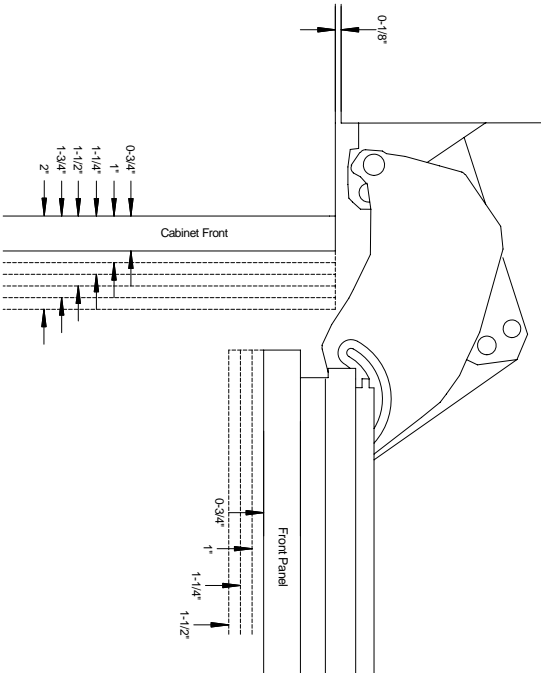


Door Swing

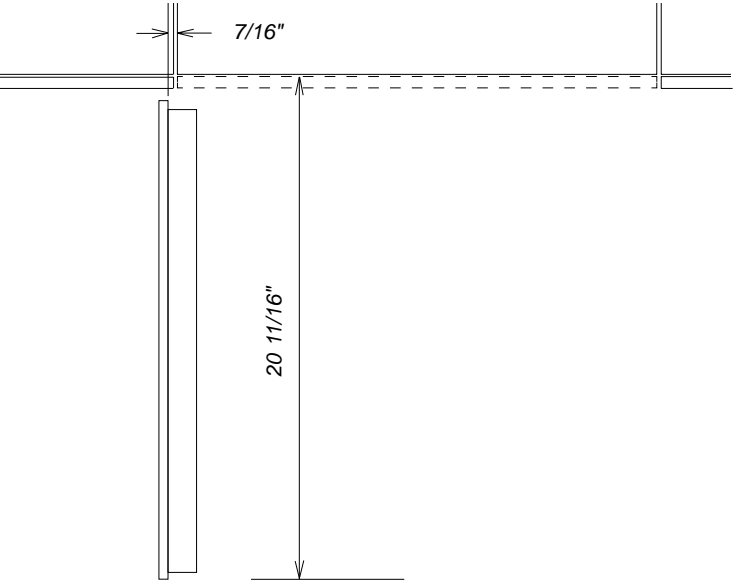


NOTE: Additional space needed depending on thickness of front panels and handle used

115° Door

Thickness options

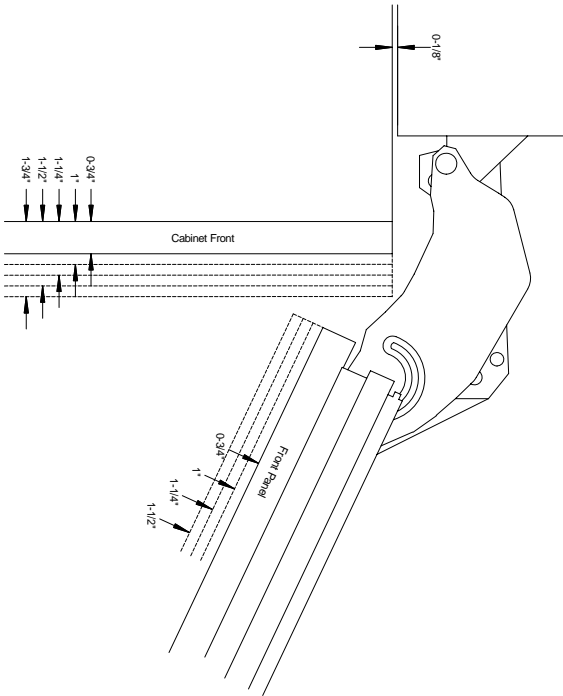

Door Swing

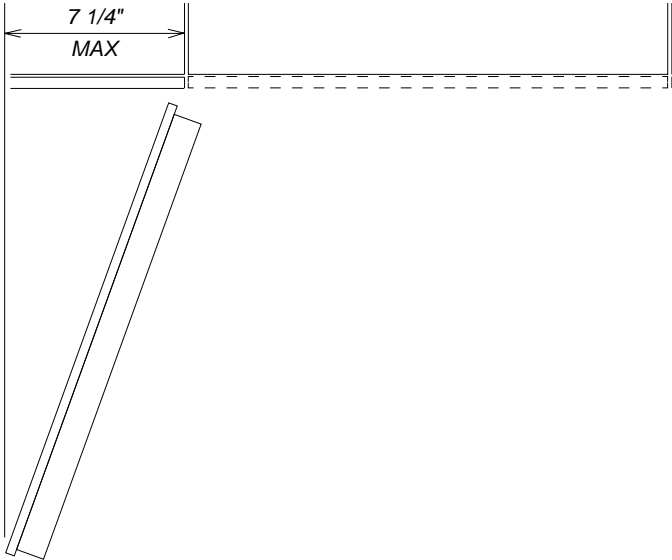

NOTE: Additional space needed depending on thickness of front panels and handle used