

VP4X (LEFT); VP4XR (CENTER); VP4XS (RIGHT)

Sonance Visual Performance® Series

Visual Performance Series Small Speakers

Sonance Visual Performance Series speakers combine elegant, modern style with outstanding audio performance. New micro-trim grilles have only 0.20" of trim, giving these speakers a clean, sleek appearance that seamlessly integrates into any designed space. The grilles attach via powerful magnets, for simple, quick installation. A one-step paint process saves time compared to traditional flanged speakers.

Visual Performance Series Small speakers are available in three shapes — rectangular, square and round, so the designer and installer can select the shape that best suits the architectural space while providing the level of sound quality desired by the client.


Features:

- Micro-trim steel grille has only 0.20" of trim for a sleek, modern appearance. Powerful neodymium magnet grille attachment eases installation.
- Available in three shapes (rectangle, square, and round), so the designer can select the shape that best suits the architectural space while satisfying the client's desire for high-quality audio performance.
- Carbon fiber cone woofers and silk dome tweeters deliver audiophile-quality sound.
- Pivoting tweeters direct sound at listeners for improved stereo performance, even from less-than-ideal mounting locations.
- All Visual Performance Series Small speakers can be retrofitted into existing cutouts for Sonance Original Series Small speakers without modification.
- Grilles and frames can be painted together, saving installation time.
- Roto-Lock® mounting clamps and FastMount® tabs allow quick, easy installation.

Visual Performance Series Small speakers deliver audiophile-quality sound via carbon fiber cone woofers and silk dome tweeters. Pivoting tweeters direct sound at listeners for excellent stereo performance, even if the speakers are mounted in less-than-ideal locations.

Visual Performance Series Small speakers can be retrofitted into mounting holes for Sonance Original Series Small speakers without modification, making upgrades exceptionally easy. Visual Performance Series Small speakers can also be used with accessories for Sonance Original Series Small speakers.

Dimensions:

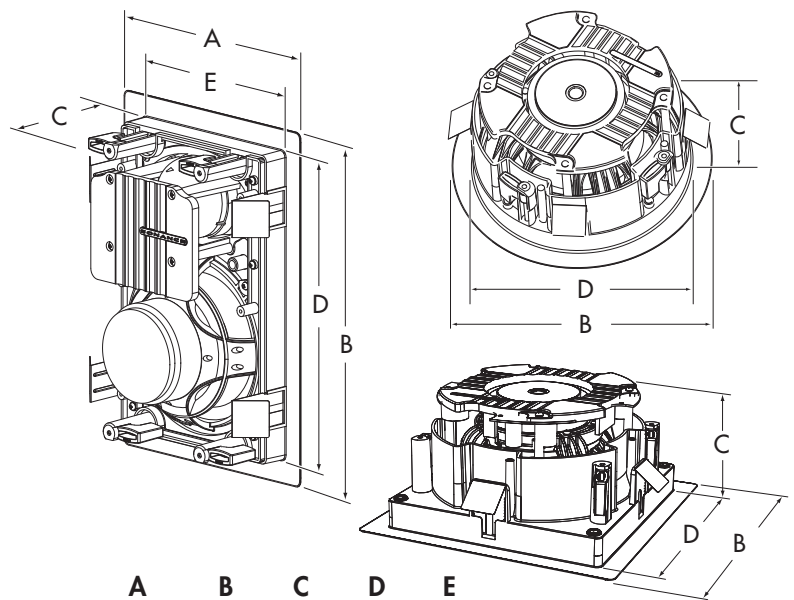

	A	B	C	D	E
VP4X	5 ⁹ / ₁₆ " 142mm	8 ⁷ / ₈ " 225mm	3" 76mm	8 ¹ / ₁₆ " 205mm	4 ⁵ / ₈ " 118mm
VP4XS	6 1/2" 165mm	6 1/2" 165mm	3 ⁵ / ₈ " 92mm	5 ⁵ / ₈ " 143mm	5 ⁵ / ₈ " 143mm
VP4XR	6 ⁷ / ₈ " Dia. 175mm	3 1/2" 89mm	5 ⁷ / ₈ " Dia. 149mm		

Visual Performance Series Small Speakers



Specifications:

VP49, VP49S, VP49R

Tweeter:	1" (25mm) beryllium dome, ferrofluid-cooled, pivoting, in acoustic back chamber
Woofer:	4 1/2" (114mm) beryllium cone with a rubber surround
Frequency Response:	50Hz – 20kHz ±3dB
Impedance:	6 ohms nominal; 4 ohms minimum
Power Handling:	5 watts minimum; 100 watts maximum
Sensitivity:	90dB SPL (2.83V/1 meter)
Grille:	Perforated steel
Dimensions	
VP49 (W x H x D):	5 9/16" x 8 7/8" x 3" (142mm x 225mm x 76mm)
VP49S (W x H x D):	6 1/2" x 6 1/2" x 3 5/8" (165mm x 165mm x 92mm)
VP49 R (Dia. x D):	6 7/8" x 3 1/2" (175mm x 89mm)
Cut-Out Dimensions	
VP49(W x H):	4 5/8" x 8" (117mm x 203mm)
VP49S (W x H):	5 5/8" x 5 5/8" (143mm x 143mm)
VP49 R (Dia. x D):	5 7/8" (149mm)
Shipping Weight:	6 lbs (2.8kg) pair

VP45, VP45S, VP45R

Tweeter:	1" (25mm) silk dome, pivoting
Woofer:	4 1/2" (114mm) carbon fiber cone with a rubber surround
Frequency Response:	58Hz – 20kHz ±3dB
Impedance:	8 ohms nominal; 6 ohms minimum
Power Handling:	5 watts minimum; 70 watts maximum
Sensitivity:	90dB SPL (2.83V/1 meter)
Grille Material:	Perforated steel
Dimensions	
VP45 (W x H x D):	5 9/16" x 8 7/8" x 3" (142mm x 225mm x 76mm)

VP45S (W x H x D):	6 1/2" x 6 1/2" x 3 5/8" (165mm x 165mm x 92mm)
VP45R (Dia. x D):	6 7/8" x 3 1/2" (175mm x 89mm)
Cutout Dimensions	
VP45 (W x H):	4 5/8" x 8 1/16" (117mm x 205mm)
VP45S (W x H):	5 5/8" x 5 5/8" (143mm x 143mm)
VP45R (Dia):	5 5/8" (149mm)
Shipping Weight:	6 lbs (2.8kg) pair

VP41, VP41S, VP41R

Tweeter:	3/4" (19mm) silk dome
Woofer:	4 1/2" (114mm) polypropylene cone with a rubber surround
Frequency Response:	70Hz - 20kHz ±3dB
Impedance:	8 ohms nominal; 6 ohms minimum
Power Handling:	5 watts minimum; 50 watts maximum
Sensitivity:	89dB SPL (2.83V/1 meter)
Grille:	Perforated steel
Dimensions	
VP41(W x H x D):	5 9/16" x 8 7/8" x 3" (142mm x 225mm x 76mm)
VP41S (W x H x D):	6 1/2" x 6 1/2" x 3 5/8" (165mm x 165mm x 92mm)
VP41R (Dia. x D):	6 7/8" x 3 1/2" (175mm x 89mm)
Cut-Out Dimensions	
VP41(W x H):	4 5/8" x 8" (117mm x 203mm)
VP41S (W x H):	5 5/8" x 5 5/8" (143mm x 143mm)
VP41R (Dia. x D):	5 7/8" (149mm)
Shipping Weight:	6 lbs (2.8kg) pair

SONANCE®

212 Avenida Fabricante
 San Clemente, CA 92672-7531 USA
 (800) 582-7777 or (949) 492-7777
 FAX: (949) 361-5151
 Technical Support: (800) 582-0772
 WWW.SONANCE.COM



INSTALLED VISUAL PERFORMANCE SERIES SPEAKER

©2009 Sonance, All Rights Reserved.

Sonance, Visual Performance, Roto-Lock and FastMount are registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice.

For the latest Sonance product information, go to:

www.sonance.com