


PK22 RANGE HOOD

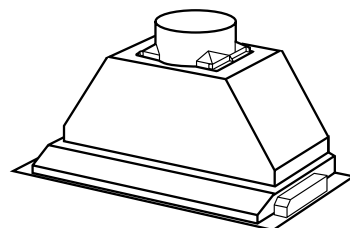


Specially designed to be installed in custom canopy hoods for use over residential commercial-style cooking surfaces.

FEATURES

- Italian design
- Cabinet mount – custom application
- Finish: 430 Stainless Steel
- Widths: 29-13/16", 38-7/16"
- 8" round duct connector/backdraft damper
- Halogen lighting (2 bulbs included on 29-13/16" hood or 4 bulbs on 38-7/16" hood; Type GU10, MR16 shielded, 120 volt, 50 watts max.)
- Slide controls: on-off, 3-speed
- Quiet, dual centrifugal blowers with two high-efficiency motors produce 1000 CFM
- Easily accessible, dishwasher-safe aluminum/stainless steel filters
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected

OPTIONS

- Stainless liner (Model Nos. L2936, L2942, L3848, L3854, L3860)
- Ambient light panel (Model Nos. ALP36, ALP42, ALP48, ALP54, ALP60)
- Exterior blower version (PKEX22) available, providing 600, 900, 1200, or 1500 CFM exhaust

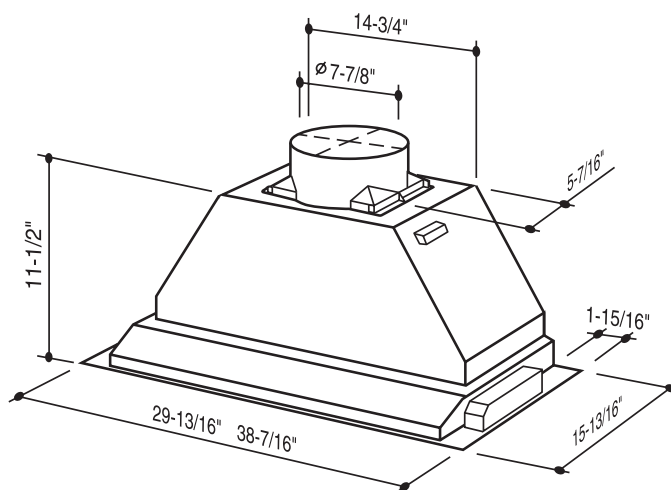

Mount range hood so bottom of hood is 24" to 30" above cooking surface.

SPECIFICATIONS

VOLTS	AMPS	CFM	SONES	DUCT
120	6.23/7.06	1000	10.5	8" round



BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711
BEST Mississauga, Ontario www.BestRangeHoods.com 877-896-1119



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date

PK22 MOUNTING

