

# JENN-AIR® Side by Side Built-In Refrigerator

## PRODUCT MODEL NUMBERS

JS42NXFXDW  
JS48NXFXDW

**Electrical:** A 115 Volt, 60 Hz., AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


**Water Supply:** A cold water supply with water pressure of between 30 and 120 psi (207 - 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 - 414 kPa).

The water shutoff should be located in the base cabinet on either side of the refrigerator or some other easily accessible area. If the water shutoff valve is not in the cabinets, the plumbing for the water line can come through the floor.

**Location:** It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source.

## CABINET OPENING DIMENSIONS

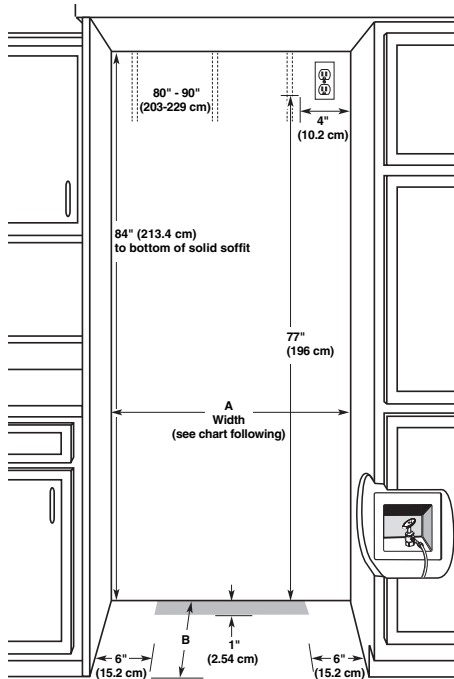

Model	Width A (as shown above)
42	42" (106.7 cm)
48	48" (121.9 cm)


Installation Type	Depth B (as shown above)
Standard Flush (new installation)	25" (63.5 cm) minimum
Retrofit Installations	24" (60.9 cm) minimum

### IMPORTANT:

- Flooring under refrigerator must be at same level as the room. Face of cabinetry must be plumb.
- The width of the opening (Width A), must be as specified for your model, for at least 2" (5.08 cm) back from the face of the cabinet. If your opening does not meet this requirement, you will need to make modifications.


## OVERALL DIMENSIONS

### FRONT VIEW

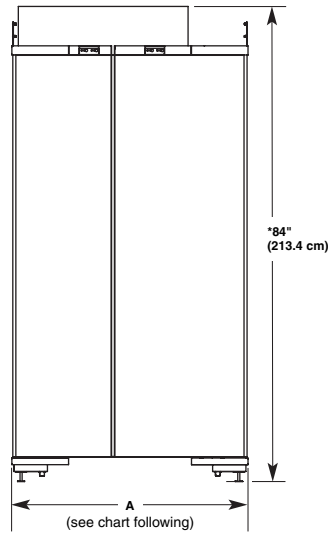

Model	Width A (hinge edge to hinge edge)
42	41¾" (106 cm)
48	47¾" (121.3 cm)

### TOP VIEW

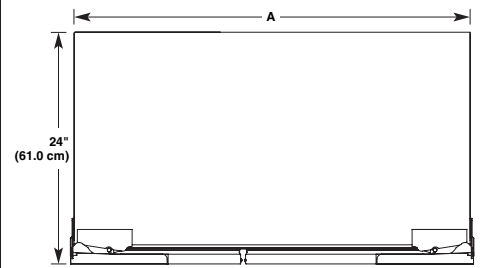


Model	A
42	41¾" (106 cm)
48	47¾" (121.3 cm)

- The power cord is 84" (213 cm) long.
- The water supply line is located at the front of the refrigerator.
- Width dimensions were measured from hinge to hinge.
- The depth from the front face of the doors to the back of the refrigerator cabinet is 24" (60.96 cm) without panels.
- The required thickness for all custom overlay panels is ¾" (1.91 cm).

## DOOR SWING DIMENSIONS

The location must permit both doors to open to a minimum of 90°. Allow 4½" (11.4 cm) minimum space between the side of the refrigerator and a corner wall.

**NOTE:** More clearance may be required if you are using overlay panels, custom handles, or extended handles.

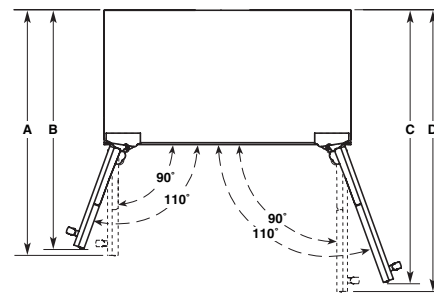

Model	A	B	C	D
42	40¾" (103.5 cm)	39¾" (101.0 cm)	45¾" (115.3 cm)	46¾" (118.8 cm)
48	43¾" (109.9 cm)	42" (106.7 cm)	48¾" (123.5 cm)	50¼" (127.6 cm)