


# Site Preparation Specification Sheet

## Model 3520 Legacy 30" Gas / Electric Convection Self Clean Range

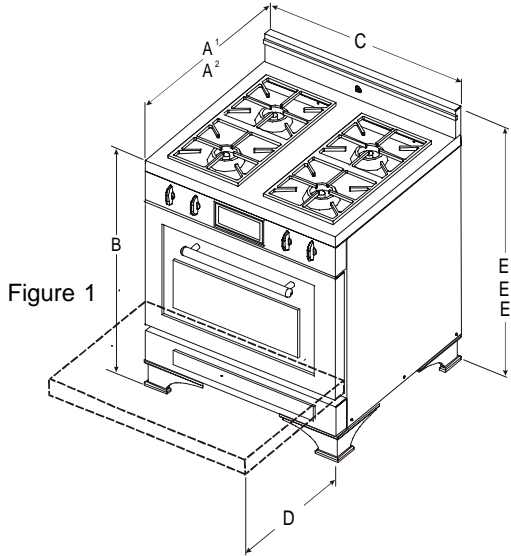

Dim	30" Legacy
A <sup>1</sup>	28 3/4" (73cm) to front of stove
A <sup>2</sup>	31 1/2" (80cm) to edge of oven door handle
B	36 1/8" (92cm)
C	29 3/4" (76cm)
D	17 1/2" (45cm)
E <sup>1</sup>	standard 42 1/8" (106cm) (as shown in figure 1)
E <sup>2</sup>	low profile: 38" (97cm)
E <sup>3</sup>	high back w/shelf: 56 1/8" (143cm)

Note: See "Backguard Options" page 12 for details

Table 1

### Clearances

- Minimum distance between the range and a side wall above the cooking top surface is 6" (see dim "O" in Table 2 below)

### Electrical Requirements:

- Electrical hookup must be performed by a licenced electrician
- 240 Volts 60Hz 4.1Kw, three prong plug for U.S. and four prong for Canadian installations. (5 ft - 1.5 m power cord included)
- New installations for the U.S. may require a four prong plug. Please confirm prior to ordering.
- Stove must be electrically grounded in compliance with local codes. In the absence of local codes, with the National Electrical code ANSI/NFPA 70 "Latest Edition" in the US or in Canada with the Canadian Electrical Code, Part I, CSA Standard C22, or the Local National Electrical Code.

### Gas Requirements:


- Gas hook-up must be performed by a licensed gas fitter.
- Pressure requirements: Natural gas: 6" W.C. (min); LP gas: 11" W.C. (min)
- Connection: 1/2" NPT • 5/8" minimum diameter flex line.
- An accessible manual shut off valve must be installed at the appliance.
- Natural Gas/Propane Conversion kits are available
  - must be performed by a licensed gas fitter

**Note: Appliances installed in the state of Massachusetts**

- This appliance can only be installed in the state of Massachusetts by a Massachusetts licensed plumber or gas fitter
- This appliance must be installed with a three (3) foot / 36 inch long flexible gas connector
- A "T" handle type manual gas valve must be installed in the gas supply line to this appliance

**Anti Tip Bracket:** bracket included with every stove. When properly installed, will prevent stove from tipping forward if downward force is applied to an open door.

For proper performance a 450 CFM vent hood is **recommended** on all 30" Legacy ranges to ensure adequate and proper ventilation. A minimum 400CFM vent hood is required for adequate ventilation. For superior ventilation we recommend using a 36" hood.

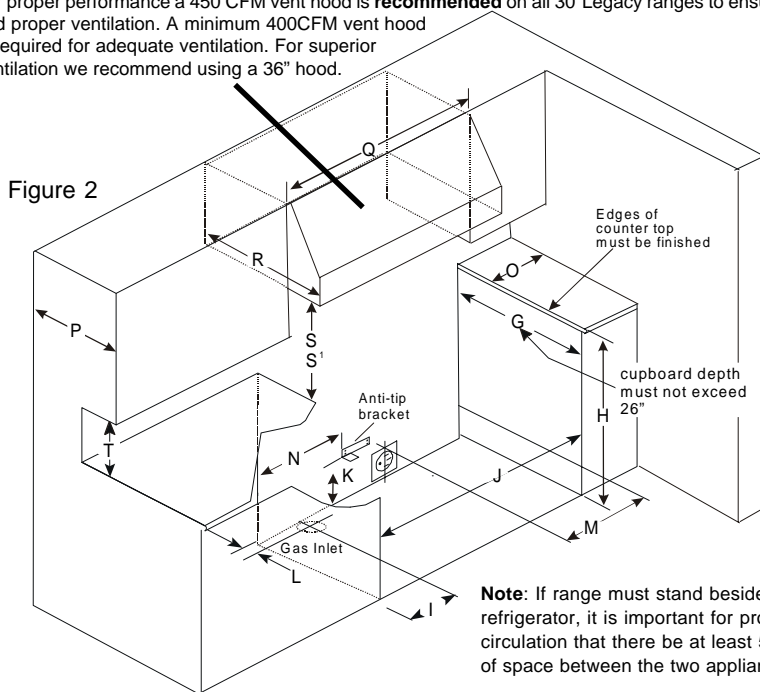

Dim	30" Legacy
G	Maximum 26" (66cm)
H	36" (92.5cm)
I	10" (25cm)
J	30 3/4" (78cm) CDN ONLY 30 1/4 US ONLY
K	5 5/8" (14.5cm) <b>Note:</b> if height of stove (dimension B, Table 1) is increased, this dimension (K), must be increased by same amount to ensure anti-tip bracket is properly located
L	2" (5cm)
M	15" (38cm)
N	10" (51cm)
O	6" (15cm) min left and right side
P	13" (33cm)
Q	SPECIFY WIDTH OF HOOD
R	24" (61 cm)
S	30" min to 36" max (76-92cm)
S <sup>1</sup>	For low profile backguard only 30" min to 32" (76-82cm) max recommended when using Heartland's splashback kit (see page 14 for more details)
T	18" (46cm)

Table 2