# Built-In All Refrigerator

E32AR75JPS professional series



#### Built-In Side-by-Side Configuration



Shown with companion, All-Freezer model E32AF75JPS and optional Double Louvered Trim Kit (TRIMKITSS2), using a 79"

Shown with optional Single Louvered Trim Kit (TRIMKITSS1), using a 79" cutout installation.



# Custom-Fit™ Capacity

More space inside to store whatever you need including large platters.



## Custom-Design™ **Organization System**

The ultimate organization system features Smooth-Glide® drawers with removable/ adjustable dividers and two mini baskets and Perfect Bins™ Door Storage.



## Smooth-Glide™ Crisper Drawers

Crisper Drawers smoothly glide out and keep even the most delicate fruits and vegetables fresh with adjustable humidity control and minimal temperature variation.



## **Theatre Lighting**

Our ramp-up designer LED lighting is as beautiful as it is functional, keeping the contents clearly visible.

CAPACITIES	
Volume	18.6 Cu. Ft.
Shelf Area	22.38 Cu.Ft.
EXTERIOR	
Professional Door and Handle Design	Yes
Custom-Set™ Electronic Controls	Yes
Hidden Door Hinge Covers	Yes
Air Filter Indicator	Yes
Electronic Control Lock	Yes
INTERIOR CONVENIENCES	
PureAdvantage® Air Filter	Yes
Custom-Design™ Glass Shelves	3
Smooth-Glide™ Full-Extension Crispers/Fresh Zone	1
Smooth-Glide Full-Extension Crispers/Fresh Zone Smooth-Glide™ Full-Extension Deli Drawer/Cool Zone	1
3-Position Adjustable Crisper Dividers	2
Removable Basket Trays	2
Adjustable Dairy Door Bin	1
Full-Width 1-Gallon Storage with Tall Bottle Retainer	1
Clear Half-Width 1-Liter Adjustable Door Bins	3
Perfect Bins™ Door Storage	1
Full-Width Condiment Shelf	1
Theatre Lighting	Yes
Custom-Set™ Digital Temperature Control System	Yes
Temp Alarm System/Door Ajar Alarm/Power Failure Alarm	Yes
Door Closer	Yes
Luxury-Quiet™ Design	Yes
•	100
ADDITIONAL FEATURES	
ENERGY STAR®	Yes
Sabbath Mode (Star-K® Certified)	Yes
ACCESSORIES	
Single Louvered Trim Kit – PN# TRIMKITSS1	Optional
Double Louvered Trim Kit – PN# TRIMKITSS2	Optional
PureAdvantage® Air Filter Replacement Cartridge – PN# EAFCBF	Optional
SPECIFICATIONS	
Product Dimensions –	
Height (Cabinet) (Including Door)	70-5/8" 71-3/8"
Width	32"
Depth (Including Door) (with 90° Door Open)	26-1/2" 57-1/4"
Power Supply Connection Location	Right Bottom Real
Voltage Rating	120V/60Hz/20A
Connected Load (kW Rating) @ 115 Volts <sup>‡</sup>	0.55
Minimum Circuit Required (Amps)	20
Shipping Weight (Approx.)	240 Lbs.
‡ An electrical supply with grounded three-prong receptacle is r supply circuit must be installed in accordance with current edi Code (NFPA 70) and local codes & ordinances.	equired. The power tion of National Electrica

## **Optional Trim Kits**


# Single Louvered Trim Kit (TRIMKITSS1)

For single All-Freezer or All-Refrigerator installation. Includes louvered top grille and vented, louvered toe kick, 2-9/16"  ${\rm H}$ leveling system and side/top trim pieces. (Kit can be adapted to fit either 75" or 79" opening height.1)

# Double Louvered Trim Kit (TRIMKITSS2)

For All-Freezer/All-Refrigerator side-by-side installation. Includes full-width, louvered top grille and vented, louvered toe kick, two 2-9/16" H leveling systems, side/top trim pieces and hardware to secure side-by-side units together. (Kit can be adapted to fit either 75" or 79" opening height.1)

E32AR75JPS professional series

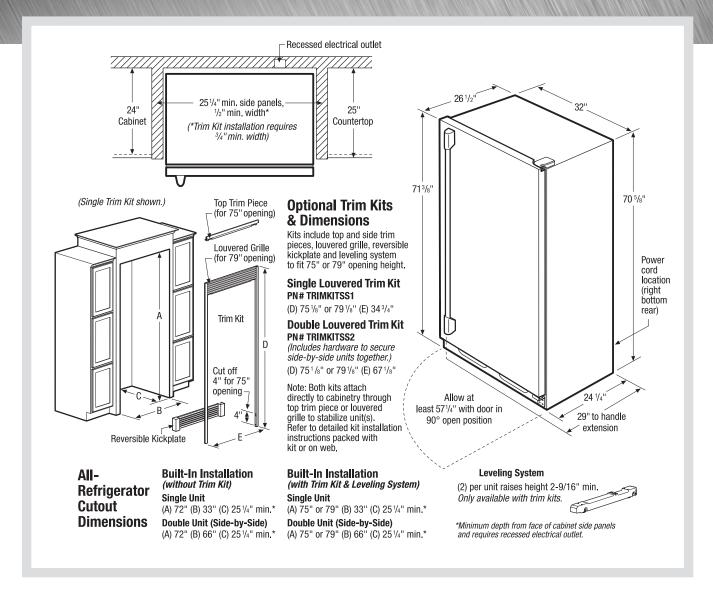

## 32" Built-In All-Refrigerator Specifications

- Product Weight 230 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of *National Electrical Code (NFPA 70)* and local codes & ordinances.
- Voltage Rating 120V/60 Hz/20 Amps
- Connected Load (kW Rating) @ 115 Volts = 0.55kW
- Amps @115 Volts = 5 Amps
- Always consult local and national electric codes.
- Minimum 25-1/4" depth requires recessed electrical outlet.
- To allow for ease of installation, tape excess power cord to back of unit.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete drawer/crisper access and removal. (Absolute 4" minimum clearance will ONLY allow for 90° door swing which will provide limited drawer/crisper access with restricted removal.)
- Refrigerator must be placed on level surface of hard material, same height as flooring. Surface must support approximately 800 lbs. when fully loaded. Unit equipped with 4-point leveling.

## "Built-In Look" Specifications

- Minimum opening of 72"H x 33"W x 25-1/4"D required for single-unit "Built-In Look" installation; 66" W required for double-unit installation. (72"H to be measured from finished floor to underside of soffit or overhead cabinet.)
- Remove all wall/floor molding prior to built-in installation.

#### **Optional Trim Kit Specifications**

- If optional Single or Double Louvered Trim Kit is to be used, different cutout dimensions are required. Kits can be adapted to fit either 75" or 79" opening height. (Refer to cutout dimensions on this page and detailed Louvered Trim Kit installation instructions included with kit or on web.)
- Remove all wall/floor molding prior to built-in installation.

Note: For planning purposes only, Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions.

#### Optional Accessories

- Single Louvered Trim Kit (PN# TRIMKITSS1).
- Double Louvered Trim Kit (PN# TRIMKITSS2).
- PureAdvantage® Air Filter Replacement Cartridge - (PN# EAFCBF).



© 2010 Flectrolux Home Products Inc.

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.