



SPIRE™

FLOOR STANDING STEREO/HOME THEATER FRONT/SURROUND

**ESL
SERIES**

25 YEARS OF PASSION, PRIDE AND PERFORMANCE

Revealing every subtle nuance of recorded sound with unflinching accuracy, Spire's ultra rigid AirFrame™ and curvilinear XStat™ electrostatic transducer reveal a magical performance with precision, dynamics and three-dimensional sound staging. Spire's PoweredForce™ active woofer system enables fine-tuning of the speaker's output in the frequency ranges most commonly and severely affected by room acoustics. The result is an extremely detailed hybrid electrostatic loudspeaker with bass that is not just deep and powerful, but also smooth, clean, and detailed.

Frequency Response	29–23,000 Hz ± 3dB
Sensitivity	91 dB/2.83 volts/meter
Impedance	4 Ohms/0.8 @ 20kHz
Crossover Frequency	320 Hz
High/Mid Frequency Driver	44" (112cm) CLS™ XStat™ electrostatic
Low Frequency Driver	10" (25.4cm) 200 watt PoweredForce™ aluminum cone
Power Handling	250 watts per channel
Weight	58 lbs. (26.3kg) per channel
Dimensions (HxWxD)	59" x 12.5" x 17.75" (150 x 32 x 45.1cm)



The Great American Speaker Company
www.martinlogan.com

Application:


Stereo speaker or home theater front/surround ideal for large and medium rooms.

Precision crossover engineering derived from the CLX loudspeaker perfectly blends high-resolution XStat™ and PoweredForce™ drivers providing an unparalleled sonic experience.

Key Features:

- CLS™ XStat™ electrostatic transducer
- Ultra rigid AirFrame™
- 200 watt PoweredForce™ 10-inch aluminum cone woofer
- Precision built advanced topology Vojtko™ crossover
- 35Hz level control
- Custom ETC™ spikes

FINISH OPTIONS

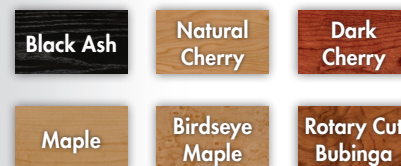

Visit configurator.martinlogan.com to explore the full range of finish options.



©2009 MartinLogan, Ltd. All rights reserved.