



DESCENT™ i

STEREO/HOME THEATER SUBWOOFER

ESL
SERIES

ULTIMATE LOW-FREQUENCY PERFORMANCE

The Descent i incorporates features and enhancements that simplify system integration while improving performance. Its signature three-driver, force-canceling configuration virtually eliminates bass-blurring cabinet resonance. Each rugged, custom-built aluminum-cone driver is servo-locked to its own sophisticated, high-power amplifier. We've outfitted Descent i with easily accessible top-mounted controls and LFE and two-channel inputs that allow separate optimization for home-theater and stereo operation in the same system. Descent i is a no-compromise subwoofer, regardless of application.

<i>Frequency Response</i>	18–120 Hz ± 3dB
<i>Low Pass Filter Frequencies</i>	30, 35, 45, 55, 65, 80Hz, CLX (optional)
<i>High Pass Filter Frequencies</i>	40, 70Hz, Bypass
<i>25 and 50Hz Level Controls</i>	±10dB
<i>Low Frequency Drivers</i>	Three 10" (25.4) aluminum cone
<i>Amplifier</i>	Three 250W (700W peak)
<i>Inputs</i>	Left/Right RCA Line Level, RCA and XLR LFE, Speaker Level
<i>Outputs</i>	RCA Sub Out, RCA Right/Left
<i>Weight</i>	105 lbs. (47.7kg)
<i>Dimensions (HxWxD)</i>	21.4" x 20.5" x 19.9" (54.4 x 51.9 x 50.5cm)



The Loudspeaker Technology Company
www.martinlogan.com

Application:


Home theater and stereo subwoofer ideal for large rooms.

Precision system engineering delivers dynamic output to the lowest frequencies with clarity and definition akin to that of electrostatic transducers.

Key Features:

- Advanced Triple Servo Control
- BalancedForce™ driver alignment
- Three ultra efficient 250-watt (700 watt peak) amplifiers
- 3 low-distortion 10-inch aluminum cone woofers
- Top mounted controls
- 25 and 50Hz level controls
- Unique crossover and level settings for simultaneous 2-channel and LFE connections
- Custom ETC™ spikes

FINISH OPTIONS

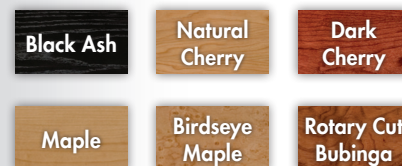

Visit configurator.martinlogan.com to explore the full range of finish options.

