



Key Features

- 5.1 Channel Micro Satellite Speaker System
- Gloss Finish on Satellite Speakers
- 135 Watt Amplified Subwoofer (6 ohms, 20-200 Hz, 0.8% THD)
- Subwoofer Includes RCA Input and High Level Inputs (Speaker Inputs)
- Nano-Fine® Balanced Dome Tweeter Rated to 50 kHz
- Dual 2¼" Drivers with 1" Voice Coils
- 120 Watt Maximum Power Handling (Front, Center, Surround)

Additional Features

General Features

- Complete Speaker System for Use with Multi-Channel A/V Receivers
- Five Matching Front, Surround, and Center Speakers
- Gloss Finish on Satellite Speakers
- Nano-Fine® Balanced Dome Tweeter Rated to 50 kHz
- Dual 2¼" Full-Range Drivers with 1" Voice Coils
- Advanced SAW Bass Reflex Subwoofer Design
- Subwoofer Includes RCA Input and High Level Inputs (Speaker Inputs)

Audio Features

- 120W Maximum Power Handling (Front, Center, Surround)
- 8 ohm Speaker Impedance
- 135 Watt Amplified Subwoofer (6 ohms 20 -200 Hz, 0.8% THD)
- Level Control (Subwoofer)
- Movie/Music Switch (Subwoofer)


Inputs

- Subwoofer Input: 1 RCA and High Level (Speaker Connection)

Convenience Features

- Magnetically Shielded
- Auto Power On/Off (Subwoofer)
- Supplied Audio (RCA) and Speaker Cables
- Includes Pedestal Stand for Center Channel Speaker
- Can Add Additional Satellite Speakers for 6.1/7.1 Model # SS-V441H
- Accepts Optional WS-FV10D Floor Stands and Optional WS-WV10D Wall Mounts

Key Technology

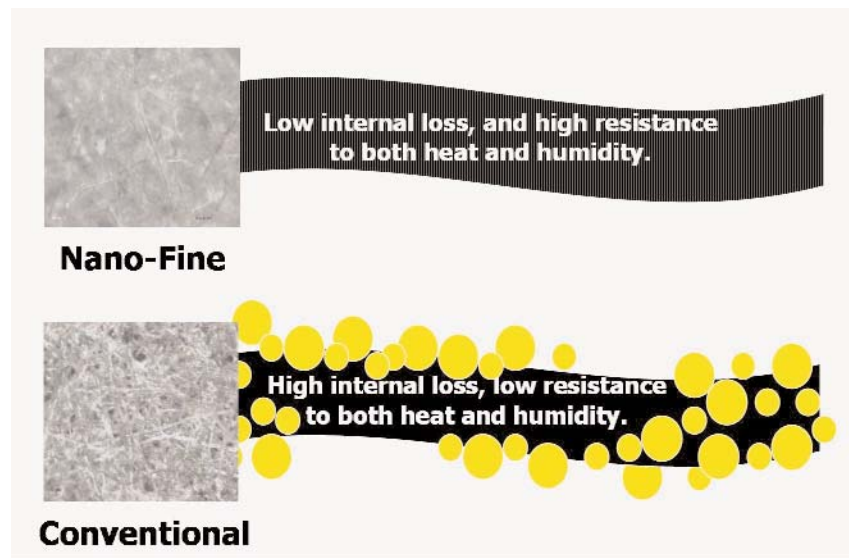

Nano-Fine vs. Conventional

Specifications

Specifications

- Frequency Response: 26 - 50,000 Hz
- Power Handling (Front/Rear Speakers): 120 Watts Maximum
- Power Handling (Center Speaker): 120 Watts Maximum
- Sensitivity Front/Rear Speakers (dB/W/m): 84 dB
- Sensitivity Center Speaker (dB/W/m): 84 dB
- System Impedance: 8 ohms
- Subwoofer Input x 1 RCA and High Level (Speaker Connection)
- Front/Center/Rear Speaker Type: 2 Way Bass Reflex Design
- Front/Rear Woofer(s): Dual 2¼" Woofers

- Voice Coil Diameter Front/Rear/Center: 1"
- Front/Center/Rear Tweeter: 1" Nano-Fine Balanced Dome
- Amplified Subwoofer: 135 Watt Amplified Subwoofer (6 ohms, 20 - 200 Hz, 0.8% THD)
- Subwoofer Type: Active, Bass Reflex Design
- Subwoofer Woofer: 8"
- Voice Coil Diameter Subwoofer: 2"

General

Subheading

- Power Requirements: 120V AC, 60 Hz
- Power Consumption: 90W

Accessories

Supplied Accessories

- Instruction Manual
- Center Speaker Stand
- Speaker Cable: 3.5M x 3 (11.4' x 3); 10M x 2 (32.8' x 2); 2.5M x 2 (6.5' x 2)
- RCA Type Cable: 2M (6.5')

Optional Accessories

- WS-FV10D (Floor Speaker Stand)
- WS-WV10D (Wall Mount)
- SS-V441H (Additional Satellite Speaker for 6.1/7.1)

Weights & Measures

Front/Center/Rear Speaker

- Approx. Dimensions (w/h/d): 3.5" x 6.7" x 4.6" (90 x 172 x 118mm)
- Approx. Weight: 2.8 lbs. (1300g)

Subwoofer

- Approx. Dimensions (w/h/d): 9" x 15.4" x 18.2" (230 x 392 x 464mm)
- Approx. Weight: 29 lbs. (13.2 kg)

UPC Code

- 027242622159