




30" Freestanding Electric Range

PRODUCT MODEL NUMBERS

GR440LXM	RF302B XK	RF364PXM
GR445LXM	RF303P XK	RF364PXP
GR448LXP	RF314PXM	RF365PXM
GR458LXM	RF315PXM	RF366LXP
GR470LXM	RF315PXM	RF367LXM
GR475LXM	RF340B XK	RF368LXM
GR478LXP	RF341B XK	RF368LXP
RF196LXM	RF352B XK	RF369LXP
RF196LXP	RF361P XK	RF378LXM
RF198LXM	RF362B XK	RF379LXM
RF3020XK	RF364LXM	RF380LXM

Electrical: This range can be direct wired to a four-wire or three-wire, 8 gauge copper or 6 gauge aluminum wire wiring system or a range power supply cord can be used. A four-wire or three-wire, single-phase, 120/240-volt, 60 Hz, AC-only, electrical supply is required on a 40 amp circuit, (or, if specified on the model/serial rating plate, a four-wire or three-wire, single-phase 120/208-volt, 60 Hz, AC-only electrical supply is available, a 40 amp circuit), fused on both sides of the line. A time-delay fuse or circuit breaker is recommended. The model/serial rating plate is located on the oven frame behind the storage drawer panel.


OVERALL DIMENSIONS

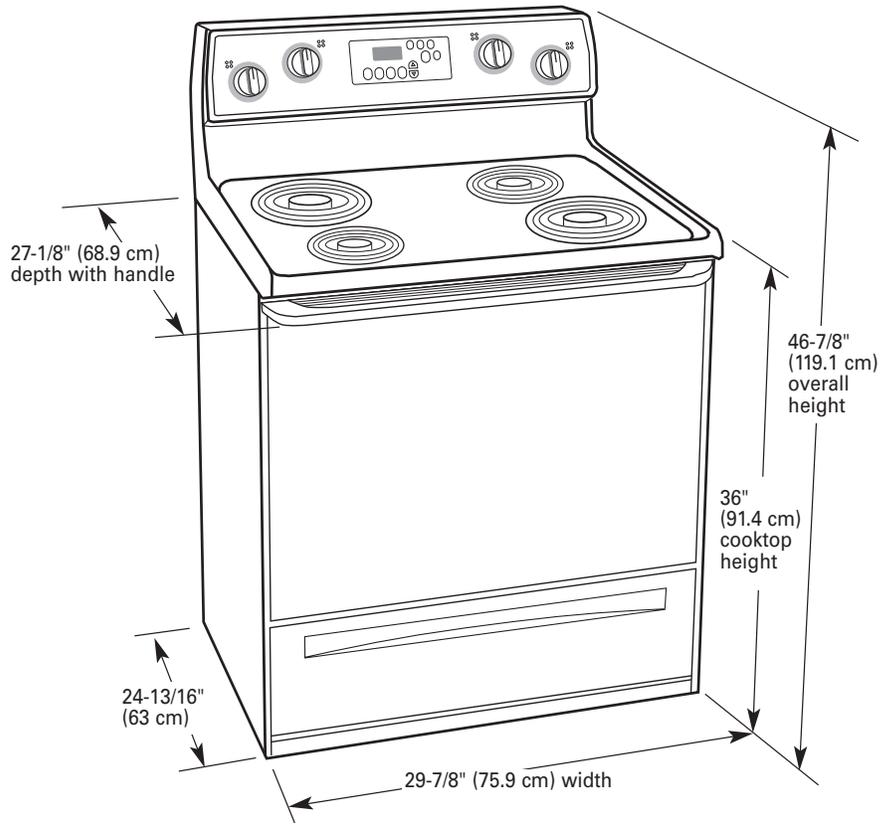

CABINET OPENING DIMENSIONS

Cabinet opening dimensions shown are for:

- 25" (63.5 cm) countertop depth,
- 24" (61 cm) base cabinet depth,
- 36" (91.4 cm) countertop height

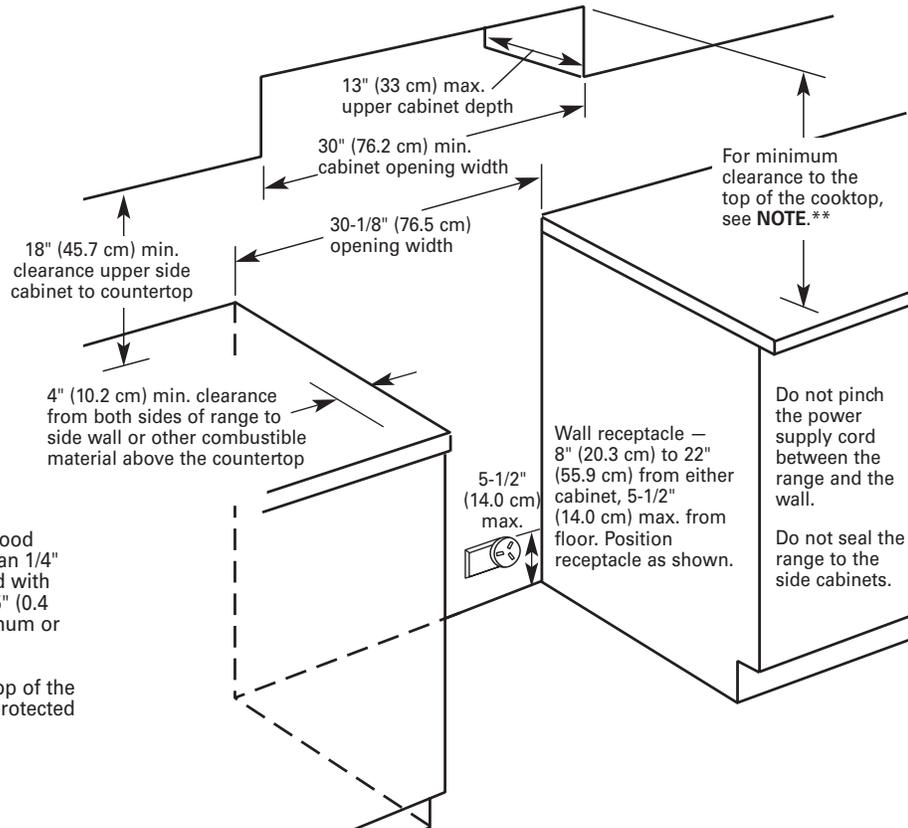

***NOTE:** 24" (61 cm) min. when bottom of wood or metal cabinet is protected by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.