

*Style.*

*A visual expression  
of passion and  
influences.*

**best**  
BY BROAN



# Style.

*A visual expression  
of passion and  
influences.*



*From the balance and symmetry of sculpted marble, to the rich, warm tones of Tuscan Red and Naples Yellow, Italian style has influenced designers and seduced decorators with its unique aesthetic. Best® by Broan has incorporated a passion for design into each of our unique and beautiful products — uniting uncompromising function with superior style.*

## Island Hoods

IS102 .....	7
IS502 .....	8
IS241/BER02IS....	9
IS170 .....	10
ISER222.....	11
IS42 .....	12
IS23 .....	13



## Chimney Hoods

K7788 .....	17
K8087 .....	18
K7388 .....	19
K3500 .....	20
K15 .....	21
K273 .....	22
K3139 .....	23
K29 .....	24
K30 .....	25
KER222.....	26
K42 .....	27
K41 .....	28
K34 .....	29



## Professional Style

K260A .....	33
K260D .....	34
K210A .....	35



## Built-in Collection

PIK Pro-Style	
Insert .....	39
PK22 .....	40
P195 .....	41
U102 .....	42
DD01 .....	43



## Accessories

Backsplashes .....	44
Flue Extensions ..	44
Liners.....	45
Blowers .....	46
Charcoal Filters ..	47
Recirc. Flues.....	47
Duct Accessories..	47


Specifications...	48-50
-------------------	-------





*The gathering place.*

*Where enduring relationships  
come together.*

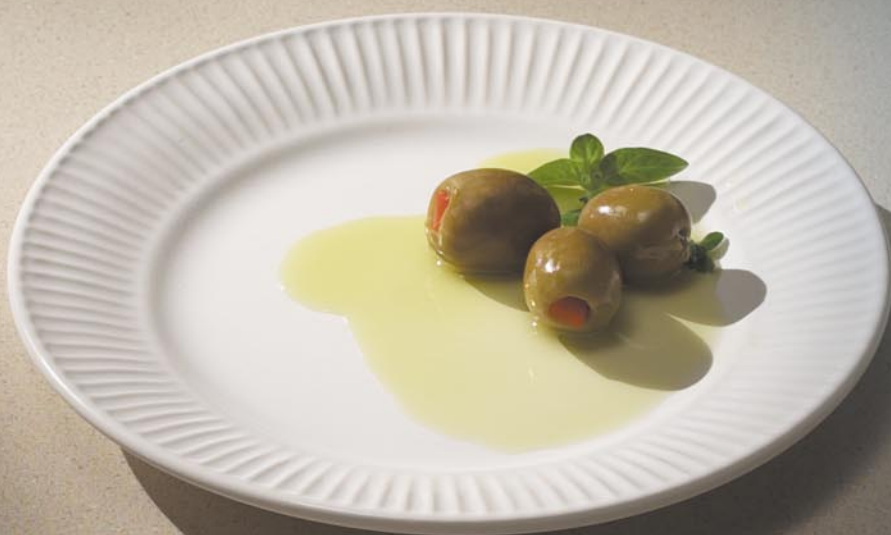

*Close friends have long recognized the joy of a good conversation.  
Add fine food and the perfect wine and you have a recipe for  
relationships that last a lifetime. You can trust that a Best®  
range hood will be there for generations—quietly and beautifully  
adding to the moment.*



## ISLAND HOODS

Every room needs an element that defines the space while complementing everything around it. It may be a striking centerpiece that commands attention, or an unassuming object poised for function. Best® island hoods serve these needs beautifully. High style or high function, there's a Best® range hood that will define your kitchen.





## ISLAND HOODS

At times the most simple designs are the most inspirational. This is the kind of range hood that inspires many to say, "Now that's perfect."

### IS102

Graceful, hand-rolled surfaces in brushed stainless, or two durable powder coated finishes

Stylish, integral utensil rail

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Quick release stainless steel/aluminum mesh filters are dishwasher safe

Brilliant halogen lighting system

Multi-speed slide control

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Telescopic flue for 8' to 9' ceilings, custom extensions available (see p. 44)



Slide control permits precise speed selection and remembers the last setting.



Four halogen lamps distribute light evenly across the work surface.

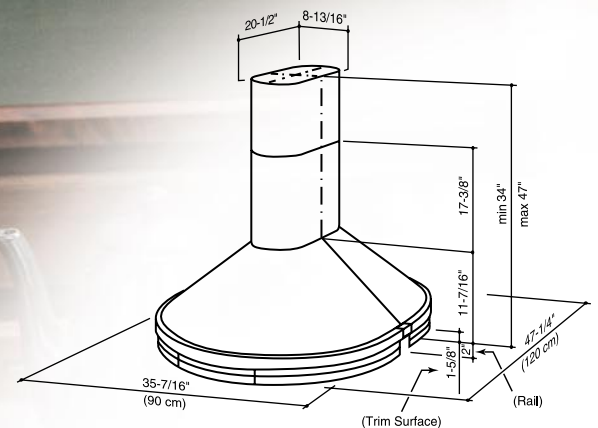

For installation guidelines and product details see pages 48 – 50.

Model	Dimensions	Blower	CFM	Finish
IS102	47-1/4" width 35-7/16" depth	INT. ■	1000	304 Brushed Stainless, Black, White
IEX102	47-1/4" width 35-7/16" depth	EXT. ♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless

■ Blower included.

♦ Blower purchased separately.



## ISLAND HOODS

### IS502

A stunning combination of glass and stainless steel

Quiet, efficient internal blower with HVI certified performance (see p. 46)

Stainless steel/aluminum mesh filter is dishwasher safe

Brilliant halogen lighting with high and low settings

Four speed, electronic push-button control

10 minute time-delay shut-off feature and reminder light for filter maintenance


Heat Sentry™ detects excessive heat and adjusts speed to high automatically

Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Two 20-watt halogen lamps illuminate the cooking surface beautifully.

Is it sculpture? Is it art? Is it really a range hood? The simple answer is 'yes' to all of the above. One thing is certain — it will be admired.

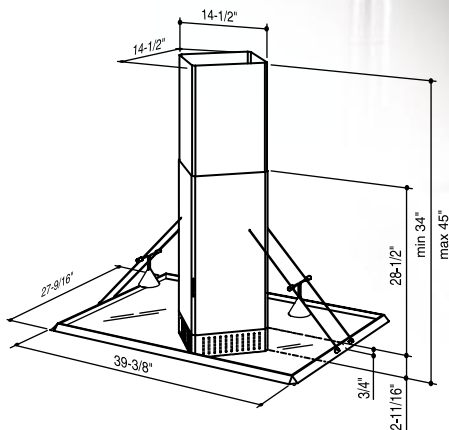

Model	Dimensions	Blower	CFM	Finish
IS502	39-3/8" width 27-9/16" depth	INT. ■	450	304 Brushed Stainless

■ Blower included.

For installation guidelines and product details see pages 48 – 50.



Who says a range hood has to be metal, or angular for that matter. Perhaps it should simply complement the soft, flowing lines that define your home.

## IS241/BER02IS

Distinctive circular, hand-blown glass visor

Three beautiful metal finishes, and two durable powder coated colors

Quiet, efficient internal blower with HVI certified performance (see p. 46)

Stainless steel/aluminum mesh filter is dishwasher safe

Brilliant halogen lighting system

Electronic controls include a 10 minute time-delay shut-off feature and reminder light for filter maintenance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Two 20-watt halogen lamps accent the circular motif on all elements of the hood design.



Elegant electronic control provides four-speed push-button convenience.

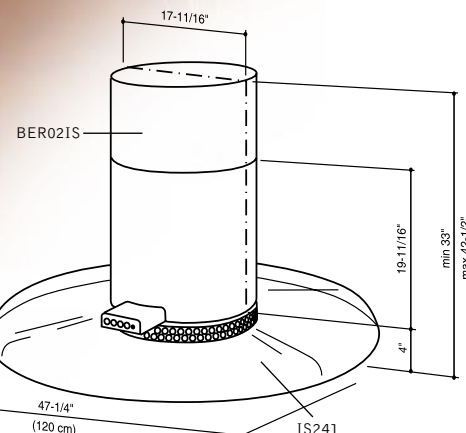

Model	Dimensions	Blower	CFM	Finish
IS241	47-1/4" Dia	–	–	Glass Visor (only)
BER02IS	17-11/16"	INT. ■	500	304 Brushed Stainless, Black, White, Polished Brass, Brushed Copper

■ Blower included.

For installation guidelines and product details see pages 48 – 50.

## ISLAND HOODS

### IS170

Slim-line, multi-faceted design in beautiful brushed stainless, or two durable powder coated colors

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Quick release stainless steel/aluminum mesh filters are dishwasher safe

Four brilliant halogen lamps with two-level lighting

Elegant four speed push-button electronic control

10 minute time-delay shut-off feature and reminder light for filter maintenance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Ducted/non-ducted telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Halogen lighting provides brilliant working illumination and a low-level setting.



Optional glass shelf (GSIS170) makes a sparkling statement.

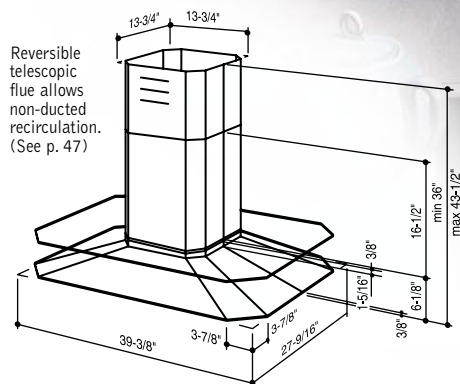

For installation guidelines and product details see pages 48 – 50.

Model	Dimensions	Blower	CFM	Finish
IS170	39-3/8" width 27-9/16" depth	INT. ■	450	304 Brushed Stainless, Black, White
IEX170	39-3/8" width 27-9/16" depth	EXT. ♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless

■ Blower included. ♦ Blower purchased separately.



Professional capability blended with contemporary accents make this range hood as pleasing to admire as it is to use.



## ISER222

Elegant canopy design is accented with a tubular, polished utensil rail

Three beautiful metal finishes, and two durable powder coated colors

Powerful yet quiet, internal and external blowers with HVI certified performance (see p. 46)

Quick-release, stainless steel/aluminum mesh filters are dishwasher safe

Four brilliant halogen lamps with two-level lighting

Electronic controls include a 10 minute time-delay shut-off feature and a reminder light for filter maintenance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



The wrap-around utensil rail is a stylish and functional detail. A chrome utensil rail comes with the stainless steel finish. A polished brass utensil rail comes with all other finishes.



Four blower speed levels are accessible with advanced touch control.

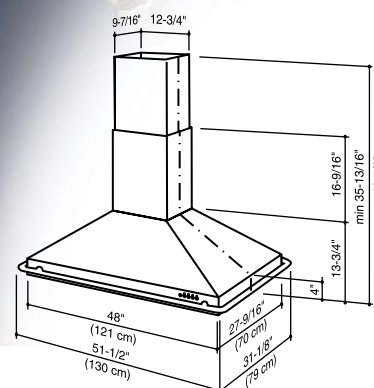

Model	Dimensions	Blower	CFM	Finish
ISER222	51-1/2" width 31-1/8" depth	INT. ■	1000	304 Brushed Stainless, Black, White, Polished Brass, Brushed Copper
IEX222	51-1/2" width 31-1/8" depth (see page 46)	EXT. ♦	600, 900, 1200, 1500	304 Brushed Stainless

■ Blower included. ♦ Blower purchased separately.

For installation guidelines and product details see pages 48 – 50.

## IS42

Classic style in three attractive metal finishes, and two durable powder coated colors

Optional trim finishes are available in chrome, brushed stainless, black, white or polished brass

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Four halogen lamps provide brilliant cooktop lighting

Quick-release, stainless steel/aluminum mesh filters are dishwasher-safe


Heat Sentry™ detects excessive heat and adjusts speed to high automatically

Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)


Free-hanging design melds magnificent proportions and distinctive trim to create a bold yet graceful focal point that highlights your unique décor.



Blower is adjusted with a multi-speed slide control.



Add a contrasting trim to complement other design details and accessories in your kitchen.

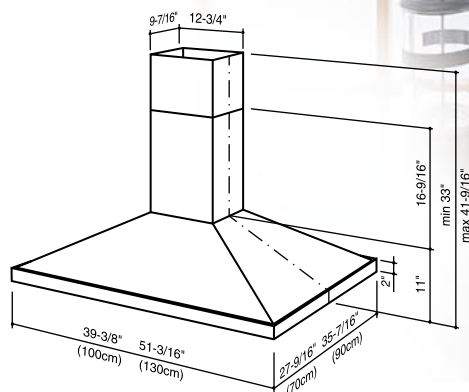

Model	Dimensions	Blower	CFM	Finish
IS42	39-3/8" w x 27-9/16" d 51-3/16" w x 35-7/16" d	INT. ■	1000	304 Brushed Stainless, Black, White, Polished Brass, Brushed Copper
IEX42	39-3/8" w x 27-9/16" d	EXT. ♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless

For installation guidelines and product details see pages 48 – 50.

■ Blower included. ♦ Blower purchased separately.



Combine the sophistication of fine, angular lines with simplified functionality and you have the perfect island range hood where understatement is the statement.

## IS23

Clean, seamless surfaces in brushed stainless, or two durable powder coated finishes

Quiet, efficient internal blower with HVI certified performance (see p. 46)


Quick-release, stainless steel/aluminum mesh filters are dishwasher safe

Dual fluorescent lighting

Stylish push-button control for blower speed and lighting

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Ducted/non-ducted telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Simple push-button controls enable three blower speed settings.



Fluorescent lamps flood the cooking surface with even lighting.

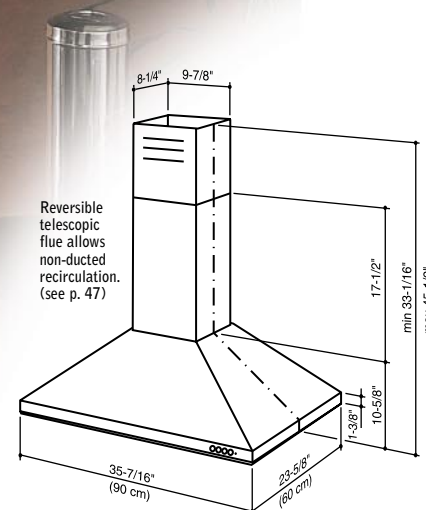

Model	Dimensions	Blower	CFM	Finish
IS23	35-7/16" width 23-5/8" depth	INT. ■	500	430 Brushed Stainless Black, White

■ Blower included.

For installation guidelines and product details see pages 48 – 50.

*The Italian  
design tradition.*





*A celebration of  
engineering, art and desire.*



*Italian artists have forever altered the way the world sees itself.  
From ancient Rome to the Renaissance, their influence is  
unmistakable. Today, Italian designers continue the legacy in  
Best® range hoods, with a rich passion and desire for unmatched  
craftsmanship.*

# CHIMNEY HOODS

**Open up your kitchen and create a stunning focal point. Demonstrate your bold sense of design. Best® chimney hoods can help you achieve any aesthetic you desire, whether it's ultraclean Eurodesign, traditional, or eclectic. Our unique use of materials and form will help you express the style that's uniquely your own.**



You can special order this product with a Cobalt Blue, Garnet Red or Sage Green control panel. Accent the unique look of your kitchen, or add a splash of color.





## CHIMNEY HOODS

This contemporary Eurodesign range hood is dramatically simple, and simply dramatic. And its ability defies its appearance.

### K7788

Sleek design in a beautiful brushed stainless finish

Accented with black glass trim; Cobalt Blue, Garnet Red or Sage Green models available by special order

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Brilliant, dual halogen lighting with two intensity settings

4-speed electronic push-button control


10 minute time-delay shut-off feature and reminder indicator for filter maintenance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically

Ducted/non-ducted telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Stainless steel/aluminum mesh filters are easy to remove and clean effortlessly in the dishwasher.

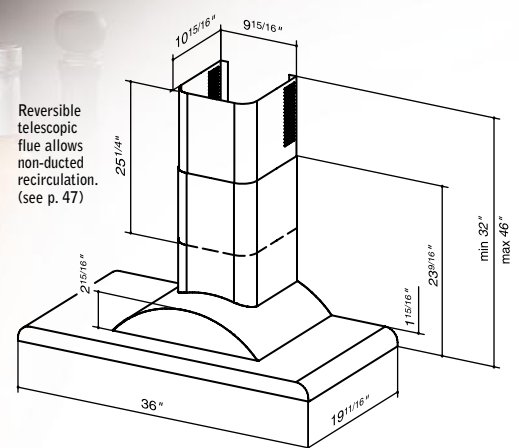

For installation guidelines and product details see pages 48 – 50.

Model	Width	Blower	CFM	Finish
K7788	36"	INT. ■	440	304 Brushed Stainless with Black glass trim*
KEX7788	36"	EXT. ♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless

■ Blower included.

♦ Blower purchased separately.

\*Models with Cobalt Blue, Garnet Red or Sage Green glass trim available by special order

# K8087

Ultra-thin, hand formed  
design, finished in brushed  
stainless

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Brilliant two-level lighting  
from two halogen lamps

Elegant 4-speed push-button electronic control

10 minute time-delay shut-off feature and reminder light for filter maintenance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Ducted/non-ducted telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Translucent touch controls indicate selection.



Quick release stainless steel/  
aluminum filter is dishwasher safe.

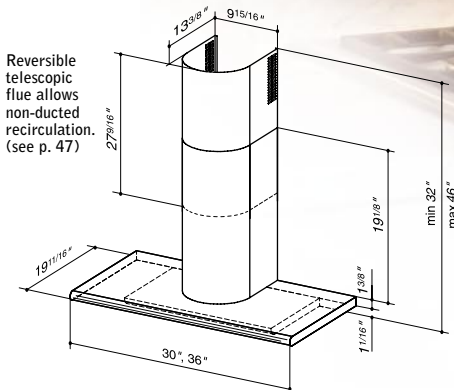

**With flowing lines that appear sculpted from a single block of stainless steel, this strong and graceful hood creates a striking focal point in any kitchen.**

Model	Width	Blower	CFM	Finish
K8087	30", 36"	INT.■	450	304 Brushed Stainless
KEX8087	36"	EXT.◆ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless

■ Blower included. ♦ Blower purchased separately.



A graceful arc and powerful vertical lines melt in a contemporary design that's at home in any setting and with every décor.



## K7388

Airy design merges hand formed glass with brushed stainless

Quiet, efficient internal blower with HVI certified performance (see p. 46)

Quick release stainless steel mesh filters are dishwasher safe

Brilliant, dual halogen lighting system

4-speed electronic push-button control

10 minute time-delay shut-off feature and reminder indicator for filter maintenance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically

Ducted/non-ducted telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)




Touch controls enable four blower speeds; digital speed display.



Two-level lighting: working and low-level settings.

Reversible telescopic flue allows non-ducted recirculation. (see p. 47)

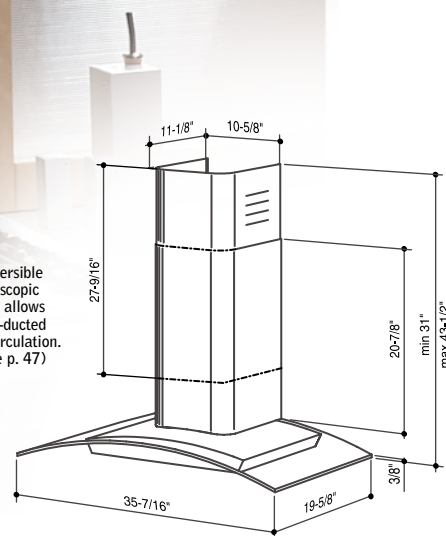

Model	Width	Blower	CFM	Finish
K7388	35-7/16"	INT. ■	450	430 Brushed Stainless

■ Blower included.

For installation guidelines and product details see pages 48 – 50.



## K3500

Stunning Italian design in stainless steel and glass

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Quick-release, dishwasher-safe aluminum mesh filter

Brilliant, dual halogen lighting with two intensity settings

Electronic controls include a 10 minute time-delay shut-off feature and a reminder light for filter maintenance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically

Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)




Electronic four-speed control. LEDs illuminate the selection.



Two powerful halogen lights are directed to the center of the work surface.

A sweeping glass reveal is as beautiful as it is functional – a generous canopy captures the heat without blocking the view.

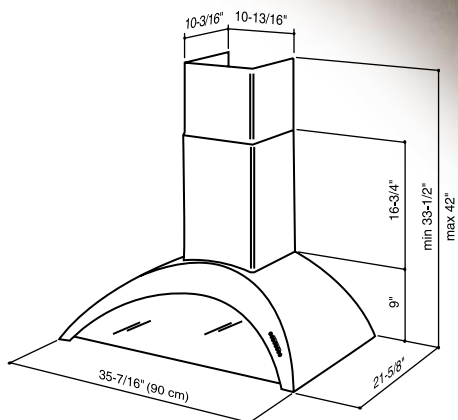

For installation guidelines and product details see pages 48 – 50.

Model	Width	Blower	CFM	Finish
K3500	35-7/16"	INT. ■	450	304 Brushed Stainless
KEX3500	35-7/16"	EXT. ♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless

■ Blower included. ♦ Blower purchased separately.



Seamless in design and organic in form, this range hood rises gracefully with an understated elegance.

## K15

Graceful wall-mounted design in brushed stainless or durable powder coated finishes

Stylish, integral, chrome utensil rail

Quiet, efficient internal blower with HVI certified performance (see p. 46)

Quick release stainless steel/aluminum mesh filters are dishwasher safe

Brilliant dual halogen lighting system

Three-speed slide control

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Dual halogen lamps flood the work surface with brilliant light.



Easy-access slide controls are hidden from view.

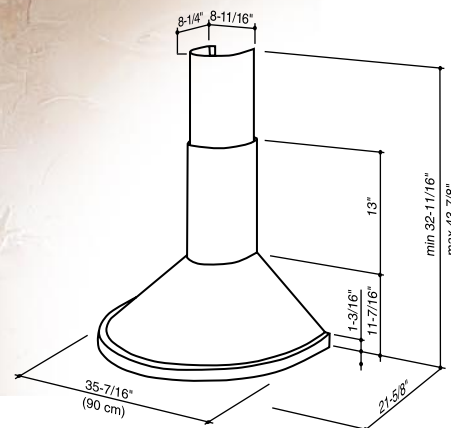

Model	Width	Blower	CFM	Finish
K15	35-7/16"	INT. ■	500	430 Brushed Stainless, Black, White

■ Blower included.

For installation guidelines and product details see pages 48 – 50.

## K273

A mix of curves and angles shape the canopy and chimney

Integral utensil rail adds a distinctive highlight and functional convenience

Choose brushed stainless, or two durable powder coated finishes

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Quick-release, stainless steel/aluminum mesh filters are dishwasher safe

Bright halogen lighting with two intensity settings


Electronic controls include a 10 minute time-delay shut-off feature and a reminder light for filter maintenance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Two halogen lights flood the cooktop with brilliant light.



Hidden from view but easy to access, electronic control provides four speed settings.

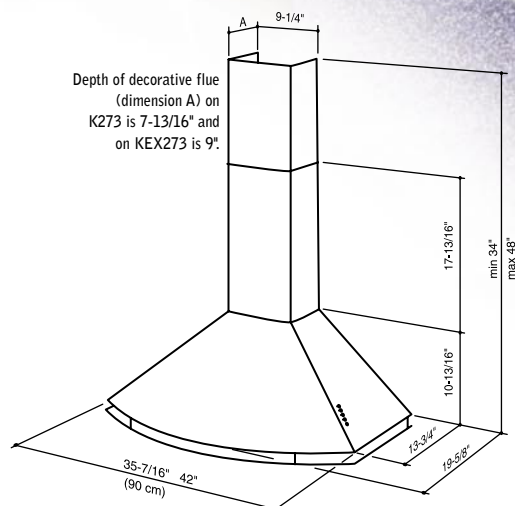

For installation guidelines and product details see pages 48 – 50.

Every once in while there's a product that simply needs no introduction. Where form doesn't follow function, but rather walks beside it in perfect harmony.



Model	Width	Blower	CFM	Finish
K273	35-7/16", 42"	INT. ■	500	304 Brushed Stainless, Black, White
KEX273	35-7/16", 42"	EXT. ♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless,

■ Blower included. ♦ Blower purchased separately.



It could be the finely sculpted body of an Italian sport coupe, with lines that could slice the wind as easily as they cut through the ordinary.



## K3139

Classic Italian design in soft radius surfaces, and finished in brushed stainless or two durable powder coated colors

Quiet, efficient internal blower with HVI certified performance (see p. 46)

Easily accessible stainless steel/aluminum mesh filter is dishwasher safe

Dual halogen lighting system

Conveniently located pushbuttons control speed and lights

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Ducted/non-ducted telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Halogen lamps illuminate the cooktop brilliantly.



Three-speed push-button control includes an "ON" indicator.

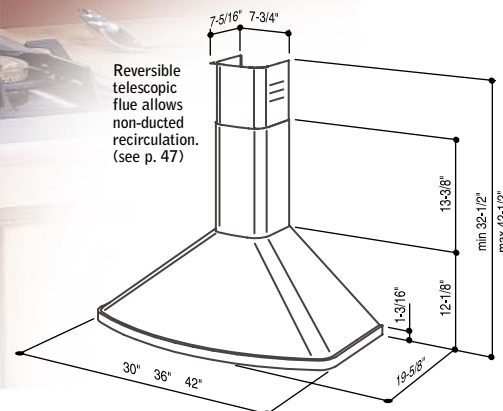

Model	Width	Blower	CFM	Finish
K3139	30", 36", 42"	INT. ■	400	430 Brushed Stainless Black, White

■ Blower included.

For installation guidelines and product details see pages 48 – 50.

## K29

Seamless design and a bold shape in brushed stainless, or two durable powder coated finishes

Quiet, efficient internal blower with HVI certified performance (see p. 46)

Easily accessible stainless steel/aluminum mesh filter is dishwasher safe

Dual halogen lighting system

Conveniently located pushbuttons control speed and light.

Heat Sentry™ detects excessive heat and adjusts speed to high automatically

Ducted/non-ducted telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)




Halogen lights illuminate the cooktop surface. Two lamps are on the 36" model, and four on the 48" model.



Controls feature an "ON" indicator, and 3-speed push-button operation.

The ageless elegance of the pyramid is strikingly simple and a bold complement to any decorating style.

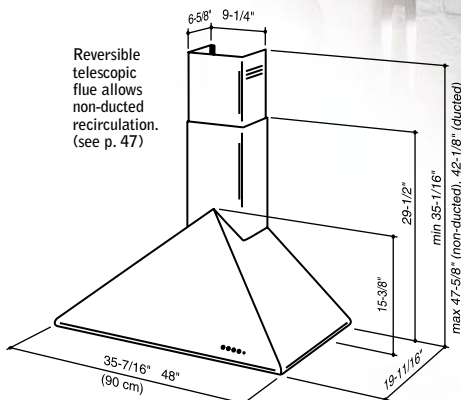

Model	Width	Blower	CFM	Finish
K29	35-7/16", 48"	INT. ■	500	304 Brushed Stainless Black, White

■ Blower included.

For installation guidelines and product details see pages 48 – 50.



When you design a kitchen for the unique individuals who use it, complement it with something surprising and of singular beauty.



## K30

Seamless, multi-faceted construction in brushed stainless or two durable powder coated finishes

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Quick release stainless steel/aluminum mesh filters are dishwasher safe

Two-level halogen lighting

Electronic controls include a 10 minute time-delay shut-off feature and a reminder light for filter maintenance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



4-speed push-button controls are tastefully hidden from view.



Halogen lights illuminate the cooktop surface brilliantly. Two lamps are on the 36" model, and three on the 48" model.

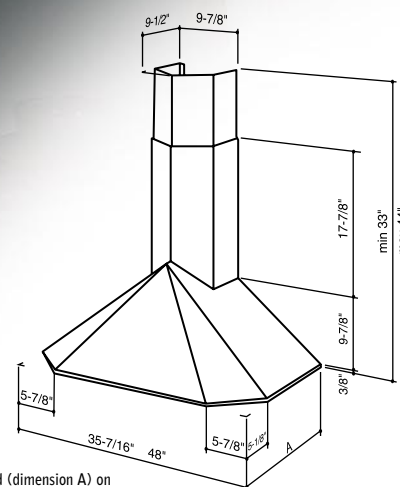

Depth of hood (dimension A) on K30 is 19-5/8" and on KEX30 is 22".

Model	Width	Blower	CFM	Finish
K30	35-7/16", 48"	INT. ■	500	304 Brushed Stainless, Black, White
KEX30	35-7/16", 48"	EXT. ♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless

■ Blower included. ♦ Blower purchased separately.

For installation guidelines and product details see pages 48 – 50.

## KER222

Three beautiful metal finishes, or two durable powder coated surfaces are surrounded by a polished tubular utensil rail

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Halogen lamps flood the work surface with light

Quick-release, stainless steel/aluminum mesh filters are dishwasher safe

Side rails remove for installation between cabinets


Electronic controls feature a 10 minute time-delay shut-off and a reminder light for filter maintenance

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Two brilliant halogen lights come with the 35-7/16" wide model; four with 42" and 48" models.



Four blower speed levels are accessible with advanced touch control pushbuttons.

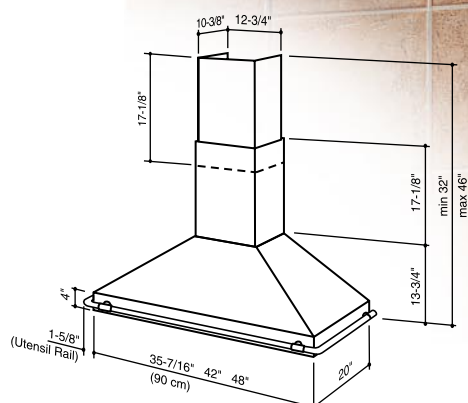

Some things simply demand to be used everyday. They work hard, clean easily, and even lend a hand when it's needed most.



Model	Width	Blower	CFM	Finish
KER222	35-7/16", 42", 48"	INT.■	1000	304 Brushed Stainless w/chrome rail; Black, White, Polished Brass, Brushed Copper w/brass rail
KEX222	35-7/16", 42", 48"	EXT.♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless w/chrome rail

■ Blower included. ♦ Blower purchased separately.

For installation guidelines and product details see pages 48 – 50.



Who ever said that beauty needs to be handled carefully? We suspect they never experienced the simple joy of working beneath a range hood like this.



## K42

Ultra-simple design is a statement in itself in three fine metal finishes, or two durable powder coated colors

Accent trim can create a monochromatic look, or a duo-tone designer style

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46) – 24" deep design for greater capture effectiveness

Quick-release, stainless steel/aluminum mesh filters are dishwasher safe

Dual halogen lighting system

Concealed slide controls are conveniently located

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)



Brilliant halogen lamps illuminate the entire cooktop surface.



Decorative accent trim is available in chrome, stainless steel, black, white, or polished brass.

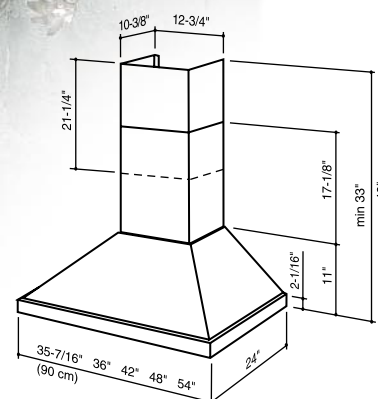

Model	Width	Blower	CFM	Finish
K42	35-7/16", 36", 42", 48", 54"	INT. ■	1000	304 Brushed Stainless, Black, White, Polished Brass, Brushed Copper
KEX42	36", 42", 48", 54"	EXT. ♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless

■ Blower included. ♦ Blower purchased separately.

For installation guidelines and product details see pages 48 – 50.

## K41

Simple, classic design is available in three beautiful metals, or two durable powder coated colors

Decorative trim creates a monochromatic look, or a duo-tone designer style

Quiet, efficient internal blower with HVI certified performance (see p. 46)

Quick-release, stainless steel/aluminum mesh filters are dishwasher safe

Halogen lamps provide brilliant accent lighting

Three-speed slide control

Heat Sentry™ detects excessive heat and adjusts speed to high automatically

Telescopic flue for 8' to 9' ceilings – Custom extensions available (see p. 44)




Easy access slide controls are hidden from view.



Decorative accent trim is available in chrome, stainless steel, black, white, polished brass or brushed copper.

For the kitchen where space poses limits but openness is desired, this range hood is the answer to an endless wish list.

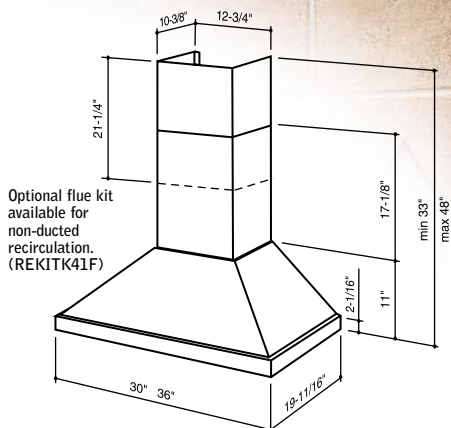

For installation guidelines and product details see pages 48 – 50.

Model	Width	Blower	CFM	Finish
K41	30", 36"	INT. ■	500	304 Brushed Stainless, Black, White, Polished Brass, Brushed Copper

■ Blower included.



Seamless, elegant and unpretentious. In the most contemporary kitchen or a traditional classic, this range hood brings everything together.



## K34

Low-profile, sleek design provides a contemporary appearance in brushed stainless or two durable powder coated finishes

Quiet, efficient internal blower with HVI certified performance (see p. 46)

Quick-release, stainless steel/aluminum mesh filters are dishwasher safe

Dual halogen lighting system

Convenient three-speed push-button controls

Heat Sentry™ detects excessive heat and adjusts speed to high automatically


Ducted/non-ducted telescopic flue for 8' to 10' ceilings – Custom extensions available (see p. 44)



Brilliant halogen lighting provides work surface illumination.



Intuitive push-button controls operate speed and lights. Includes indicator for "ON."

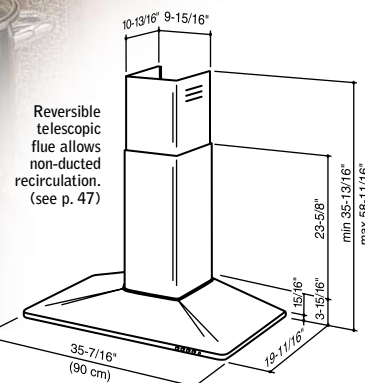

Model	Width	Blower	CFM	Finish
K34	35-7/16"	INT. ■	500	430 Brushed Stainless Black, White

■ Blower included.

For installation guidelines and product details see pages 48 – 50.



*The finest materials.*





*The gift of the legacy is best learned  
under a master.*



*A true master does not simply hand over his or her talents  
to the next generation. While the mechanics of the process can  
be documented, what is in the heart is only learned working  
side-by-side. This is the promise our masters build into  
every Best® range hood.*

# **P R O F E S S I O N A L**

**You can tell when a product is meant  
for work. But that doesn't mean it  
has to be hard on the eye, at least  
not when you're talking about  
Best® professional style range hoods.  
Indoors or outside, one look suggests  
these hoods can handle just about  
anything – from high heat and  
exhaust needs to the demands of an  
experienced cook.**





When everything needs to get done at once, your range hood has to be capable. Here's a solution that's equipped to handle the load.

## K260A

This professional-style range hood is available in brushed stainless, or two durable powder coated finishes

Deep hood enclosure ensures excellent capture of smoke and odors

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Flexible design allows blowers to exhaust through the top or back of the hood

Dishwasher-safe, stainless steel/aluminum mesh filters

Halogen lamps deliver brilliant work surface lighting

Concealed variable-speed slide control

Heat Sentry™ detects excessive heat and adjusts speed to high automatically

Optional decorative soffit flue (see p. 44)




Two halogen lamps in 30", 35 $\frac{1}{16}$ ", 36" models; four lamps in all others.



Optional stainless baffle filters complete the professional look.

Optional decorative flue shown here is available as an accessory

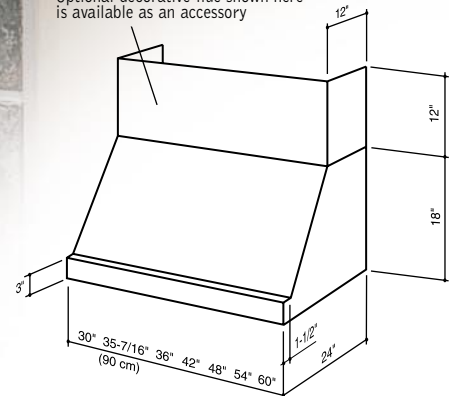

For installation guidelines and product details see pages 48 – 50.

Model	Width	Blower	CFM	Finish
K260A	30", 35-7/16", 36", 42", 48", 54", 60"	INT. ♦ EXT. ♦ (see page 46)	600, 1200 600, 900, 1200, 1500	430 Brushed Stainless Black, White

♦ Blower purchased separately.



## K260D

Professional-style hood for covered patio or lanai areas is finished in corrosion-resistant stainless steel

Large hood is designed to handle high heat levels

Powerful yet quiet internal blower with HVI certified performance (see p. 46)

Dishwasher-safe, stainless steel/aluminum mesh filters

Halogen lamps provide brilliant surface lighting

Concealed controls operate variable-speed blowers

Heat Sentry™ detects excessive heat and adjusts blower speed automatically

Optional soffit flue and backsplash are designed with corrosion resistant stainless steel (see p. 44)




Two halogen lamps in the 36" model; four in the 48" model.

Simple pleasures like the aroma of food cooking and the beauty of a blazing sunset are best appreciated outdoors. This ruggedly elegant hood clears the air so you can enjoy nature.



Optional decorative flue shown here is available as an accessory

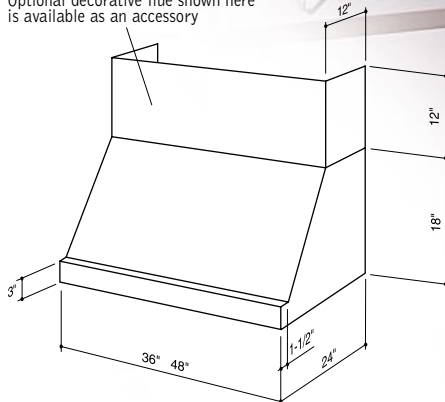


Shown: K260D with optional backsplash

Model	Width	Blower	CFM	Finish
K260D	36", 48"	INT. ♦	1200	316 Brushed Stainless

♦ Blower purchased separately.



There's a timeless simplicity to some things, where going home means things never change. Perhaps it's why this design will inspire so many memories.

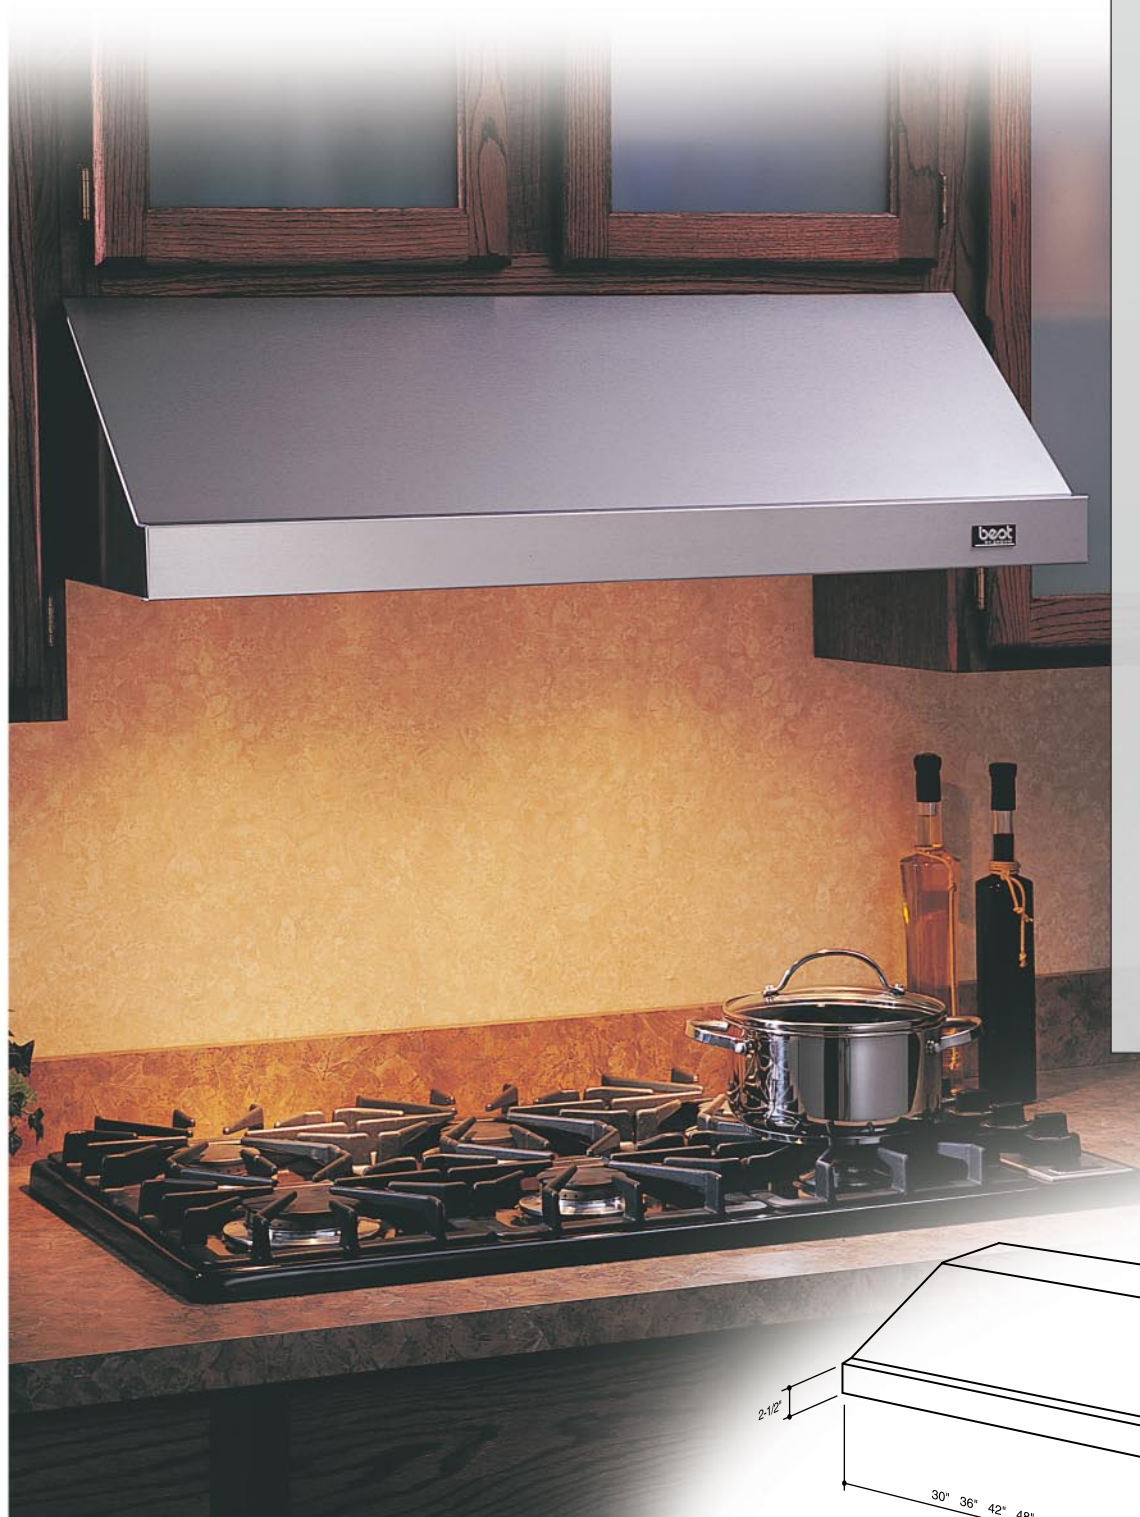

## K210A

Professional-style range hood for under-cabinet installation is available in stainless, or two durable powder coated finishes

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Easily accessible, stainless steel/aluminum mesh filters are dishwasher safe

Brilliant halogen lamps illuminate the work surface

Hidden, variable-speed slide controls offer simple and convenient blower adjustment


Heat Sentry™ detects excessive heat and adjusts speed to high automatically



Designed to accommodate two 50-watt halogen lamps in 30" and 36" models; three in the 42" and 48" models (bulbs purchased separately).



Optional baffle filters complete the professional look.

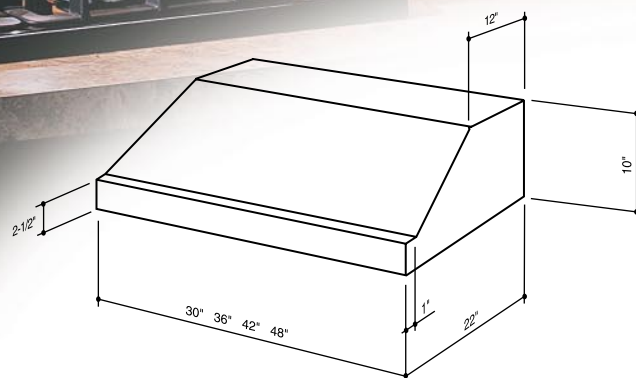

Model	Width	Blower	CFM	Finish
K210A	30", 36", 42", 48"	INT. ♦ EXT. ♦ (see page 46)	500, 900 600, 900, 1200, 1500	430 Brushed Stainless Black, White

\*30" model not available with 900 CFM blower. ♦ Blower purchased separately.

For installation guidelines and product details see pages 48 – 50.





*Form and function*



*One without the other  
simply isn't quite as sweet.*



*Beauty and utility should never be mutually exclusive. This is the hallmark of Best® by Broan range hoods. Every design first appeals to the senses, whether your taste is traditional, contemporary or eclectic. Yet each soon reveals that while they are wonderful to admire, they are also meant to perform.*

## BUILT-IN

Just because it can't be seen surely  
does not mean it's not ready to work  
for you — instantly. That is exactly  
why we developed the Built-in  
Collection. When the design of your  
cabinetry or the style of your  
kitchen is a statement in itself,  
perhaps your range hood shouldn't  
command attention. If that's the  
case, we have you covered.



**best**  
BY EROAN



You'd never know it's a range hood. Hidden behind the façade of your cabinetry or other design elements, this hood works quietly and never takes the credit it is due.

## PIK Pro-Style Insert

Elegant, easy-to-clean brushed stainless finish is completed with professional-style baffle filters

Outdoor-rated version PIK33D available for covered patios and lanai areas

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

To protect cabinetry, use with optional Best custom hood liners (see p. 45)

Bright, flush-mount halogen lighting (bulbs purchased separately)

Variable-speed slide control, or optional wall-mounted control panel (see p. 45)


Heat Sentry™ detects excessive heat and adjusts speed to high automatically



Adjustable liners ensure a perfect fit in custom enclosures. See page 45.



Optional lighting can be added to Best liners. See page 45.

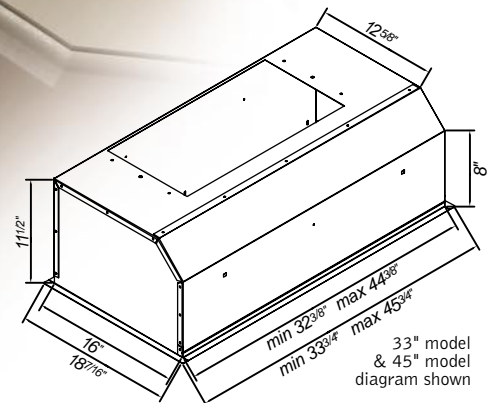

For installation guidelines and product details see pages 48 – 50.

Model	Width	Blower	CFM	Finish
PIK	33-3/4", 45-3/4"	INT. ♦	460, 850	430 Brushed Stainless
		EXT. ♦ (see page 46)	600, 900, 1200, 1500	
PIK33D	33-3/4"	INT. ♦	850 (P8D)	316 Brushed Stainless
		EXT. ♦ (see page 46)	1200, 1500	

♦ Blower purchased separately.

## PK22

Combine a high-end, brushed stainless look with professional-grade performance

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46)

Quick-release, stainless steel/aluminum mesh filters are dishwasher-safe

To protect cabinetry, use with optional Best custom hood liners (see p. 45)

Brilliant halogen lighting


Add the ambient light panel for extra drama when using the optional Best liners (see p. 45)

Slide control allows multi-speed adjustment

Heat Sentry™ detects excessive heat and adjusts speed to high automatically




The 29" model features two halogen lights, while the 38" model features four.



Adjustable liners ensure a perfect fit in custom enclosures. (See p. 45)

It's everything you never wanted in a range hood. When dreams call for fine millwork or custom hood designs, this attractive concealed hood will bring everything together.

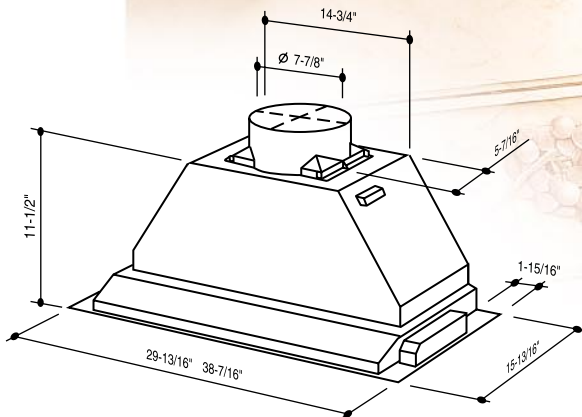

For installation guidelines and product details see pages 48 – 50.

Model	Width	Blower	CFM	Finish
PK22	29-13/16", 38-7/16"	INT.■	1000	304 Brushed Stainless
PKEX2238	38-7/16"	EXT.♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless

■ Blower included. ♦ Blower purchased separately.



When your sense of style demands that everything has its place, this concealed range hood knows exactly what you mean.



## P195

Flush-mount, under-cabinet design in brushed stainless, black or white finishes

Quiet, efficient internal blower with HVI certified performance (see p. 46)

Three-speed push-button control

To protect cabinetry, use with optional Best custom hood liners (see p. 45)

Drop-down panel provides access to dishwasher-safe stainless steel/aluminum mesh filters

Brilliant dual halogen lighting

Add the ambient light panel for extra drama when using the optional Best liners (see p. 45)

Heat Sentry™ detects excessive heat and adjusts speed to high automatically



Charcoal filter kits are available for the P1951M when recirculating air into the kitchen is desired (duct-work required – see p. 47)



Push-button control provides convenient operation of blower and lights



Adjustable liners ensure a perfect fit in custom enclosures. (see p. 45)

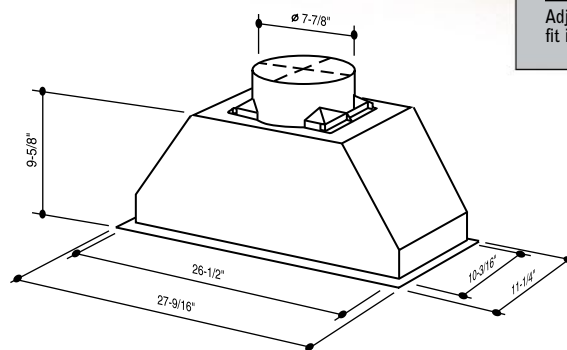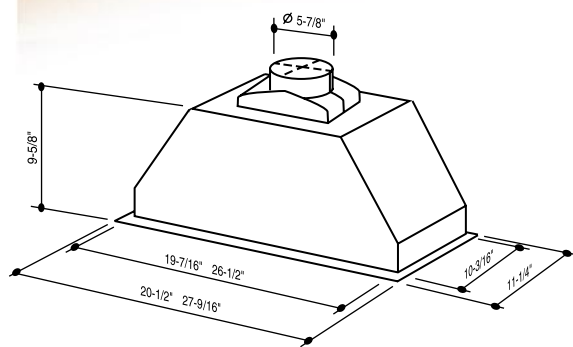

Model	Width	Blower	CFM	Finish
P1951M	20-1/2", 27-9/16"	INT. ■	400	430 Brushed Stainless, Black, White
P1952M	27-9/16"	INT. ■	800	430 Brushed Stainless, Black, White

■ Blower included.

For installation guidelines and product details see pages 48 – 50.

## U102

Modern slim design in brushed stainless or two durable powder coated colors provides effective ventilation in an ultra-compact package – 12" retracted, 18" extended

Decorative filler provides a small backsplash

Quiet, efficient internal or external\* blowers with HVI-certified performance are hidden in the cabinet above the hood (see p. 46)

Dishwasher-safe stainless steel filter

Optional charcoal filter kit for recirculating air to the kitchen (duct work required — see p. 47)

Bright halogen lighting with two intensity settings

Manually extend the glass visor to automatically activate the fan and lighting

10-minute time-delay shut-off feature and reminder indicator for filter maintenance


Heat Sentry™ detects excessive heat and adjusts speed to high automatically

Not recommended for use with gas or electric grills

If you've ever wanted a range hood that shuns attention – except when you want it – welcome to your answer.



The U102 features electronic four-speed push-button controls with an easy-to-read blue digital display.

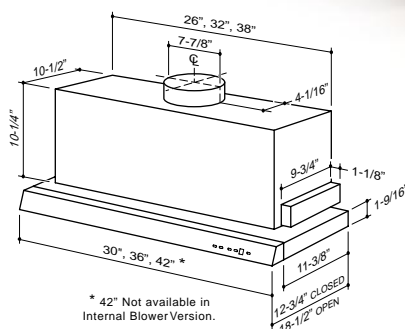

For installation guidelines and product details see pages 48 – 50.

Model	Width	Blower	CFM	Finish
U102I	30", 36"	INT. ■	500	304 Brushed Stainless, Black, White
U102E	30", 36", 42"	EXT. ♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless, Black, White

■ Blower included. ♦ Blower purchased separately.



There when you need it, hidden when it's not. With a single touch, this unique range hood rises and retracts gracefully.



## DD01

Exceptional appearance in a sleek, retractable design for professional-grade performance

Finished in brushed stainless

Chimney raises over 9-1/2" at the touch of a button

Powerful yet quiet internal and external blowers with HVI certified performance (see p. 46) are hidden below the down-draft chimney

Electronic multi-speed control includes a 10 minute time-delay shut-off, and a reminder light for filter maintenance

Remote control included to operate Down Draft from another location


Advanced Heat Sentry™ detects excessive heat and adjusts speed automatically



Attractive polished stainless steel/aluminum mesh filters are dishwasher-safe.



Stylish touch-button control provides 3-speed operation.

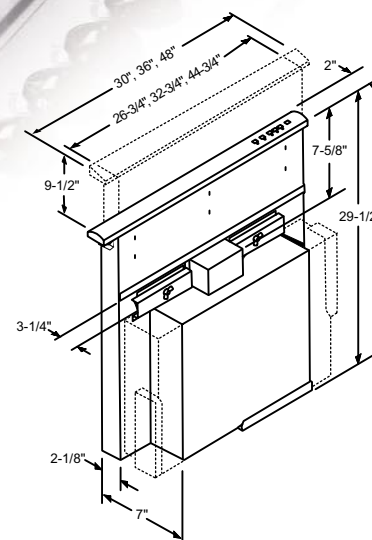

Exhaust flexibility allows blower connections to be ducted left, right or downward (from left to right)

Model	Width	Blower	CFM	Finish
DD01	30", 36", 48"	INT. ■	500	304 Brushed Stainless
DDEX	30", 36", 48"	EXT. ♦ (see page 46)	600, 900, 1200, 1500	304 Brushed Stainless

■ Blower included. ♦ Blower purchased separately.

For installation guidelines and product details see pages 48 – 50.

## ACCESSORIES


Completing the designer look to complement your style and functional preferences is simple with our fine line of accessories. Backsplashes, flue extensions, blower options, and recirculating flues with charcoal filters can be added easily to meet individual needs. Our liners and wall control units provide a truly custom solution for built-in products. With Best accessories, you'll capture the custom look without the custom hassle.

### Backsplashes

A backsplash provides a dramatic and functional backdrop for your Best wall-mounted range hood. When protection is needed, a backsplash is an easy-to-clean option to materials such as tile and stone.


#### RMP

Fits Models: K260A & K210A  
Height: 33 1/2"  
Width: 30", 36", 42", 48", 54" & 60"  
Finish: Stainless steel





#### BSK260D

Fits Model: K260D  
Height: 33 1/2"  
Width: 36" & 48"  
Finish: 316 stainless steel



#### BSK6


Fits Models: K15, K29, K30, KEX30 & K34\*  
Height: 60"  
Widths: 30", 36", 42", 48", 90 cm  
Finishes: Black, Stainless steel, White

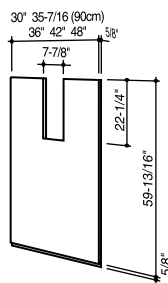

\*Contact technical support prior to ordering for K34.

#### BSK1

Fits Models: K41, K42, KER222, KEX42 & KEX222  
Height: 60"  
Widths: 30", 36", 42", 48", 90 cm  
Finishes: Black, Stainless steel, White

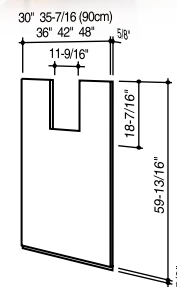

### Flue Extensions

Optional flue extensions for 10' ceiling applications are available for most Chimney, Wall and Island range hoods (see Accessories, page 49). For Professional-Style hoods, a soffit flue adds 12 vertical inches to the top of the hood. Custom height extensions are available by special order.


#### Chimney Flue Extension

- Seamless construction
- Designed for ducted applications unless specifically noted
- Hood matching finishes
- Simply replaces upper section of standard flue extension that comes with hood.
- Island flue extensions also include an upper skeleton for mounting to the ceiling



#### K260A/K260D Soffit Flue

- Hood matching finishes
- Seamless construction
- Simply attaches to top of hood shell
- Widths up to 60"
- K260D soffit is constructed of 316 brushed stainless for outdoor corrosion resistance

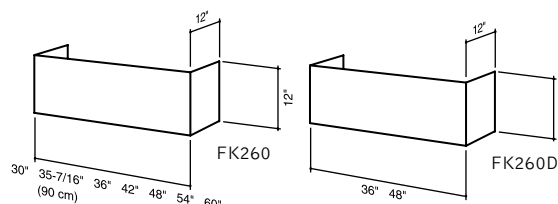


best  
BY BROAN



## Liners


Best Liners provide a beautiful way to finish your custom hood and protect your cabinetry. Designed to work with the Best Pro-Insert and Power Packs, liners feature a 3" adjustable nose to provide application flexibility, and a 4" depth for excellent capture. To highlight the beauty of your cooking appliance, our optional ambient lighting panel is a perfect addition. It works with your under-cabinet lighting, and can be added to any Best Liner.

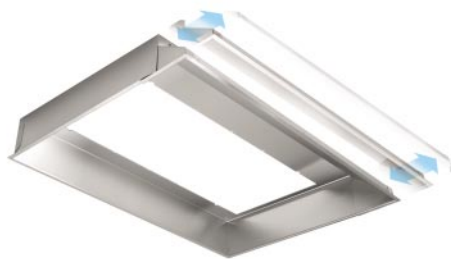


### Liners for PIK Pro-Style Insert

- Brushed stainless steel finish
- Available in 36", 42", 48" and 60" widths
- Adjustable nose for depths from 22.5" to 25.5"
- Optional ambient light panel

#### L3336S/L3342S for PIK33 Pack

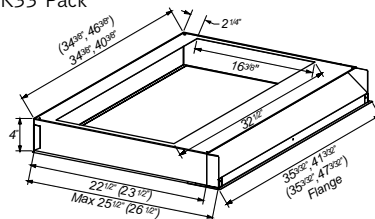

#### L4548S/L4560S for PIK45 Pack

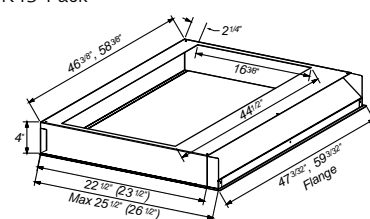

### Liners for PIKD Outdoor Insert (L3336D/L3348D)


Outdoor liner widths for PIK33D shown in parenthesis

- 316 brushed stainless steel finish
- Available in 36" and 48" widths
- Adjustable nose for depths from 23.5" to 26.5"


### Liners for PK22

- Brushed stainless steel finish
- 36", 42", 48" and 60" widths available
- Flexible design allows for 20.5" to 23.5" depth adjustment
- Optional ambient light panel

#### L2936/L2942 for PK2229 Pack

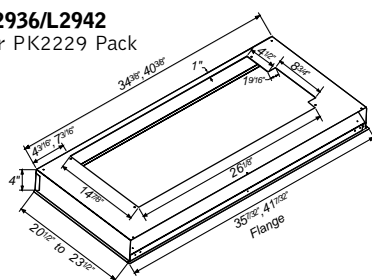


#### L3848/L3860 for PK2238 Pack

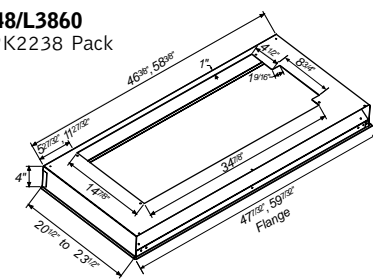


### Liners for P195

- Brushed stainless steel finish
- 30", 36" and 48" widths available
- Flexible design allows for 17.5" to 20.5" depth adjustment
- Optional ambient light panel

#### L5230 for P1951M 52 cm

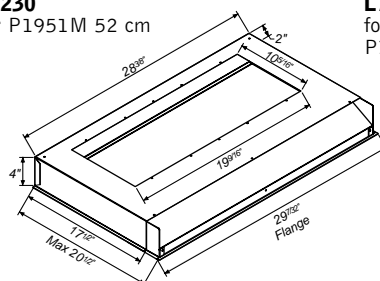

#### L7030/L7036/L7048 for P1951M 70 cm and P1952M 70 cm

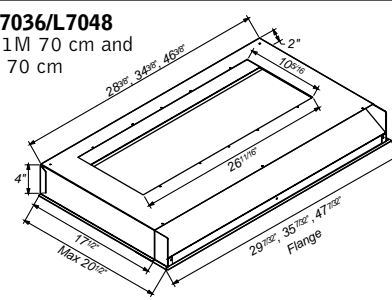

### Ambient Light Panel (fits all Best® Liners)

- Brushed stainless steel finish
- Available for 30", 36", 42", 48" and 60" liner models
- Bright halogen lighting system is designed to work with under cabinet lighting control—bulb type 120V GU10 50 Watt
- 30", 36", 42" light panels feature 2 lights
- 48" and 60" light panels feature 3 lights
- On/Off override switch
- Not for use with outdoor installations




Shown: Model ALP48

## Wall Control WCPI

### Wall-mounted remote control for PIK Series

- Optional wall-mounted remote control panel provides light and blower control
- Brushed stainless steel finish
- Black controls
- Not for use with outdoor installations

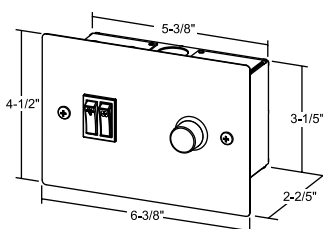

Various internal and external blower options are available for Best® range hoods, allowing you to choose the model that meets your unique application. Your Best representative can assist you with your selection. Use the chart on the bottom of the page to find the blower option best suited to your needs.

## Internal Blowers

Best® by Broan internal blowers provide exceptional performance and sound levels that are both quiet and gratifying. The durable construction features meet the rigorous needs of professional-style cooking appliances found in today's homes.



## External Blowers


**Exterior EB6, EB9, EB12 and EB15 blowers** can be roof- or wall-mounted, depending on your appearance preferences, or to best suit the ducting requirements of the application. Blower housings are crafted from durable, weather resistant, brushed aluminum for worry-free installation. Housings can be painted to match your décor.

Model	Width "A"	Width "B"
EB12	22"	18"
EB15	25"	21"


**EB6 and EB9**




Wall mounted



Roof mounted




**EB12 and EB15**



Wall mounted





Roof mounted



**Inline ILB3, ILB6, ILB9, ILB11 blowers** can be mounted remotely to minimize blower noise. Powerful and quiet, inline blowers are available in a range of CFM ratings to match your cooking preferences and ventilation requirements. Specially designed resilient motor mounts and housing isolation mounts prevent vibration noise. Flexible duct design allows straight-through or right-angle connections with built-in damper. Available in November, 2004.

**ILB3**



Product		Blower		Performance			Duct Type		Electrical <sup>2</sup>	Motor	Hood Compatibility <sup>3</sup>
Series	Category	Type	Vertical CFM/Sones	Horizontal CFM/Sones	HVI	Size	Direction		Amps @ 120V	Type	
P5	INT.	Internal	460 / 10	500 / 10	Y	3-1/4" x 10"	V or H		1.8	Single Speed	K210A, PIK
P6	INT.	Internal	600 / 6	na	Y	7" Round	V or H		3.3	Single Speed	K260A
P8	INT.	Internal	850 / 10.5	900 / 10	Y	3-1/4" x 14"	V or H		3.4	Single Speed	K210A36, K210A42, K210A48, PIK
P12	INT.	Internal	1200 / 12	1200 / 12	Y	4-1/2" x 18"	V or H		5	Single Speed	K260A, K260D
EB6	EXT.	Exterior	600 / na	na*	Y	10" Round	V*		2.3	Single Speed	All KEX, All IEX, K210A, K260A, PIK, PKEX22, DDEX
EB9	EXT.	Exterior	900 / na	na*	Y	10" Round	V*		5.8	Single Speed	All KEX, All IEX, K210A, K260A, PIK, DDEX
EB12	EXT.	Exterior	1200 / na	na*	Y	10" Round	V*		3	Single Speed	All KEX, All IEX, K210A, K260A, PIK, DDEX
EB15	EXT.	Exterior	1500 / na	na*	Y	10" Round	V*		3.8	Single Speed	All KEX, All IEX, K210A, K260A, PIK, DDEX
Series	Category	Type	Straight Through CFM/Sones	Right Angle CFM/Sones	HVI	Inlet/Outlet	Direction		Amps @ 120V	Type	
ILB3	EXT.	Inline	285 / 3.5	250 / 4.0	Y	8" / 8" Round	V or H		2.6	Single Speed	All KEX, All IEX, K210A, K260A, PIK, DDEX
ILB6	EXT.	Inline	625 / 4.0	600 / 5.5	Y	10" / 10" Round	V or H		2.7	Single Speed	All KEX, All IEX, K210A, K260A, PIK, DDEX
ILB9	EXT.	Inline	860 / 4.0	750 / 5.0	Y	10" / 12" Round	V or H		2.5	Single Speed	All KEX, All IEX, K210A, K260A, PIK, DDEX
ILB11	EXT.	Inline	1100 / 6.5	1000 / 7.5	Y	10" / 12" Round	V or H		4.4	Single Speed	All KEX, All IEX, K210A, K260A, PIK, DDEX

\* Exterior Blowers duct connection can be attached to the back (horizontal) of the K260A.

<sup>2</sup> All Best blower motors are thermal overload protected.

<sup>3</sup> All "EX" models require a transition from 8" to 10" for use with Exterior Blowers.



## Charcoal Filters

Charcoal filters are available for use with range hoods that recirculate filtered air back into the kitchen. These filters are designed to absorb odors as well as filter out contaminants.




Filters for K3139



Filters for K41, IS23, P1951M & U102I



Filter for K29 & K34



Filters for IS170, K7388, K7788 & K8087

## Recirculating Flues

Best Models K29, K34, K3139, K7388, K7788, K8087, IS23 and IS170 feature a flue that can be reversed to provide non-ducted recirculating convenience. Just add charcoal filters, or a non-ducted recirculating kit.

Model K41 can be converted to non-ducted operation with the addition of an optional REKITK41F kit that includes a recirculating flue and charcoal filters.


Models P1951M and U102I can be installed non-ducted by adding charcoal filters. Just add a standard duct to the exhaust outlet and vent air back into the kitchen through the soffit.

For more specific product details see pages 48-50.




## Duct Accessories

Best® by Broan ductwork accessories are matched to our range hood requirements. These elbows, extensions and duct transition accessories ensure proper air flow and volume requirements. Refer to individual product requirements for more details.

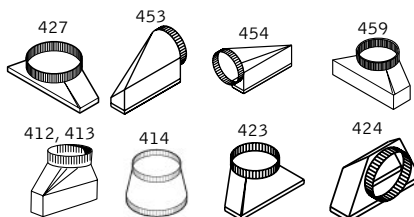

Transition Model	Description
412H	3-1/4" x 10" x 7" rd.-vert.
413	3-1/4" x 10" x 8" rd.-vert.
459	3-1/4" x 14" x 8" rd.
414	8" to 10" rd.
423	4-1/2" x 18-1/2" to 10" rd.-vert.
424	4-1/2" x 18-1/2" to 10" rd.-firt.rear
427	4-1/2" x 18-1/2" to 10" rd. thin wall horizontal
453	4-1/2" x 18-1/2" to 10" rd.-left
454	4-1/2" x 18-1/2" to 10" rd.-right

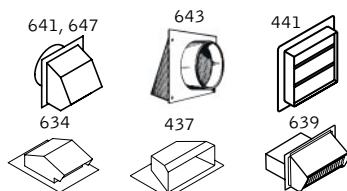

Roof and Wall Cap Model	Description
437	Roof 10" rd., black
441	Wall 8" to 10" rd., paintable
634	Roof 6" to 8" rd. or 3-1/4" x 10", black
639, 641, 643, 647	Wall 6", 7", 8" rd. or 3-1/4" x 10", aluminum



Elbow Model	Description
415	7" rd. adjustable
418	10" rd. adjustable
419	6" rd. adjustable



Duct Model	Description
406	6" rd. duct - 2 ft. section
407	7" rd. duct - 2 ft. section
410	10" rd. duct - 2 ft. section



HVI-2100 Certification assures that every Best® range hood and blower is independently tested and certified by the Home Ventilating Institute to consistently deliver the ventilation and sound performance specified.

# PRODUCT SPECIFICATIONS

Product		Finish <sup>1</sup>		Sizes		Lighting			Controls <sup>2</sup>			Filter		Accessories	
Series	Cat. Pg.	Std.	Special Order	Width	Depth	Type	Qty	Levels	Type	Feature	Remote	Std.	Opt.	Backsplash	
<b>Island</b>															
IS102	6,7	304 SS	Blk, Wht	47 $\frac{1}{4}$ "	35 $\frac{1}{16}$ "	Halo., G4-20W	4	1	3-S Slide	HS	na	SS Mesh	na	na	
IEX102	6,7	304 SS	na	47 $\frac{1}{4}$ "	35 $\frac{1}{16}$ "	Halo., G4-20W	4	1	VS Slide	HS	na	SS Mesh	na	na	
IS502	8	304 SS	na	39 $\frac{3}{8}$ "	27 $\frac{1}{16}$ "	Halo., G4-20W	2	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
IS241/ BER02IS	9	304 SS	Blk, Wht, PB, BCu	47 $\frac{1}{4}$ " Dia	–	Halo., MR16	2	1	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
IS170	10	304 SS	Blk, Wht	39 $\frac{3}{8}$ "	27 $\frac{1}{16}$ "	Halo., MR16	4	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
IEX170	10	304 SS	na	39 $\frac{3}{8}$ "	27 $\frac{1}{16}$ "	Halo., MR16	4	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
ISER222	11	304 SS	Blk, Wht, PB, BCu	48"	27 $\frac{1}{16}$ "	Halo., G4-20W	4	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
IEX222	11	304 SS	na	48"	27 $\frac{1}{16}$ "	Halo., G4-20W	4	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
IS42	12	304 SS	Blk, Wht, PB, BCu	39 $\frac{3}{8}$ " 51 $\frac{3}{16}$ "	27 $\frac{1}{16}$ " 35 $\frac{1}{16}$ "	Halo., MR16	4	1	3-S Slide	HS	na	SS Mesh	na	na	
IEX42	12	304 SS	na	39 $\frac{3}{8}$ "	27 $\frac{1}{16}$ "	Halo., MR16	4	1	VS Slide	HS	na	SS Mesh	na	na	
IS23	13	430 SS	Blk, Wht	35 $\frac{1}{16}$ "	23 $\frac{3}{8}$ "	Fluor.	2	1	3-S PB	HS	na	SS Mesh	na	na	
<b>Chimney</b>															
K7788	16,17	304 SS w/ Blk glass trim	304 SS w/ Grn, Blue, Red trim*	36"	19 $\frac{1}{16}$ "	Halo., G4-20W	2	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
KEX7788	16,17	304 SS w/ Blk glass trim	na	36"	19 $\frac{1}{16}$ "	Halo., G4-20W	2	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
K8087	18	304 SS	na	30", 36"	19 $\frac{1}{16}$ "	Halo., G4-20W	2	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
KEX8087	18	304 SS	na	36"	19 $\frac{1}{16}$ "	Halo., G4-20W	2	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
K7388	19	430 SS	na	35 $\frac{1}{16}$ "	19 $\frac{3}{8}$ "	Halo., G4-20W	2	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
K3500	20	304 SS	na	35 $\frac{1}{16}$ "	21 $\frac{1}{8}$ "	Halo., G4-20W	2	2	4-S EPB	HS,D0,FT	na	Alum.	na	na	
KEX3500	20	304 SS	na	35 $\frac{1}{16}$ "	21 $\frac{1}{8}$ "	Halo., G4-20W	2	2	4-S EPB	HS,D0,FT	na	Alum.	na	na	
K15	21	430 SS	Blk, Wht	35 $\frac{1}{16}$ "	21 $\frac{1}{8}$ "	Halo., G4-20W	2	1	3-S Slide	HS	na	SS Mesh	na	BSK6	
K273	22	304 SS	Blk, Wht	35 $\frac{1}{16}$ ", 42"	19 $\frac{3}{8}$ "	Halo., MR16	2	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
KEX273	22	304 SS	na	35 $\frac{1}{16}$ ", 42"	19 $\frac{3}{8}$ "	Halo., MR16	2	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	na	
K3139	23	430 SS	Blk, Wht	30", 36", 42"	19 $\frac{3}{8}$ "	Halo., G4-20W	2	1	3-S PB	HS	na	SS Mesh	na	na	
K29	24	304 SS	Blk, Wht	35 $\frac{1}{16}$ " 48"	19 $\frac{1}{16}$ "	Halo., G4-20W	$\frac{2}{4}$	1	3-S PB	HS	na	SS Mesh	na	BSK6	
K30	25	304 SS	Blk, Wht	35 $\frac{1}{16}$ " 48"	19 $\frac{3}{8}$ " 22"	Halo., MR16	$\frac{2}{3}$	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	BSK6	
KEX30	25	304 SS	na	35 $\frac{1}{16}$ " 48"	19 $\frac{3}{8}$ " 22"	Halo., MR16	$\frac{2}{3}$	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	BSK6	
KER222	26	304 SS	Blk, Wht, PB, BCu	35 $\frac{1}{16}$ " 42", 48"	20"	Halo., G4-20W	$\frac{2}{4}$	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	BSK1	
KEX222	26	304 SS	na	35 $\frac{1}{16}$ " 42", 48"	20"	Halo., G4-20W	$\frac{2}{4}$	2	4-S EPB	HS,D0,FT	na	SS Mesh	na	BSK1	
K42	27	304 SS	Blk, Wht, PB, BCu	35 $\frac{1}{16}$ ", 36", 42", 48", 54"	24"	Halo., MR16	2	1	3-S Slide	HS	na	SS Mesh	na	BSK1	
KEX42	27	304 SS	na	36", 42", 48", 54"	24"	Halo., MR16	2	1	VS Slide	HS	na	SS Mesh	na	BSK1	
K41	28	304 SS	Blk, Wht, PB, BCu	30", 36"	19 $\frac{1}{16}$ "	Halo., MR16	2	1	3-S Slide	HS	na	SS Mesh	na	BSK1	
K34	29	430 SS	Blk, Wht	35 $\frac{1}{16}$ "	19 $\frac{1}{16}$ "	Halo., G4-20W	2	1	3-S PB	HS	na	SS Mesh	na	BSK6**	
<b>Professional</b>															
K260A	32,33	430 SS	Blk, Wht	30", 35 $\frac{1}{16}$ ", 36" 42", 48", 54", 60"	24"	Halo., PAR20	$\frac{2}{4}$	1	VS Slide	HS	na	SS Mesh	BFK Baffle Kit	RMP	
K260D Outdoor	34	316 SS	na	36" 48"	24"	Halo., PAR20	$\frac{2}{4}$	1	VS Slide	HS	na	SS Mesh	na	BSK260D	
K210A	35	430 SS	Blk, Wht	30", 36" 42", 48"	22"	Halo., PAR20 Purch. Separate	$\frac{2}{3}$	1	VS Slide	HS	na	SS Mesh	BFK Baffle Kit	RMP	
<b>Built-In</b>															
PIK	38,39	430 SS	na	33 $\frac{3}{4}$ " 45 $\frac{1}{4}$ "	18 $\frac{1}{16}$ "	Halo., PAR20 Purch. Separate	$\frac{2}{3}$	1	VS Slide	HS	Optional WCPI	SS Baffle	na	RMP	
PIK33D Outdoor	38,39	316 SS	na	33 $\frac{3}{4}$ "	18 $\frac{1}{16}$ "	Halo.	2	1	VS Rotary	HS	na	SS Baffle	na	BSK260D	
PK22	40	304 SS	na	29 $\frac{1}{16}$ " 38 $\frac{1}{16}$ "	15 $\frac{29}{32}$ "	Halo., MR16	$\frac{2}{4}$	1	3-S Slide	HS	na	SS Mesh	na	na	
PKEX2238	40	304 SS	na	38 $\frac{1}{16}$ "	15 $\frac{29}{32}$ "	Halo., MR16	4	1	VS Slide	HS	na	SS Mesh	na	na	
P1951M	41	430 SS, Blk, Wht	na	20 $\frac{1}{2}$ " 27 $\frac{1}{16}$ "	11 $\frac{1}{4}$ "	Halo., G4-20W	2	1	3-S PB	HS	na	Alum.	na	na	
P1952M	41	430 SS, Blk, Wht	na	27 $\frac{1}{16}$ "	11 $\frac{1}{4}$ "	Halo., G4-20W	2	1	3-S PB	HS	na	Alum.	na	na	
U102I	42	304 SS, Blk, Wht	na	30", 36"	12 $\frac{3}{4}$ "- 18 $\frac{1}{2}$ "	Halo., G4-20W	2	2	4-S PB	HS,D0,FT	na	SS Mesh	na	na	
U102E	42	304 SS, Blk, Wht	na	30", 36", 42"	12 $\frac{3}{4}$ "- 18 $\frac{1}{2}$ "	Halo., G4-20W	2	2	4-S PB	HS,D0,FT	na	SS Mesh	na	na	
DD01	43	304 SS	na	30", 36", 48"	7"	na	na	na	3-S EPB	HS,D0,FT	Yes	SS Mesh	na	na	
DDEX	43	304 SS	na	30", 36", 48"	7"	na	na	na	3-S EPB	HS,D0,FT	Yes	SS Mesh	na	na	

1. Finish Abbreviations: 304 SS = 304 Grade Brushed Stainless Steel, 316 SS = 316 Grade Brushed Stainless Steel, 430 SS = 430 Grade Brushed Stainless Steel, Blk = Black, Wht = White, PB = Polished Brass, BCu = Brushed Copper 2. Control Abbreviations: S = Speeds, VS = Variable Speed, PB = Push Button, EPB = Electronic Push Button, HS = Heat Sentry, D0 = Delay Off, FT = Filter Timer  
\* K7788 has optional front glass panel in Cobalt Blue, Garnet Red or Sage Green available by special order. See pages 16 and 17.



## INSTALLATION GUIDELINES

### Accessories

	Flue Ext. for 10' ceiling	Deco Trim	Liners	Shelves
	FEXTIS102	na	na	na
	FEXTIS102	na	na	na
	FEXTIS502	na	na	na
	FEXTIS241	na	na	na
	FEXTIS170	na	na	GSIS170
	FEXTIS170	na	na	na
	FEXTISER222	na	na	na
	FEXTISER222	na	na	na
	FEXTIS42	FTIS42	na	na
	FEXTIS42	FTIS42	na	na
	FEXTIS23	na	na	na

	FEXTK7788SS	na	na	na
	FEXTK7788SS	na	na	na
	FEXTK8087SS	na	na	na
	FEXTK8087SS	na	na	na
	FEXTK7388SS	na	na	na
	FEXTK3500SS	na	na	na
	FEXTK3500SS	na	na	na
	FEXTK13	na	na	na
	FEXTK273	na	na	na
	FEXTKEX273	na	na	na
	FEXTK3139	na	na	na
	FEXTK23	na	na	na
	FEXTK30	na	na	na
	FEXTK30	na	na	na
	FEXTK42	na	na	na
	FEXTK42	na	na	na
	FEXTK42	FTK42	na	na
	FEXTK42	FTK42	na	na
	FEXTK42	FTK41	na	na
	***	na	na	na

	FK260	na	na	na
	FK260D	na	na	na
	na	na	na	na

	na	na	L33 L45	na
	na	na	L33D	na
	na	na	L29 L38	na
	na	na	L38	na
	na	na	L52 L70	na
	na	na	L70	na
	na	na	na	na
	na	na	na	na
	na	na	na	na
	na	na	na	na

**Easy Installation:** All Best® by Broan range hoods come complete with installation instructions, and all hardware including damper, mounting brackets and screws.

**Recommended Distance from Cooktop Surface:** For optimal effectiveness, the distance from the cooking surface to the bottom of the range hood should be from 24" to 30", unless otherwise noted for the specific hood. To maintain satisfactory capture of smoke and odors when installing a hood at heights greater than the recommended range use the following guideline: For every 3" increase in installation height add 100 CFM to the minimum exhaust requirement and/or a minimum of 3" to the overall width of the hood or liner. It's never recommended to install a Best hood below 24".

**Selecting the Appropriate CFM or Hood Design:** To determine the most favorable hood design, consider the user's cooking style and the cooking product. Heavy use, increased installation heights or high Btu gas appliances would favor hood designs that have larger (deeper) capture areas. Observe the appliance manufacturers' recommendations and always consult local codes and standards. As a general rule, use the following for determining CFM (except for Down Draft):

- Under 60,000 Btu: 100 CFM per linear foot of cooktop width.
- Over 60,000 Btu: 1 CFM per 100 Btu of cooktop output.
- With grill or griddle: Add 200 CFM to your estimated needs based on Btu output of the cooktop surface. Example: 60,000 Btu cooktop = 600 CFM, with gas grill add 200 CFM, CFM total = 800.

**Peak Exhaust Rates at Lowest Sound Levels:** To achieve peak exhaust rates at the lowest sound levels use the following guidelines:

- Never make the size or area of the ductwork smaller than the size that originates at the hood.
- Bigger ductwork is better.
- Keep duct length less than 50 linear feet.
- Minimize use of elbows and transitions (4 or less).
- Always separate 90° elbows with at least 2 feet of straight ductwork.
- When using a remote exterior blower, using one 90° elbow will reduce noise transmission into the hood.
- Place transitions at least 1 foot from the hood outlet or remote blower inlet.

**Reversible Telescopic Flues:** Some Best® by Broan range hoods have louvers in the upper flue (see page 47) that allow recirculation of filtered exhaust back into the kitchen in non-ducted applications. The upper section of the flue is reversible so the louvers can be hidden when the hood is ducted to the outside. Note that in applications with 9' ceilings the louvers will be exposed regardless of flue orientation. If the exposed louver is undesirable, order the 10' flue extension (Contact our Technical Support Department for more information at 1-800-637-1453).

**Non-ducted Installations:** A non-ducted recirculating kit (NDK) or charcoal filter(s) is necessary when a hood is used in a non-ducted application (see page 50). The recirculating kit includes charcoal filter(s), a reducer ring and an air diverter box.

**Special Order Extension Flues:** If the standard chimney extension or soffit flue is not adequate for the ceiling height, custom sizes are available via special order.

**Special Order Timing:** Allow 12 to 16 weeks for special order items.

**Product Usage:** Best® by Broan range hoods are designed for use with indoor residential cooking products, except when noted for outdoor use, but are not for use with charcoal grills of any kind.

**Electrical Service:** 120 Volt service is required. Some Best by Broan range hoods are direct hook-up and some have pre-wired AC plugs (see page 50 for details).

**Technical/Installation Documentation:** Technical and installation documents are available online at [www.BestByBroan.com](http://www.BestByBroan.com), or through our Technical Support Department at 800-637-1453.



UL listed. (Underwriters Laboratories tested and approved).



Evaluated by UL to Canadian Standard C22.2 NO. 113.



P. O. Box 140, Hartford, WI 53027  
In U.S.A. call • 1-800-558-1711  
[www.BestByBroan.com](http://www.BestByBroan.com)

Best® by Broan reserves the right to change specifications at any time without notice.



0 26715 15801 0

\*\* Contact Technical Support prior to ordering: 1-800-637-1453.

\*\*\* K34 comes standard with a flue that will extend for a 10' ceiling application.

# MECHANICAL SPECIFICATIONS

Product	Blower		Performance			Electrical		Duct Type		Non-ducted Capability		Height Above Cooktop <sup>5</sup>		
Series	Category	Type	CFM <sup>1</sup>	Sones	HVI @ 120V	Amps	Connect.	Size <sup>2</sup>	Direction Flue <sup>3</sup>	Recirc. Kit <sup>4</sup>	Recirc.	8' ceiling	9' ceiling w/ flue ext.	10' ceiling <sup>6</sup>
Island														
IS102	INT.	Internal	1000	12	Y	6.3	Direct	8" Rd.	V	no	na	24"-27"	28"-30"	27"-30"
IEX102	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.9 Max	Direct	8" Rd.	V	no	na	24"-27"	28"-30"	27"-30"
IS502	INT.	Internal	450	8.5	Y	3.2	Direct	6" Rd.	V	no	na	24"-26"	30"	24"-30"
IS241/BER02IS	INT.	Internal	500	9	Y	3.2	Direct	6" Rd.	V	no	na	24"-27"	30"	27"-30"
IS170	INT.	Internal	450	8.5	Y	3.6	Direct	6" Rd.	V	Incl.	NDIS170	24"-26"	24"-30"	27"-30"
IEX170	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.9 Max	Direct	8" Rd.	V	no	na	24"-26"	24"-30"	27"-30"
ISER222	INT.	Internal	1000	10	Y	6.3	Direct	8" Rd.	V	no	na	24"	25"30"	27"-30"
IEX222	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.9 Max	Direct	8" Rd.	V	no	na	24"	25"-30"	27"-30"
IS42	INT.	Internal	1000	11.5	Y	6.3	Direct	8" Rd.	V	no	na	24"-27"	30"	27"-30"
IEX42	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.9 Max	Direct	8" Rd.	V	no	na	24"-27"	30"	27"-30"
IS23	INT.	Internal	500	8.5	Y	3.1	Direct	6" Rd.	V	Incl.	RD.FILTER	24"-27"	27"-30"	27"-30"
Chimney														
K7788	INT.	Internal	440	9	Y	3.2	Plug	6" Rd.	V	Incl.	NDK7780	24"-28"	25"-30"	24"-30"
KEX7788	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.5 Max	Direct	8" Rd.	V	no	na	24"-29"	25"-30"	24"-30"
K8087	INT.	Internal	450	9	Y	3.2	Plug	6" Rd.	V	Incl.	NDK7780	24"-29"	25"-30"	24"-30"
KEX8087	EXT	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.5 Max	Direct	8" Rd.	V	no	na	24"-29"	25"-30"	24"-30"
K7388	INT.	Internal	450	9	Y	3.2	Plug	6" Rd.	V	Incl.	NDK7388	24"-27"	24"-30"	26"-30"
K3500	INT.	Internal	450	9	Y	3.2	Plug	6" Rd.	V	no	na	24"-26"	30"	27"-30"
KEX3500	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.5 Max	Direct	8" Rd.	V	no	na	24"-26"	30"	27"-30"
K15	INT.	Internal	500	9.5	Y	3.2	Plug	6" Rd.	V	no	na	24"-27"	28"-30"	24"-30"
K273	INT.	Internal	500	9.5	Y	3.2	Plug	6" Rd.	V	no	na	24"-26"	24"-30"	26"-30"
KEX273	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.5 Max	Direct	8" Rd.	V	no	na	24"-26"	24"-30"	26"-30"
K3139	INT.	Internal	400	6	Y	2.7	Plug	6" Rd.	V	Incl.	NDK3139	24"-26"	28"-30"	25"-30"
K29	INT.	Internal	500	8	Y	3.6	Direct	6" Rd.	V	Incl.	FILTERK34	24"-25"	25"-30"	27"-30"
K30	INT.	Internal	500	8.5	Y	3.4	Plug	6" Rd.	V	no	na	24"-28"	28"-30"	27"-30"
KEX30	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.7 Max	Direct	8" Rd.	V	no	na	24" -28"	28"-30"	27"-30"
KER222	INT.	Internal	1000	10	Y	6.3	Direct	8" Rd.	V	no	na	24"-28"	26"-30"	24"-30"
KEX222	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.9 Max	Direct	8" Rd.	V	no	na	24"-28"	26"-30"	24"-30"
K42	INT.	Internal	1000	10	Y	6.3	Direct	8" Rd.	V	no	na	24"-27"	25"-30"	26"-30"
KEX42	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11		Y	6.5 Max	Direct	8" Rd.	V	no	na	24"-27"	25"-30"	26"-30"
K41	INT.	Internal	500	8	Y	3.2	Direct	6" Rd.	V	REKITK41F	RD. FILTER	24"-27"	25"-30"	27"-30"
K34	INT.	Internal	500	9.5	Y	3.2	Direct	6" Rd.	V	Incl.	FILTERK34	24"	24"-30"	26"-30"
Professional														
K260A	INT. or EXT.	Internal Exterior, Inline	See P6, P12 EB6, 9, 12, 15 or ILB3, 6, 9, 11	–	Y	6.0 Max	Direct	See Blower Selection	V & H	na	na	30"	30"	30"
K260D Outdoor	INT.	Internal	1200 (P12)	12	Y	5.8	Direct	10" Rd.	V	na	na	36"	36"	36"
K210A	INT. or EXT.	Internal Exterior, Inline	See P5, P8 EB6, 9, 12, 15 or ILB3, 6, 9, 11	–	Y	6.0 Max	Direct	See Blower Selection	–	na	na	24"-30" Minimum 20"	24"-30" with electric appliances	24"-30"
Built-In														
PIK	INT. or EXT.	Internal Exterior, Inline	See P5, P8 EB6, 9, 12, 15 or ILB3, 6, 9, 11	–	Y	6.0 Max	Direct	See Blower Selection	V	na	na	28"-34"	28"-34"	28"-34"
PIK33D Outdoor	INT. or EXT.	Internal Exterior	See P8D EB12, 15	10.5	Y	3.4	Direct	10" Rd.	V	na	na	40"	40"	40"
PK22	INT.	Internal	1000	10.5	Y	6.3	Direct	8" Rd.	V	na	na	24"-30"	24"-30"	24"-30"
PKEX2238	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11	–	Y	6.9 Max	Direct	8" Rd.	V	na	na	24"-30"	24"-30"	24"-30"
P1951M	INT.	Internal	400	8	Y	3.2	Direct	6" Rd.	V	Add Duct	RD.FILTER	24"-30"	24"-30"	24"-30"
P1952M	INT.	Internal	800	10	Y	5.9	Direct	8" Rd.	V	na	na	24"-30"	24"-30"	24"-30"
U102I	INT.	Internal	500	8	Y	3	Direct	8" Rd.	V	Add Duct	RD.FILTER	22½"-30"	22½"-30"	22½"-30"
U102E	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11	–	Y	6.9 Max	Direct	8" Rd.	V	na	na	22½"-30"	22½"-30"	22½"-30"
DD01	INT.	Internal	500	na	Y	6	Plug	3¼x10"	Down Left & Right	na	na	na	na	na
DDEX	EXT.	Exterior Inline	See EB6, 9, 12, 15 See ILB3, 6, 9, 11	–	Y	6.0 Max	Plug	3¼x14"	Down Left & Right	na	na	na	na	na

1. Blower	Vert. or Straight Through CFM	Horiz. or Right Angle CFM
P5	460	500
P6 (P8 only)	600	
P8 (P8D)	850	900
P12	1200	1200
EB6	600	
EB9	900	
EB12	1200	
EB12	1500	
ILB3	285	250
ILB6	625	600
ILB9	860	750
ILB11	1100	1000

See page 46 for more details on external and internal blowers.

- Damper/Adapter is included with the product in the duct size indicated.
- Recirculating Flues have vent openings that allow for non-ducted operation, which also may be exposed in ducted applications with 9' ceilings.
- Recirculating kits are necessary to make some models ready for non-ducted operation.
- Range of recommended mounting heights above the cooking surface (assumes cooktop to be 36" above

floor): The distance above a cooktop must not be less than 24". A maximum of 30" above the cooktop is highly recommended to maintain the best capture of cooking impurities. Distances over 30" are at the installer's and user's discretion.

6. For 10' ceiling Chimney and Island Hoods require optional flue extension.

+ The telescopic flue or device will allow installations at mounting heights greater than the indicated limit.





P. O. Box 140, Hartford, WI 53027  
In U.S.A. call • 1-800-558-1711  
[www.BestByBroan.com](http://www.BestByBroan.com)