

## 30" All Gas Range

### Model: HR 1124 G / HR 1124 LP



#### HR 1124 G / HR 1124 LP

##### Features:

- DirectSelect controls
- M Pro dual stacked burner system with TrueSimmer
- ComfortClean dishwasher-safe grates
- 5 Operating modes including Self-Clean
- Twin Convection fans
- Soft Open and Soft Close
- Clean Touch Steel™ front

#### SPECIFICATIONS

HR 1124 G — Item 25112451USA

HR 1124 LP — Item 25112452USA

Overall Unit Width	30" (762mm)
Overall Height	35½" — 37" (901.7mm — 939.8)
Overall Unit Depth to front of control panel	26½" (673mm)
Oven Door Clearance	22¾" (577mm)
<b>Niche</b>	
Minimum Cabinet Niche Width	30⅞" + ⅛" (763.5 — 765.1mm)
Minimum Cabinet Opening Height	35½" (901.7mm)
<b>Burners</b>	
Gas Burners:	(1) 12,000 BTU; (3) 19,000 BTU
<b>Electrical</b>	
Electrical Requirements	120V, 60Hz, 15 Amps
Power Cord	Yes - NEMA 5-15 plug, 5.5 ft. (167.6cm) long
<b>Shipping</b>	
Shipping Weight	337.3 lbs (153kg)
<b>Support</b>	
Call	800.843.7231
20/20	©2020technologies.com




# 30" All Gas Range

## Model: HR 1124 G / HR 1124 LP




### PRODUCT VIEWS

Isometric

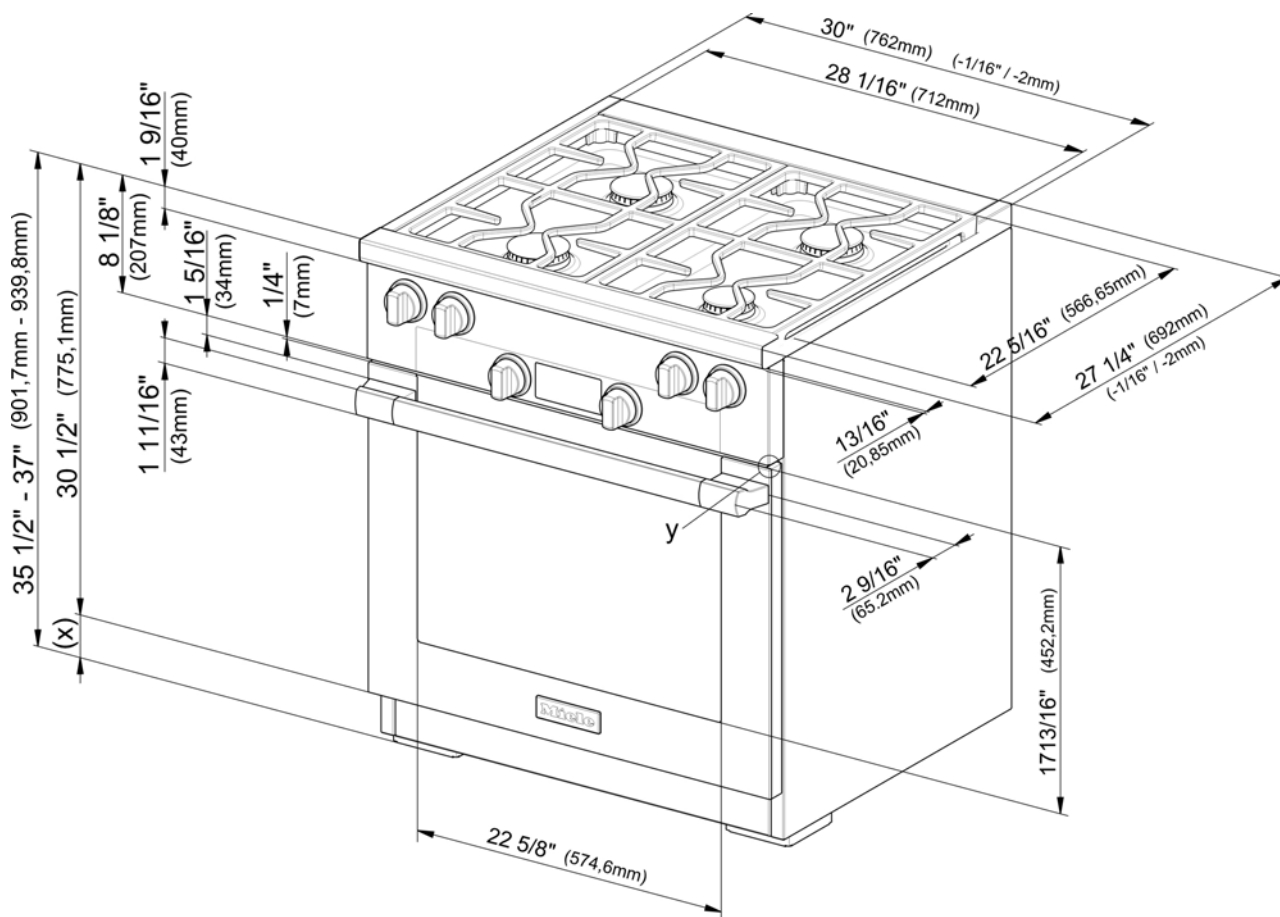

(x) = Toe-kick height adjustment 4" - 5 1/2" (101,6mm - 139,7mm)






# 30" All Gas Range

## Model: HR 1124 G / HR 1124 LP



### PRODUCT VIEWS

#### Rear View

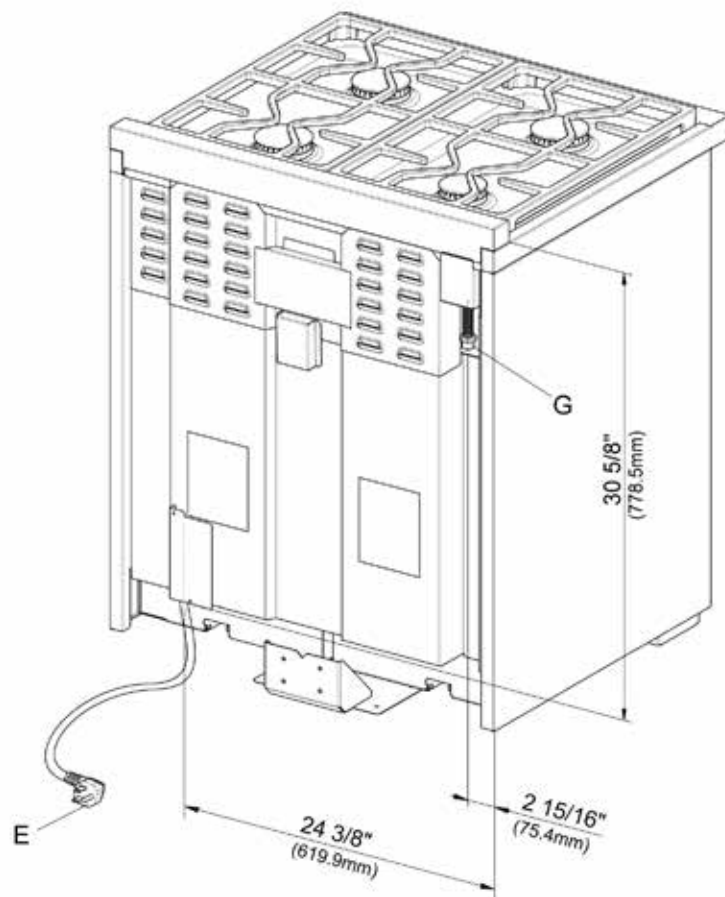

E = Electrical connection

G = Gas connection




# 30" All Gas Range

## Model: HR 1124 G / HR 1124 LP



### PRODUCT VIEWS

#### Detailed Side View

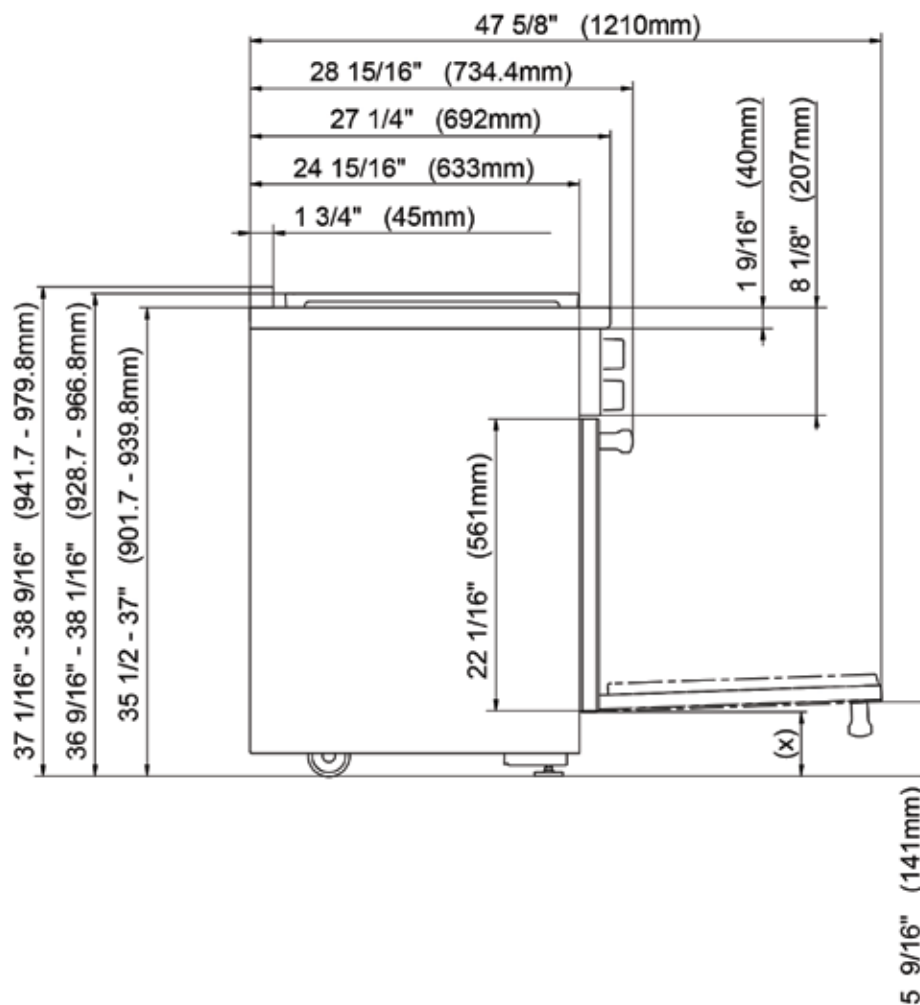

(x) = Depending on the appliance height adjustment: 4" - 5 1/2" (101.6 mm - 139.7 mm)




# 30" All Gas Range

## Model: HR 1124 G / HR 1124 LP



### PRODUCT VIEWS

#### Cabinet View

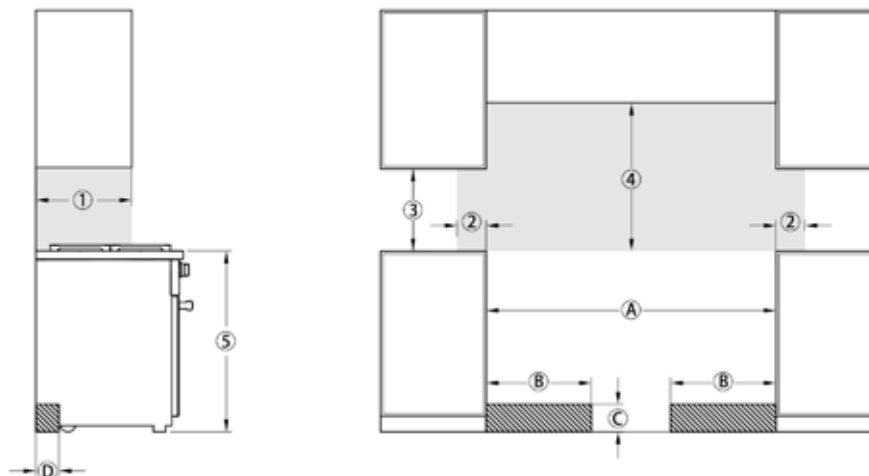

Position	Dimension [inches]	Description
①	13"	Maximum depth of top cabinet
②	6"	Minimum distance (left and right) to flammable surfaces
③	18"	Minimum distance to bottom edge of top cabinet
④	30"	Minimum distance between the top of the cooking area and the bottom of an unprotected wooden or metal cabinet
⑤	35 1/2"–37"	Distance from floor to cooktop surface
A	30 1/16" + 1/16"	Niche width
B	approx. 10 13/16" (274 mm)	Maximum connection width right and left
C	approx. 4 1/2" (115 mm)	Maximum connection height
D	approx. 2 13/16" (72 mm)	Maximum depth of connection

The gray areas represent the minimum distance from flammable surfaces.

The hatched areas represent the installation areas for the connections.

For island installations, 12" minimum distance from back of range to flammable rear wall above countertop.