

## 3018R • 18" Solid Door Refrigerator • Modular 3000 Series

### FEATURES & BENEFITS



STAINLESS  
SOLID



INTEGRATED  
SOLID

#### PERFORMANCE

- Volume of 3.4 cu ft holds up to 68 bottles (12 oz) or 104 cans (12 oz)
- Temperature range: 34°F -70°F
- Convection cooling system rapidly and efficiently takes items to the set temperature
- U-Select® Control offers five distinct modes: Beverage: 34°F - 65°F, Deli: 34°F - 40°F, Market: 34°F - 40°F, Pantry: 34°F - 70°F, Root Cellar: 45°F - 55°F
- U-Select® Control with digital OLED display is ergonomically located on top of door
- Maintains temperature to within 1°F of the set point to maximize preservation

#### INTERIOR/EXTERIOR

- Black interior is illuminated with LED theater lighting
- Three full-extension, slide-out drawers are removable for easy cleaning
- The middle bin has two possible positions and comes with a removable glass shelf to keep products stable
- The lower bin is large enough to fit 2 one-gallon containers with additional space for more storage
- Standard commercial stainless steel handle is interchangeable with professional handle accessory
- Must be ordered right-hand or left-hand hinged

#### INTEGRATION

- Robust, concealed and covered hinges with built-in door stop and closer
- Adjustable grille can be shifted front-to-back and up-and-down
- Integrated model requires ¾" custom door panel
- Grille can accept an overlay toe-kick
- Four independently adjustable leveling legs; rear legs are adjustable from the front for ease of installation

### MODEL DETAILS

| Model          | Voltage | Door Swing       | Finish           | Shipping Weight |
|----------------|---------|------------------|------------------|-----------------|
| U-3018RS-00A   | 115     | Right-Hand Hinge | Stainless Solid  | 124 lbs         |
| U-3018RS-01A   | 115     | Left-Hand Hinge  | Stainless Solid  | 124 lbs         |
| U-3018RINT-00A | 115     | Right-Hand Hinge | Integrated Solid | 120 lbs         |
| U-3018RINT-01A | 115     | Left-Hand Hinge  | Integrated Solid | 120 lbs         |


### ACCESSORIES

| Model                | Description                             | Finish    | Shipping Weight |
|----------------------|---|-----------|-----------------|
| 23074                | Professional Door Handle, 1 ¼" Diameter | Stainless | 2 lbs           |
| 23073                | Commercial Door Handle, 7/8" Diameter   | Stainless | 2 lbs           |
| U-3000FLANGE-KIT     | Flange Kit, 3000 Series                 | Black     | 14 lbs          |
| U-3000FLANGE-KIT-ICE | Flange Kit, 3000 Series, Ice**          | Black     | 17 lbs          |
| 80-33027-00          | 3k 18" Slide and Divide Bin Organizer   | na        | 2 lbs           |


## Modular 3000 Series • 18" Solid Door Refrigerator • 3018R

### DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" overlay panel/frame installed.

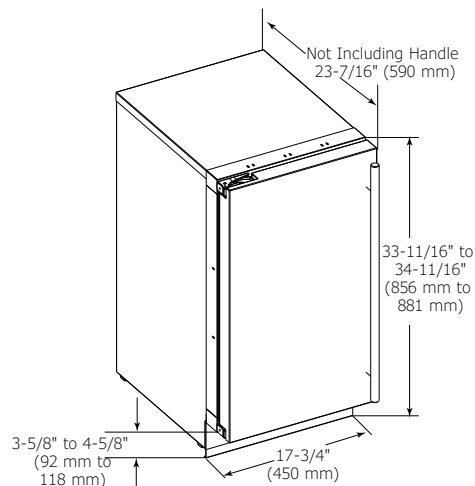

### CABINET CUT-OUT

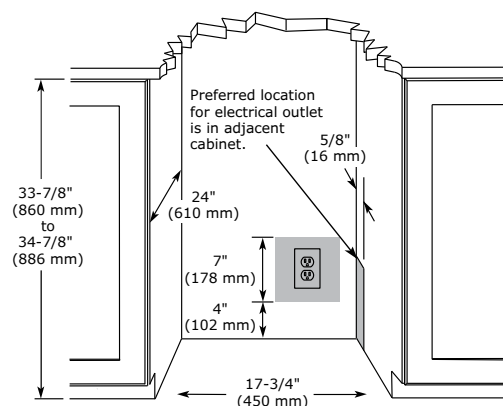

### INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.


No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

### SPECIFICATIONS

|                                   |                    |
|-----------------------------------|--------------------|
| Model                             | 3018R              |
| Amps: Running                     | 1.2                |
| Capacity: Bottle (12 oz)          | 68                 |
| Capacity: Can (12 oz)             | 104                |
| Capacity: Volume (cu ft)          | 3.4                |
| Control Type                      | U-Select®          |
| Dimensions: Product Depth         | 23 7/16" / 590 mm  |
| Dimensions: Product Height        | 33 11/16" / 856 mm |
| Dimensions: Product Width         | 17 3/4" / 450 mm   |
| Energy Consumption: Avg. Per Year | 245 kWh            |
| ENERGY STAR                       | ENERGY STAR        |
| Product Weight: Max               | 114 lbs            |
| Refrigerant Type                  | R600a              |
| Sabbath (Star K Certified)        | Yes                |
| Temperature Range                 | 34°F - 70°F        |

### COOLING SYSTEM



### ELECTRICAL REQUIREMENTS

This unit requires a grounded a polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Residential



Please visit [u-line.com](http://u-line.com) to view this model's User Guide. All specifications are subject to change without notice.