

## 1024WC • 24" Wine Captain® Model • 1000 Series

### FEATURES & BENEFITS



STAINLESS  
FRAME

#### PERFORMANCE

- Volume of 5.2 cu ft holds up to 48 wine bottles (750 ml)
- Mechanical Dial Control is conveniently located on the grille
- Temperature range: 40°F - 60°F
- Mechanical passive cooling system
- Relative humidity inside the unit is approx. 50%
- Rubber mounted compressor virtually eliminates vibration

#### INTERIOR/EXTERIOR

- White interior is illuminated with recessed incandescent lighting that automatically turns off when the door is closed
- Three-quarter extension zinc coated wine racks allow for easy access
- Wine racks accommodate a variety of bottle shapes and sizes, while the fourth and fifth racks allow for larger diameter wine and champagne bottles
- LowE coated, argon gas filled thermopane glass door provides protection from harmful UV light
- Standard commercial stainless steel handle is interchangeable with professional handle accessory
- Door swing is field reversible

#### INTEGRATION

- Unit is designed to be built-in or can be freestanding with the freestanding accessory kit
- Solid natural beech wood fronts on wine racks can easily be stained to match surrounding cabinetry
- Four independently adjustable leveling legs provide a precise undercounter fit

### MODEL DETAILS


Model	Voltage	Door Swing	Finish	Shipping Weight
U-1024WCS-00A	115	Field Reversible	Stainless Frame	133 lbs

### ACCESSORIES


Model	Description	Finish	Shipping Weight
23074	Professional Door Handle, 1 1/4" Diameter	Stainless	2 lbs
23073	Commercial Door Handle, 7/8" Diameter	Stainless	2 lbs
U-FSK-B	Freestanding Kit	Black	3 lbs

## 1000 Series • 24" Wine Captain® Model • 1024WC

### DIMENSIONS

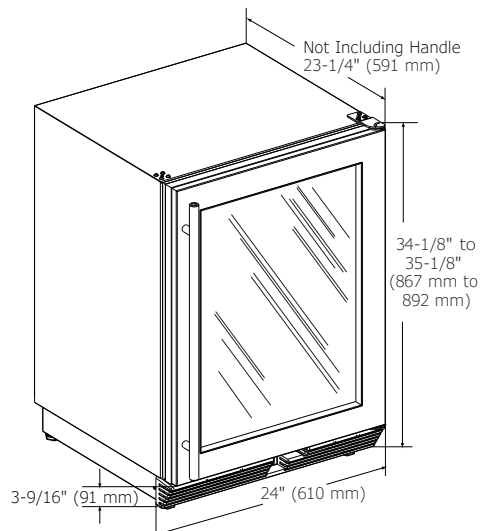

### CABINET CUT-OUT

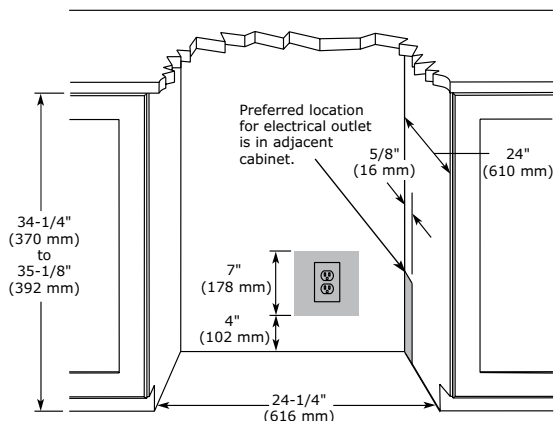

### INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.

Cutout includes the additional 1/4" width overall to ensure proper installation.

No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

### SPECIFICATIONS

Model	1024WC
Amps: Running	2.4
Capacity: Volume (cu ft)	5.2
Capacity: Wine Bottle (750 ml)	48
Control Type	Mechanical Dial
Dimensions: Product Depth	23 1/4" / 591 mm
Dimensions: Product Height	34 1/8" / 867 mm
Dimensions: Product Width	24" / 610 mm
Energy Consumption: Avg. Per Year	250 kWh
ENERGY STAR	na
Product Weight: Max	123 lbs
Refrigerant Type	R134a
Sabbath (Star K Certified)	No
Temperature Range	40°F - 60°F

### COOLING SYSTEM



### ELECTRICAL REQUIREMENTS

This unit requires a grounded a polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Residential