

# D5534XLFI

## Turbo Drying

Capacity (max): 14 Place settings

Upper basket type: Premium upper basket

Lower basket type: Exclusive lower basket

## Programs

Heavy wash

Normal programme

Delicate wash

Quick wash

Super quick

Eco wash

Rinse & Dry

Rinse and hold

Sanitation wash

## Options

Delayed start: 24 h

High temperature

Long dry

## Cleaning systems

Number of spray zones: 7

Self cleaning filters

AquaLevel™ Sensor

## Drying system

Turbo Drying™

## Features

8 stainless steel parts

Fault indication

Salt indication

Rinse-aid indication

Time remaining indicator

Voice signal for the end of washing cycle

## Safety

AquaSafe™

SteamSafe™

KidLock™ - lock the door

## Baskets

Upper basket type: Premium upper basket

Lower basket type: Exclusive lower basket

## General

Size: XL (ADA height compliant)

Mode of installation: Integrated

Display type: LED display

Number of programs: 9

Noise level: 48 dB(A)

Number of baskets: 2

Max loading height upper basket: 9 1/16 (230 mm)

Max loading height lower basket: 12 3/16 (310 mm)

Capacity (max): 14 Place settings

EAN code: 3838942521287



## Dimensions and installation

Height: 32 1/4 (819 mm)

Width: 23 5/8 (600 mm)

Depth: 22 7/8 (581 mm)

Packaging height: 35 13/16 (910 mm)

Packaging width: 25 3/16 (640 mm)

Packaging depth: 26 3/4 (680 mm)

Length inlet hose: 66 1/8 (1680 mm)

Length outlet hose: 41 3/4 (1060 mm)

Cord length: 46 7/16 (1180 mm)

Weight net: 108 lbs

Weight gross: 112 lbs

## Technical information

Connection rating: 1300 W

Current: 15 A

Voltage: 120 V

## Consumption

Estimated yearly energy consumption: 231 kWh

Energy consumption/cycle: 1,07 kWh

# D5534XLFI


## XL DISHWASHERS (ADA COMPLIANT) - PANEL READY

### UNIT DIMENSIONS

	U.S.	Metric
Height (Adjustable)*	32-1/4" to 34"	819 mm to 864 mm
Width	23-5/8"	600 mm
Depth (Includes high loop)	22-7/8"	581 mm
Depth w/Door Open	48-3/8"	1229 mm
Weight	108 lb	49 kg

### TECHNICAL DATA

Electricity	120V, 60Hz, 15 amp
Water pressure	4.2 - 140 psi, 0.03-1.0 MPa, 0.3-10 Bar
Heating element	1200 watt
Max loading	1300 watt

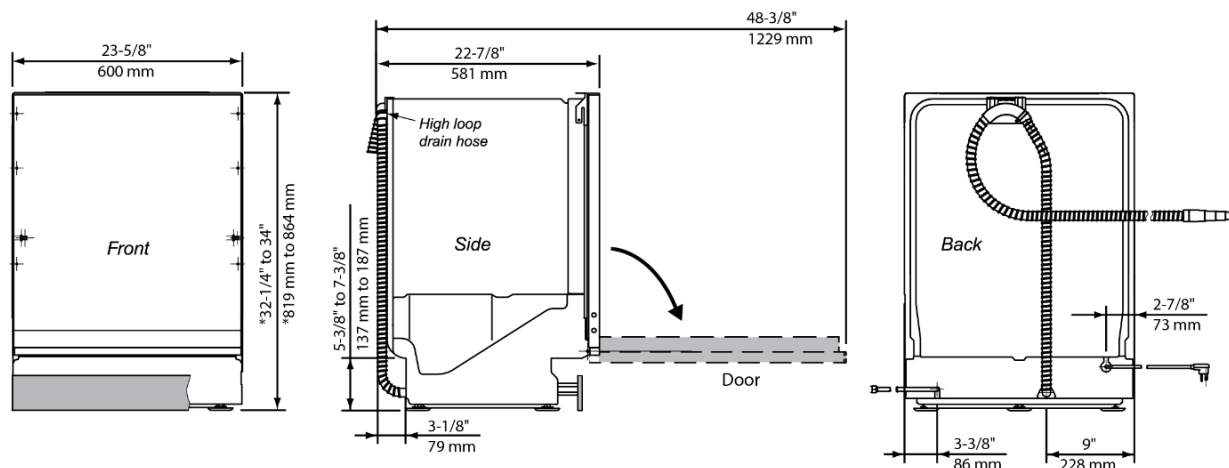

## PREPARING THE LOCATION

### CUTOUT DIMENSIONS


	U.S.	Metric
Height*	32-1/4" to 34"	819 to 864 mm
Width	23-5/8" to 24"	600 mm to 610 mm
Depth	24"	610 mm

The best place for your dishwasher is in the kitchen near the sink. This makes it easier to connect the water and drain supply lines.

A built-in dishwasher must be enclosed on the top, both sides and the back.

The power-supply receptacle for the appliance shall be installed in a cabinet or on a wall adjacent to the undercounter space in which the appliance is to be installed.

The electrical and water supplies should enter through the area indicated by the shading on the illustration at right. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 1-1/2" (38 mm) in diameter. If the partition is metal, it needs to be covered with an edge protector. Use caution when the appliance is installed or removed, to reduce the likelihood of damage to the power-supply cord.

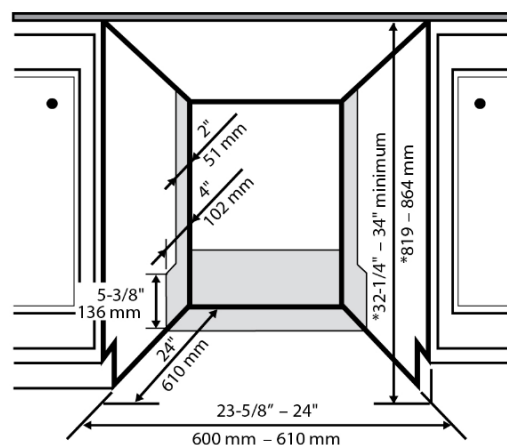

\* 32-1/4" (819 mm) height requires removal of top trim, and lowering side trim (2).

### PANEL DIMENSIONS

	U.S.	Metric
4" Toe kick		
Height	30-1/8"	765 mm
Width	23-7/8"	606 mm
6" Toe kick		
Height	28-1/8"	714 mm
Width	23-7/8"	606 mm