

FEATURES

- Stainless steel interior and exterior.
- Standard or flush installation, or free-standing option with accessory panels.
- Triple-pane, UV-resistant glass door—high altitude glass available.
- Handles coordinate with Wolf ranges.
- Dual refrigeration system with two compressors and three evaporators keeps food fresher longer.
- Microprocessor and interior touch control panel with exterior digital temperature display.
- Ceiling lighting in both upper cabinets with LED side lighting in refrigerator.
- Adjustable spill-proof glass shelves.
- Stainless steel slide-out bins fit neatly under refrigerator glass shelves.
- Touch-and-glide crisper drawer with tight-sealing clear cover.
- Interior drawer dividers can be used in either refrigerator drawer.
- Precision-built, auto-close door hinges.
- Easy-access flip-up grille.
- Automatic ice maker with advanced water filtration system.



MODEL	
Glass Door	648PROG


INTERIOR FEATURES

REFRIGERATOR (DOOR AND TWO DRAWERS)

- 3 Adjustable glass shelves
- 1 Stationary glass shelf
- 2 Adjustable stainless steel slide-out bins
- 1 Glass crisper lid
- Interchangeable drawer dividers

FREEZER (DOOR AND TWO DRAWERS)

- Automatic ice maker
- 3 Adjustable stainless steel shelves
- 1 Stationary stainless steel shelf
- Stainless steel ice bucket

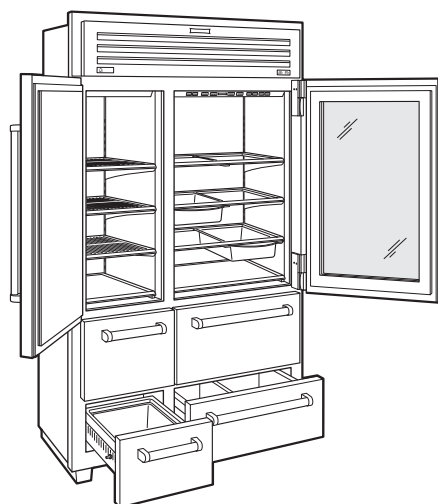

Model 648PROG



ACCESSORIES

- Stainless steel side panels and top for freestanding application.
- Stainless steel side panel.
- Stainless steel front and side kickplates.
- Stainless steel slide-out refrigerator bin.
- Refrigerator drawer dividers.
- 90° door stop.
- Replacement water filter.

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.



Slide-out bins.



Glass crisper lid.

SPECIFICATIONS

PRODUCT

Dimensions	48"W x 84"H x 24"D
Door Clearance	30 ³ / ₄ "
Weight	875 lb

CAPACITY

Refrigerator	18.5 cu ft
Freezer	11.7 cu ft

ELECTRICAL

Supply	115 VAC, 60 Hz
Service	15 amp circuit

PLUMBING


Supply	1/4" OD copper, braided stainless steel or PEX tubing
Pressure	35–120 psi

For standard installation, face frame of unit extends 2" beyond cabinetry. For flush installation, face frame is flush with surrounding cabinetry.


Specifications are subject to change without notice. Visit subzero.com/specs for the most up-to-date information.

Dimensions may vary $\pm 1/8"$ (3). Dimensions in parentheses are millimeters unless otherwise specified.


DIMENSIONS

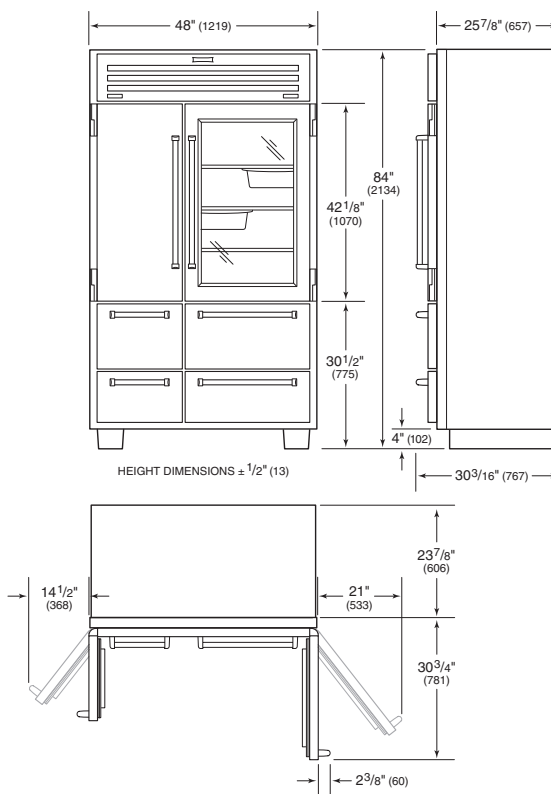


ELECTRICAL



PLUMBING



STANDARD INSTALLATION

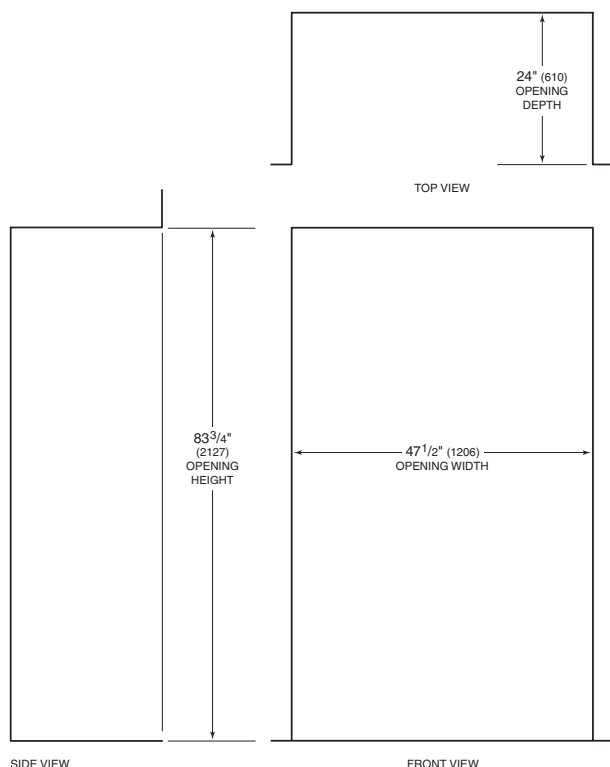

FLUSH INSTALLATION

