

## FEATURES

- Framed and unframed door styles with tubular handles.
- Crafted of heavy-duty stainless steel.
- Dual convection ovens with two fans for even heat distribution.
- Ten cooking modes—bake, roast, broil, convection, convection bake, convection roast, convection broil and proof—bake stone and dehydration modes require accessory.
- Wolf exclusive rotating glass touch control panel with independent oven displays.
- Cobalt blue porcelain oven interiors.
- Large viewing, triple-pane windows and dual halogen interior lights.
- Three adjustable oven racks; one full-extension easy glide, one full-extension door glide and one standard in each oven.
- Hidden bake elements and recessed broil elements.
- Temperature probe and broiler pan.
- Self-clean, delayed start, timed cook and Sabbath features.
- Wolf exclusive spring and damper door hinge system for smooth opening and closing.




| MODEL    |         |
|----------|---------|
| Framed   | DO30F/S |
| Unframed | DO30U/S |



Model DO30F/S



Model DO30U/S

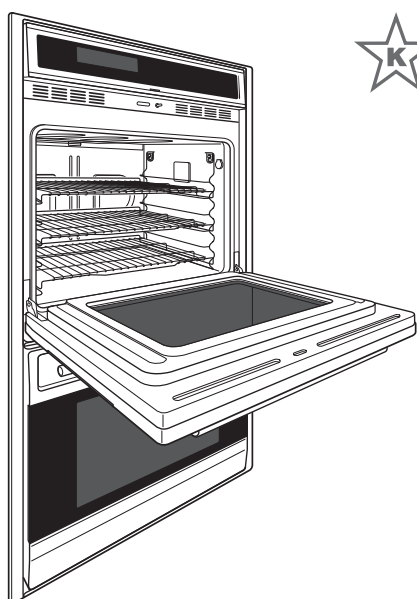

Model DO30U/S

## ACCESSORIES

- Bake stone kit (stone, rack and peel).
- Dehydration kit (racks and door stop).
- Set of three standard oven racks.
- Full-extension easy glide oven rack.
- 30" baking sheet.
- Temperature probe and broiler pan.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, [wolfappliance.com](http://wolfappliance.com).

## SPECIFICATIONS

### PRODUCT

|                |                                                 |
|----------------|-------------------------------------------------|
| Dimensions     | 29 <sup>7</sup> / <sub>8</sub> "W x 50"H x 24"D |
| Door Clearance | 20 <sup>3</sup> / <sub>4</sub> "                |
| Weight         | 466 lb                                          |

### OVEN INTERIORS

|                       |                                                 |
|-----------------------|-------------------------------------------------|
| Interior              | 25"W x 16 <sup>1</sup> / <sub>2</sub> "H x 19"D |
| AHAM Overall Capacity | 4.5 cu ft each                                  |
| AHAM Usable Capacity  | 2.8 cu ft each                                  |


### ELECTRICAL

|         |                    |
|---------|--------------------|
| Supply  | 240/208 VAC, 60 Hz |
| Service | 50 amp circuit     |
| Conduit | 4"                 |


Specifications are subject to change without notice. Visit [wolfappliance.com/specs](http://wolfappliance.com/specs) for the most up-to-date information.

Dimensions may vary  $\pm 1/8$ " (3). Dimensions in parentheses are millimeters unless otherwise specified.

## DIMENSIONS

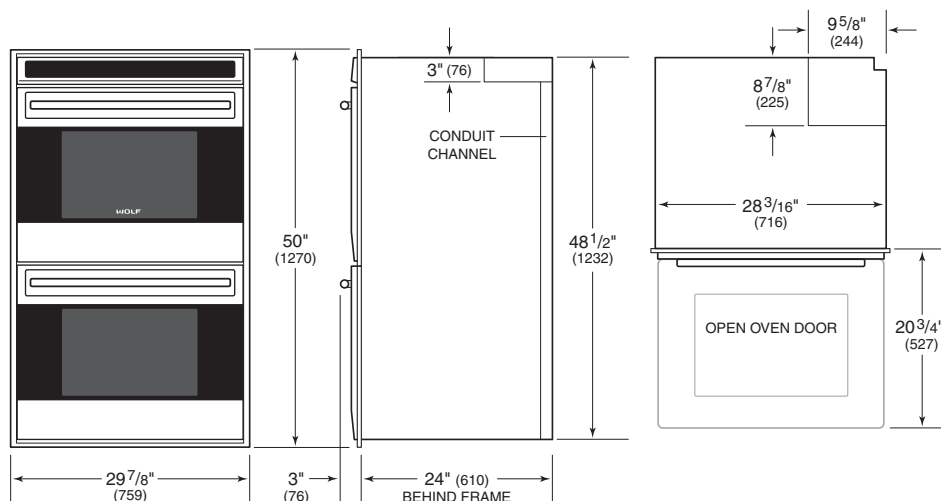

## INSTALLATION

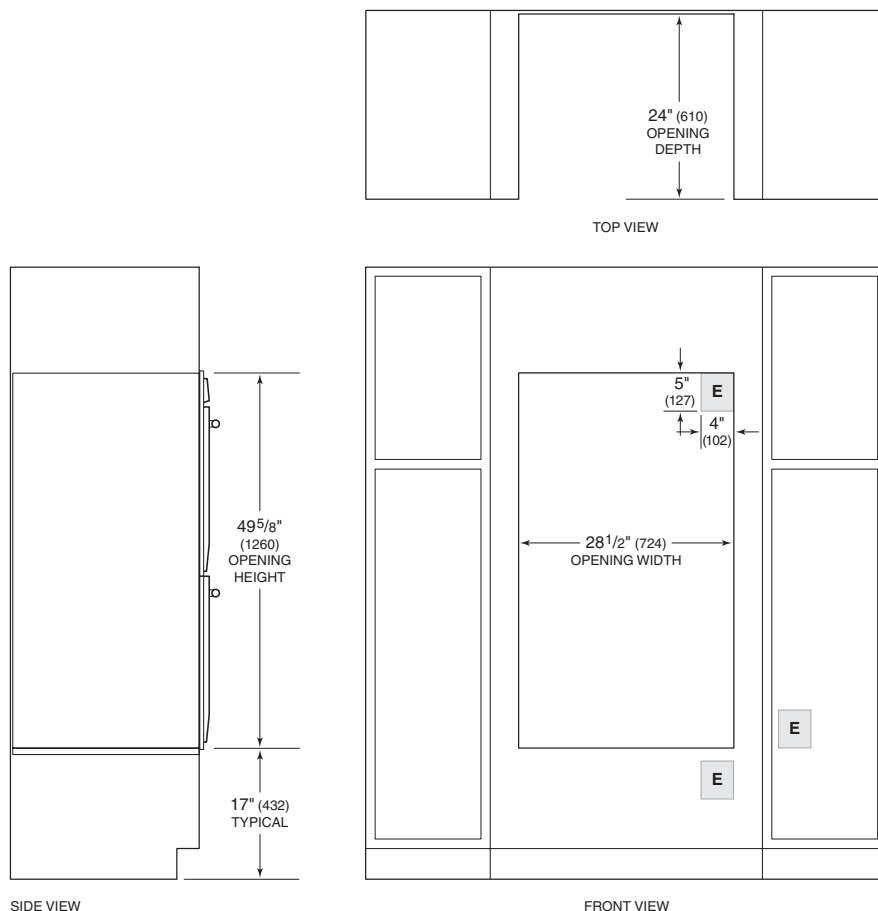

NOTE: Location of electrical supply within opening may require additional cabinet depth.