



Wall Ovens

The aroma of fresh-baked bread. The appeal of a perfectly roasted turkey. The texture of a light, delicate pastry. Nothing delights our senses more than the specialties likely to emerge from the wall oven of a truly creative cook. We believe that the Jenn-Air® wall oven is the right wall oven to encourage your creativity, with advanced performance features that make impressive results an everyday occurrence.

Which Jenn-Air advancement do we think you'll use the most? It's a toss-up between MultiMode® Convection and Auto Convection Conversion. MultiMode® Convection features six settings to deliver the ideal temperature, airflow and cooking cycle conditions for different types of food. Auto Convection Conversion automatically converts cook time and/or temperature from your recipes to the appropriate convection settings, taking the guesswork out of convection cooking. Together, they make it easy to achieve the results you envision.

You'll also find that the Jenn-Air® wall oven line is more versatile than ever, thanks to cooking combinations that include single and double wall ovens, microwave/wall oven combos, an exclusive convenience size wall oven, built-in microwaves and warming drawers – choices that enable you to create your ideal kitchen with ease.

INDULGE *your* SENSES.



SHOWN: JJW7530DDS 30" CONVENIENCE OVEN OVER JJW9530DDS 30" ELECTRIC SINGLE WALL OVEN WITH CONVECTION, JJC8130DDS 30" BUILT-IN MICROWAVE, JBL800 ATTREZZI™ PEARLIZED BLACK BLENDER WITH CLEAR PITCHER.

PRO-STYLE® WALL OVENS

Style choices include the Jenn-Air® Pro-Style® wall oven with a commercial finish, bold knobs and diamond etched handles for an improved grip.

MultiMode® Convection gives you precise control over results, no matter what you're cooking. Convection Bake, Roast, Broil, Pastry, Drying and Thaw & Serve settings deliver the ideal temperature, air flow and cooking cycle conditions for different types of food. That makes it easy to achieve evenly browned baked goods; moist, tender meats; and more – up to 25% faster when roasting than with the traditional cooking method. Drying enables you to dry fruits, herbs, flowers and vegetables at home, and Thaw & Serve gives you the proper setting for thawing ready-to-serve frozen foods.



30"/27" PRO-STYLE® ELECTRIC DOUBLE WITH CONVECTION

JJW9830DDP / JJW9827DDP

- Professional styling ► Exclusive menu-driven Smart Touch electronic controls with customization features ► MultiMode® convection in upper and lower oven ► Auto Convection Conversion
- CustomClean™ self-cleaning upper and lower oven ► Proofing, Cook & Hold, Favorite Settings and Keep Warm options
- Temperature probe for upper oven ► Hidden bake elements
- 8-pass broil elements ► Stainless steel towel bar handle with diamond etched grip ► Three racks including an EasyRack™ oven rack and a Create-A-Space™ half-rack in both ovens ► Available in Pro-Style® stainless steel design



30" PRO-STYLE® ELECTRIC SINGLE WITH CONVECTION JJW9530DDP

- Professional styling ► Exclusive menu-driven Smart Touch electronic controls with customization features ► MultiMode® convection ► Auto Convection Conversion ► CustomClean™ self-cleaning oven ► Proofing, Cook & Hold, Favorite Settings and Keep Warm options ► Temperature probe ► Hidden bake element ► 8-pass broil element ► Stainless steel towel bar handle with diamond etched grip ► Three racks including an EasyRack™ oven rack and Create-A-Space™ half-rack
- Available in Pro-Style® stainless steel design





SHOWN: JJW9830DDP 30" PRO-STYLE® ELECTRIC DOUBLE WALL OVEN WITH CONVECTION

WALL OVENS

Jenn-Air® double wall ovens offer twice the cooking space, along with the flexibility to cook items at different temperatures... simultaneously. Perfect for when you entertain, whether it's a few times a year or a few times a week! Special features for both our double and single wall ovens include:

MultiMode® Convection gives you precise control for gourmet results, no matter what you're cooking. Convection Bake, Roast, Broil, Pastry, Drying and Thaw & Serve settings deliver the ideal temperature, air flow and cooking cycle conditions for different types of food. That makes it easy to achieve evenly browned baked goods; moist, tender meats; and more – up to 25% faster when roasting than with the traditional cooking method. Drying enables you to dry fruits, herbs, flowers and vegetables at home, and Thaw & Serve gives you the proper setting for thawing ready-to-serve frozen foods.



30"/27" ELECTRIC DOUBLE WITH CONVECTION JJW9830DD / JJW9827DD

- Curved front styling ► Exclusive menu-driven Smart Touch electronic controls with customization features ► MultiMode® convection in upper and lower oven ► Auto Convection Conversion
- CustomClean™ self-cleaning upper and lower oven ► Proofing, Cook & Hold, Favorite Settings and Keep Warm options ► Temperature probe for upper oven ► Hidden bake elements ► 8-pass broil elements
- Stainless steel towel bar handles on all colors ► Three racks including an EasyRack™ oven rack and a Create-A-Space™ half-rack in both ovens
- Available in black or white floating glass and in stainless steel (shown)



30"/27" ELECTRIC DOUBLE WITH UPPER CONVECTION JJW9630DD / JJW9627DD

- Curved front styling ► Exclusive menu-driven Smart Touch electronic controls with customization features ► MultiMode® convection in upper oven ► Auto Convection Conversion
- CustomClean™ self-cleaning upper and lower oven ► Proofing, Cook & Hold, Favorite Settings and Keep Warm options ► Temperature probe for upper oven ► Hidden bake elements ► 8-pass broil elements
- Stainless steel towel bar handles on all colors ► Three racks including an EasyRack™ oven rack and Create-A-Space™ half-rack in upper oven
- Two racks including an Easy Rack™ oven rack in lower oven
- Available in black (shown) or white floating glass and in stainless steel



See pages 118-119 for complete features and specifications.

Flexible racking options bring added flexibility to your wall oven in an instant. The Create-A-Space™ half-rack converts from a full-width rack to a convenient half-rack, enabling you to fit side dishes into the oven without sacrificing space needed for larger items on the main rack. The EasyRack™ oven rack is designed with an opening at the front of the rack, making it easier to grasp and remove pans without handles such as cookie sheets, large baking pans and pizza stones.



*The preparation of
good food is merely
another expression
of art, one of the
joys of civilized living.*

DIONE LUCAS



Auto Convection Conversion takes the guesswork out of convection cooking for consistent, professional results. This convenient feature automatically converts cook time and/or temperature from conventional settings to the appropriate convection settings – saving you time and effort.

Exclusive Smart Touch Controls with customization features make it easy to get the most out of all your oven's functions. Intuitive, menu-driven controls make the oven easy to set and easy to customize to your cooking style. It even includes a "Help" feature to make the most sophisticated functions simple to operate.

This **Frameless, Curved Front style** features stainless steel towel bar handles that provide a sophisticated appearance, available in white, black or bisque floating glass and in stainless steel with black accents.




30"/27" ELECTRIC DOUBLE JJW8630DD / JJW8627DD

- Curved front styling
- Exclusive menu-driven Smart Touch electronic controls with customization features
- Upper and lower bake/broil ovens
- CustomClean™ self-cleaning upper and lower oven
- Cook & Hold, Favorite Settings and Keep Warm options
- Hidden bake elements
- 8-pass broil elements
- Stainless steel towel bar handles on all colors
- Two racks including an EasyRack™ oven rack in upper and lower oven
- Available in black, white or bisque (shown) floating glass and in stainless steel




This **Flush-To-Cabinet style** is a streamlined design in black or white with color-matching handles, or in sleek stainless steel with contrasting black handles.

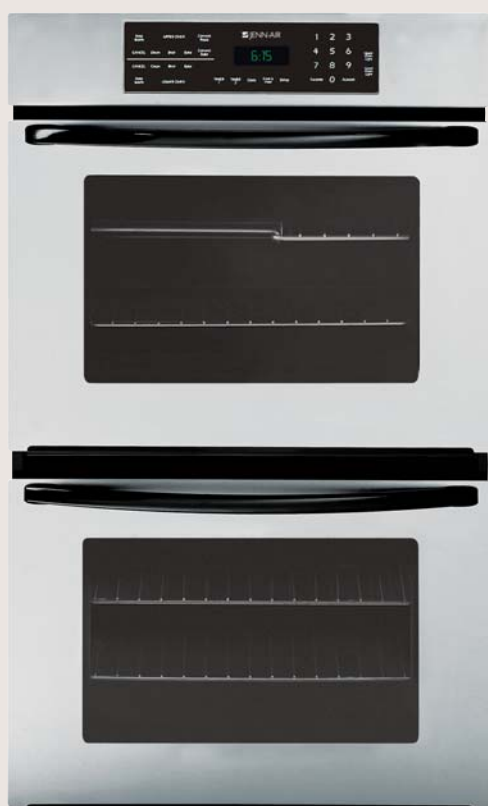

30" ELECTRIC DOUBLE WITH UPPER CONVECTION JJW9230DD

- Flush-to-cabinet design ► Electronic controls ► Upper Two-Mode Convection (Convect Bake/Convect Roast) and bake/broil oven ► Auto Convection Conversion ► Lower bake/broil oven ► CustomClean™ self-cleaning ovens with auto-lock ► Cook & Hold, and Favorite Setting options in upper oven ► Keep Warm option in upper and lower ovens
 - Six-Pass™ broil elements ► Variable temperature broiling
- Electronic clock with timer ► Create-A-Space™ half-rack in upper oven
 - Available in black or white with color-matching handles or in stainless steel with black handles

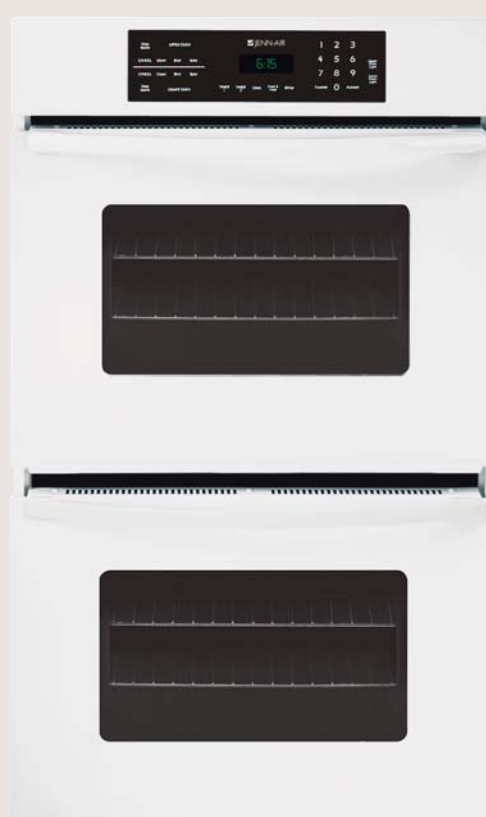

30" ELECTRIC DOUBLE JJW8230DD

- Flush-to-cabinet design ► Electronic controls ► Upper and lower CustomClean™ self-cleaning bake/broil ovens with auto-lock
- Cook & Hold, and Favorite Setting options in upper oven ► Keep Warm option in upper and lower ovens ► Six-Pass™ broil elements
 - Variable temperature broiling ► Electronic clock with timer
 - Available in black or white with color-matching handles or in stainless steel with black handles

WALL OVENS

Jenn-Air® single wall ovens bring superb performance, flexibility and style to any kitchen. Additional double and single wall oven features include:

Keep Warm setting utilizes a low temperature setting to keep food warm while you're waiting for guests to arrive or putting the finishing touches on the rest of the meal.

Cook & Hold setting gives you the freedom to step away from the oven without having to worry about overcooking food. The oven automatically adjusts to a Keep Warm setting for up to one hour once the preset cook time has expired – perfect when you're entertaining guests or attending to household activities.

Favorite settings ensure consistent results every time by allowing you to name, program and save the cook time, oven temperature and cooking method for up to 10 of your favorite recipes.

Hidden bake element/burner is located under the oven floor, providing a smooth surface that's easy to wipe clean. Design also allows for more usable space inside.

CustomClean™ self cleaning oven is a hassle free way to keep your oven sparkling clean by allowing you to set cleaning levels to match soil buildup.



30"/27" ELECTRIC SINGLE WITH CONVECTION JJW9530DD / JJW9527DD

- Curved front styling ► Exclusive menu-driven Smart Touch electronic controls with customization features ► MultiMode® convection ► Auto Convection Conversion
- CustomClean™ self-cleaning oven ► Proofing, Cook & Hold, Favorite Settings and Keep Warm options ► Temperature Probe ► Hidden bake element ► 8-pass broil element
- Stainless steel towel bar handle on all colors ► Three racks including an EasyRack™ oven rack and Create-A-Space™ half-rack ► Available in black or white floating glass and in stainless steel (shown)



30"/27" ELECTRIC SINGLE JJW8530DD / JJW8527DD

- Curved front styling ► Exclusive menu-driven Smart Touch electronic controls with customization features ► Bake/broil oven ► CustomClean™ self-cleaning oven
- Cook & Hold, Favorite Settings and Keep Warm options ► Hidden bake element ► 8-pass broil element ► Stainless steel towel bar handle on all colors ► Two racks including an EasyRack™ oven rack ► Rated # 1 by a leading consumer magazine
- Available in black, white (shown) or bisque floating glass and in stainless steel



Create-A-Space™ half-rack converts from a full-width rack to a convenient half-rack, enabling you to fit side dishes into the oven without sacrificing space needed for larger items on the main rack.

Easy Under Counter Installation allows a customized built-in look in the same amount of space as a 30" freestanding range. Just select the Jenn-Air® gas or electric cooktop of your choice that is approved for installation above the electric single wall oven.



30" ELECTRIC SINGLE WITH CONVECTION JJW9130DD

- Flush-to-cabinet design ► Electronic controls ► Two-Mode convection (Convect Bake/Convect Roast) and bake/broil oven ► Auto Convection Conversion
- CustomClean™ self-cleaning oven with auto-lock ► Cook & Hold, Keep Warm and Favorite Setting options ► Six-Pass™ broil element ► Variable temperature broiling
- Electronic clock with timer ► Under-counter or in-wall installation
- Create-A-Space™ half-rack ► Available in black or white with color-matching handles or in stainless steel with black handle



30" ELECTRIC SINGLE JJW8130DD

- Flush-to-cabinet design ► Electronic controls
- CustomClean™ self-cleaning bake/broil oven with auto-lock
- Cook & Hold, Keep Warm and Favorite Setting options
- Six-Pass™ broil element ► Variable temperature broiling
- Electronic clock with timer ► Under-counter or in-wall installation ► Available in black or white with color-matching handles or in stainless steel with black handle



30" GAS SINGLE JGW8130DD

- Flush-to-cabinet design ► Electronic controls ► Bake/broil oven ► CustomClean™ self-cleaning oven ► Cook & Hold, Favorite Setting and Keep Warm options ► Electronic ignition
- Convertible to LP ► Two standard racks ► Color-matching contoured handle ► Available in black or white

WALL OVEN COMPLEMENTS

Jenn-Air® products offer a variety of options that enable you to customize your kitchen to fit your cooking style. The exclusive **Jenn-Air® convenience oven** provides excellent baking, broiling and toasting results in a more compact space. A **Jenn-Air™ warming drawer** enables you to keep menu items warm and at the ideal texture until you're ready to serve them. Both are versatile enough to be used in the kitchen, rec room, bar area or wherever you entertain guests, and are designed to coordinate beautifully with our complete line of wall ovens, microwave/wall oven combos and built-in microwaves.



30" CONVENIENCE OVEN JJW7530DD

- Curved front styling ➤ Electronic touch oven controls
- Bake/broil/toast oven ➤ CustomClean™ self-cleaning oven
- Cook & Hold, Keep Warm and Favorite Setting options
- Oven rack designed for toasting ➤ 4-pass broil element
 - Stainless steel towel bar handle on all colors
- Available in black or white floating glass and in stainless steel



30" WARMING DRAWER JWD7030CDX

(shown with white front)

- Curved front styling ➤ Capacity to hold up to four, 11" plates
 - 82° F – 210° F variable temperature control with pre-set Proof, Low, Medium, High settings ➤ 1 to 4 hour Auto-Off timer ➤ "Continuous On" option ➤ Moist/Crisp variable moisture control ➤ Available in black or white floating glass and in stainless steel and Pro-Style™ design
 - Custom Panel Kit available to match warming drawer with cabinetry

See pages 50-51 for more details on Convenience Oven and Warming Drawers.



SHOWN: JJW7530DD 30" CONVENIENCE OVEN,
2 JWD7030CDX 30" WARMING DRAWERS WITH
JWD7130DD DRAWER FRONT

SMART COMBINATIONS

Combine a Jenn-Air® Convenience Oven with other Jenn-Air® ovens for many versatile cooking applications and a completely customized look. The compact size of the Convenience Oven allows you to enjoy the benefits of a conventional wall oven, in a much smaller space. And the built-in design coordinates beautifully with other Jenn-Air® appliances. A Jenn-Air® Convenience Oven above two Jenn-Air® Warming Drawers (shown at left) is perfect for efficient baking while you warm appetizers in one warming drawer and dinner plates in the other! Or choose a Jenn-Air® Convenience Oven placed above a Jenn-Air® Electric Single wall oven (shown at right) to create the perfect cooking duo in one convenient location.

WALL OVENS



Shown: JJW7530DDS 30" CONVENIENCE OVEN OVER JJW9530DDS 30"
ELECTRIC SINGLE WALL OVEN WITH CONVECTION

MICROWAVE/WALL OVEN COMBOS

Keypad controls on microwave provide more precise time and temperature settings for effortless results. Just press the power level desired on the number pad, and the precise time

when using the timer. There's no need to scroll up or down to get to the proper setting.



30"/27" MICROWAVE/OVEN WITH CONVECTION JMW9530DA / JMW9527DA

- Curved front styling ► Upper 1.5 cu. ft. 1000 watt microwave with stainless steel interior and glass turntable ► Drop-down microwave door with stainless steel towel bar handle ► Exclusive menu-driven Smart Touch electronic oven controls with customization features ► MultiMode® convection ► Auto Convection Conversion ► CustomClean™ self-cleaning oven ► Proofing, Cook & Hold, Favorite Settings and Keep Warm options ► Hidden bake element ► 8-pass broil element ► Stainless steel towel bar handle on all colors ► Three racks including an EasyRack™ oven rack and Create-A-Space™ half-rack
 - Available in black or white floating glass and in stainless steel
- (Not available in Canada)



30"/27" MICROWAVE/OVEN JMW8530DA / JMW8527DA

- Curved front styling ► Upper 1.5 cu. ft. 1000 watt microwave with stainless steel interior and glass turntable ► Drop-down microwave door with stainless steel towel bar handle ► Exclusive menu-driven Smart Touch electronic oven controls with customization feature ► CustomClean™ self-cleaning oven ► Cook & Hold, Favorite Settings and Keep Warm options ► Hidden bake element ► 8-pass broil element ► Stainless steel towel bar handle on all colors ► Two racks including an EasyRack™ oven rack ► Available in black, white or bisque floating glass and in stainless steel (shown)
- (Not available in Canada)

One-touch pre-programmed convenience selections make it easy to cook favorites at the touch of a button.

Glass turntable rotates to ensure even heat distribution and thorough cooking.



30" MICROWAVE/OVEN WITH CONVECTION

JMW9130DA

► Flush-to-cabinet design ► Upper 2.1 cu. ft. 1100 watt microwave with glass turntable ► Electronic controls ► Two-Mode Convection (Convect Bake/Convect Roast) and bake/broil oven ► Auto Convection Conversion ► CustomClean™ self-cleaning oven with auto-lock ► Cook & Hold, Keep Warm and Favorite Setting options ► Six-Pass™ broil element ► Variable temperature broiling ► Electronic clock with timer ► Create-A-Space™ half-rack ► Available in black or white with color-matching oven door handle or in stainless steel with black oven door handle

(Not available in Canada)



30" MICROWAVE/OVEN

JMW8130DA

► Flush-to-cabinet design ► Upper 2.1 cu. ft. 1100 watt microwave with glass turntable ► Electronic controls ► CustomClean™ self-cleaning bake/broil oven with auto-lock ► Cook & Hold, Keep Warm and Favorite Setting options ► Six-Pass™ broil element ► Variable temperature broiling ► Electronic clock with timer ► Create-A-Space™ half-rack ► Available in black or white with color-matching oven door handle or in stainless steel with black oven door handle

(Not available in Canada)



30"/27" BUILT-IN MICROWAVE JMC8130DD / JMC8127DD

- Curved front styling ► 1.5 cu. ft. capacity ► 1000 watts ► Stainless steel interior and glass turntable ► Ten power levels ► Pre-programmed auto sensor microwaving
- Scrolling VFD display with clock ► Drop-down door with stainless steel towel bar handle on all colors ► Built-in installation only, no trim kit required ► May be installed above Jenn-Air 27" or 30" single electric wall ovens ► Not for use above a gas wall oven ► Available in black, white or bisque floating glass and in stainless steel (shown)

MICROWAVES

The convenience, ease-of-use and stylish appearance of a Jenn-Air® microwave oven make it an integral part of a complete Jenn-Air® kitchen. Or consider placing one in a den or great room so you can easily enjoy tasty snacks, warm drinks, or a quick meal while you're listening to music, working on the computer or watching your favorite TV show or movie.

Auto Sensor Microwaving uses a built-in humidity sensor to accurately determine the correct cooking time and power level for the food. A variety of popular foods have been preprogrammed for easy microwaving.

Convection utilizes an added element and fan to evenly distribute heated air throughout the microwave oven cavity. This circulating air creates a consistent temperature around the food, eliminating hot and cold spots. This results in even browning of foods, as well as tender, juicy meats and poultry. The Jenn-Air® Microwave with Convection may be used to cook foods using microwave only, convection only, or by combining the advantages of convection and microwave cooking together.



BUILT-IN/COUNTERTOP MICROWAVE WITH CONVECTION JMC9158AA (trim kit available)

- 1.5 cu. ft. capacity ► 1000 watts ► Ten power levels ► Pre-programmed auto sensor microwaving ► Scrolling VFD display with clock ► In-wall installation ► Countertop installation ► May be installed above Jenn-Air® single electric wall oven (27" AST2780 and 30" AST3080 trim kit accessory available) ► Not for use above a gas wall oven ► Available in black, white, bisque or stainless steel with black accents (shown)
- (Not available in Canada)



30" OVER-THE-RANGE MICROWAVE JMV8208AA

- 2.0 cu. ft. capacity ► 1100 watts ► 10 power levels ► Pre-programmed dual distribution auto-sensor microwaving ► Scrolling VFD display with clock ► Halogen below-oven work surface light ► 5-level built-in exterior exhaust system with automatic time set (preset for recirculating ventilation) ► Available in black (shown), white, bisque or stainless steel with black accents

Cookery is not chemistry. It is an art. It requires instinct and taste rather than exact measurements.

MARCEL BOULESTIN



SINGLE ELECTRIC WALL OVENS

SINGLE ELECTRIC WALL OVEN FEATURES AND SPECIFICATIONS								
MODEL #	27"		30"					
	JJW 8527DD	JJW 9527DD	Convenience Oven		JJW 7530DD	JJW 8130DD	JJW 8530DD	Pro-Style® JJW 9530DDP
Overall Height (in)	29 ½	29 ½	23 ⅙	28 ¼	29 ½	28 ¼	29 ½	29 ½
Overall Width (in)	26 ¾	26 ¾	29 ¾	29 ¾	29 ¾	29 ¾	29 ¾	29 ¾
Overall Depth* (in)	25 ½	25 ½	25 ½	24 ⅙	25 ½	24 ⅙	25 ½	25 ⅔
Cutout Height (in)	29 ⅙	29 ⅙	22 ⅞	27 ⅙	29 ⅙	27 ⅙	29 ⅙	29 ⅙
Cutout Width (in)	25 ½	25 ½	28 ½	28 ½	28 ½	28 ½	28 ½	28 ½
Cutout Depth (in)	24 min.	24 min.	24 min.	24	24 min.	24	24 min.	24 min.
Oven Interior Height (in)	14 ¾	14 ¾	4	15	16 ½	15	16 ½	16 ½
Oven Interior Width (in)	21	21	19 ⅙	23 ½	23	23 ½	23	23
Oven Interior Depth (in)	18 ½	18 ½	18 ¼	18 ½	18 ¾	18 ½	18 ¾	18 ¾
Oven Capacity (cu. ft.)	3.3	3.3	1.2	3.8	4.0	3.8	4.0	4.0
Total Connected Load-KW @ 240V (see chart below)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Jenn-Air Platinum Warranty	•	•	•	•	•	•	•	•
Oven Features								
Two-Speed Convection with Convection Element		•				•	•	•
MultiMode® Convection ^A		•					•	•
Two-Mode Convection ^A (Convect Bake/Convect Roast)						•		
Bake/Broil Oven with Variable Temperature Broiling	•	•		•	•	•	•	•
Bake/Broil/Toast Oven with Variable Temperature Broiling			•					
Hidden Bake Element	•	•			•		•	•
8-Pass Recessed Broil Element					•		•	•
8-Pass Semi-Recessed Broil Element	•	•						
6-Pass™ Broil Element				•		•		
4-Pass Broil Element			•					
Closed-Door Broiling	•	•			•		•	•
Porcelain Broil Pan	•	•	•	•	•	•	•	•
CustomClean™ Self-Cleaning w/ Automatic Lock	•	•	•	•	•	•	•	•
Heavy-Duty Oven Racks ^B	2	3	1	2	2	3	3	3
Create-A-Space™ Half-Rack		•				•	•	•
Automatic Light	•	•	•	•	•	•	•	•
Control Features								
Smart Touch Electronic Controls with Prompts	•	•			•		•	•
Electronic Controls			•	•		•		
Electronic Clock with Timer(s)	2 Timers	2 Timers	1 Timer	1 Timer	2 Timers	1 Timer	2 Timers	2 Timers
Automatic Convection Conversion ^C		•				•	•	•
Favorite Settings Memory Option ^D	•	•	•	•	•	•	•	•
Cook & Hold Option ^E	•	•	•	•	•	•	•	•
Delay Start Cooking and Cleaning	•	•	•	•	•	•	•	•
Bread Proofing Feature ^F		•				•	•	•
Keep Warm Feature	•	•	•	•	•	•	•	•
Programmable Food Temperature Probe		•					•	•
Control Lockout	•	•	•	•	•	•	•	•
Control Setup Options ^G	•	•			•		•	•
Sabbath Mode	•	•	•	•	•	•	•	•
Exterior Features								
Stylish Frameless Curved Design	•	•	•		•		•	
Pro-Style® Model with Professional Styling								•
Flush-to-the Cabinet Design	•	•	•	•	•	•	•	•
Floating Glass-Front Door	•	•	•		•		•	
Extra-Large Panaview™ Window	•	•	•	•	•	•	•	•
Contoured Towel Bar Handle ^H				•		•		
Stainless Steel Towel Bar Handle	•	•	•		•		•	•
In-Wall or Undercounter Installation	In-Wall	In-Wall	•	•	•	•	•	•
*Color Indicators (add to end of model number) B=Black, W=White, Q=Bisque, S=Stainless Steel, P=Pro-Style® Stainless Steel	B,W,Q,S	B,W,S	B,W,S	B,W,S	B,W,Q,S	B,W,S	B,W,S	P
Available in Canada	•	•	•	•	•	•	•	•
Approximate Shipping Weight (lbs./kg)	163 / 74	165 / 75	160 / 73	140/63	173 / 79	140/63	175 / 79	172 / 78

- Feature Included
 - * Excluding oven door handle. Add approximately 2 ¼" for door handle.
- A. MultiMode® convection selections include Convect Bake, Convect Roast, Convect Broil and Convect Pastry. Convection air is also used with the Drying and Thaw & Serve options. Model JJW9130DD also has a drying option. For drying, an optional high-quality mesh drying rack is available as an accessory. Order model #DRYINGRACK.
- B. Oven models JJW8527DD and JJW8530DD have one EasyRack™ oven rack and one off-set rack. Oven models JJW9530DD and JJW9530DDP have one EasyRack™ oven rack, one offset rack and one Create-A-Space™ half rack which is a full-width oven rack that may be converted to a half-rack. Oven model JJW9527DD has one EasyRack™ oven rack, one offset rack and one Create-A-Space™ half rack. Convenience oven model JJW7530DD has one oven rack specially designed for toasting. Oven model JJW8130DD has two standard oven racks. Oven model JJW9130DD has two standard oven racks and a Create-A-Space™ half-rack.
- C. The Automatic Convection Conversion option takes the guesswork out of convection cooking by automatically converting standard cooking temperature/time to the correct settings for convection cooking.
- D. The Favorite Setting option ensures consistent results every time by allowing you to name, program and save the cook time, oven temperature and cooking method for up to 10 of your favorite recipes. Oven models JJW8130DD, JJW9130DD and convenience oven model JJW7530DD has memory for one Favorite Setting.
- E. The Cook & Hold option keeps food warm for up to one hour after the cook time has expired. The oven automatically turns off after the one hour Hold time has expired.
- F. Jenn-Air® wall ovens with convection offer a Bread Proofing feature that provides a controlled environment for proofing or allowing yeast bread products to rise in the oven prior to baking. Two methods are provided – Standard Proofing and Rapid Proofing.
- G. The Setup pad on the wall oven control panel lets the user customize several oven functions and features. These include, but are not limited to, language option of English, French or Spanish, Fahrenheit or Celsius temperature display, and an Energy Saver option that allows the control display to go dark when the oven is not in use.
- H. White and black models have color-matching handles. Stainless steel models have black handles.


All Jenn-Air® appliances are appropriately UL, AGA, CSA or CGA approved.

CIRCUIT PROTECTION SPECIFICATION GUIDE

Recommended Minimum		
K.W. Rating	Circuit Protection	Wire Size
On Serial Plate	In Amperes	AWG
0 – 4.8	20	12
4.9 – 6.9	30	10
7.0 – 9.9	40	8
10.0 – 11.9	50	8
12.0 – 14.9	60	6

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

30"/27" SINGLE WALL OVEN DIMENSION DIAGRAMS

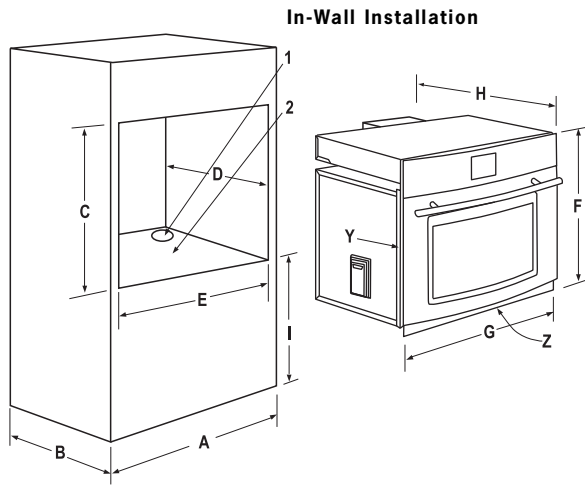

27" JJW9527DD, JJW8527DD		
●	DESCRIPTION	
1	1 1/4" dia. conduit access hole*	
2	3/8" plywood floor (must support 200 lbs)	
■	DIMENSIONS	
	in	cm
A	27 min.	68.58
B	24 min.	60.96
C	29 1/6 ± 1/6	73.81
D	24 min.	60.96
E	25 1/2 ± 1/6	64.77
F	29 1/2	74.93
G	26 3/4	67.95
H**	25 1/2	64.77
I	4 to 31	10.20 to 78.7
▲	NOTES	
Y	Allow for 1/4" trim overlap on each side.	
Z	Do not block air exhaust slots along bottom of oven.	

* Hole must be cut as close to corner of cabinet as possible.

** Excluding door handle.

These appliances have been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194°F. If these appliances are installed with cabinets that have a lower working temperature than 194°F, discoloration, delamination or melting may occur.

Electrical Requirements: Provide for 120/240 or 120/208 VAC, 60 Hz. See serial plate on front of unit for power requirements.

These appliances have been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194°F. If these appliances are installed with cabinets that have a lower working temperature than 194°F, discoloration, delamination or melting may occur.


Electrical Requirements: Provide for 120/240 or 120/208 VAC, 60 Hz. See serial plate on front of unit for power requirements.

IMPORTANT: Cutout Dimensions Are Critical. Refer to installation instructions packaged with product BEFORE making cutouts.

30" JJW9530DD, JJW8530DD			PRO-STYLE® OVEN		
●	DESCRIPTION		●	DESCRIPTION	
1	1 1/4" dia. conduit access hole*		1	1 1/4" dia. conduit access hole*	
2	3/8" plywood floor (must support 200 lbs)		2	3/8" plywood floor (must support 200 lbs)	
■	DIMENSIONS		■	DIMENSIONS	
	in	cm		in	cm
A	30 min.	76.20	A	30 min.	76.20
B	24 min.	60.96	B	24 min.	60.96
C	29 1/6 ± 1/6	73.81	C	29 1/6 ± 1/6	73.81
D	24 min.	60.96	D	24 min.	60.96
E	28 1/2 ± 1/6	72.39	E	28 1/2 ± 1/6	72.39
F	29 1/2	74.93	F	29 1/2	74.93
G	29 3/4	75.57	G	29 3/4	75.57
H**	25 1/2	64.77	H**	25 3/32	65.33
I	4 to 31	10.20 to 78.7	I	4 to 31	10.20 to 78.7
NOTES			NOTES		
Y	Allow for 1/4" trim overlap on each side.		Y	Allow for 1/4" trim overlap on each side.	
Z	Do not block air exhaust slots along bottom of oven.		Z	Do not block air exhaust slots along bottom of oven.	

* Hole must be cut as close to corner of cabinet as possible.

** Excluding door handle.

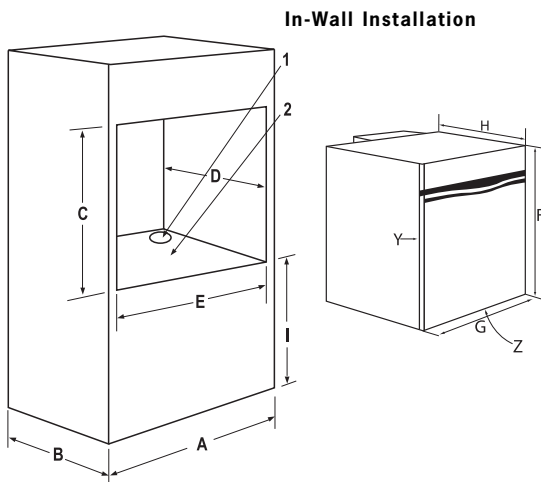

30" JJW8130DD, JJW9130DD		
●	DESCRIPTION	
1	1 1/4" dia. conduit access hole*	
2	3/8" plywood floor (must support 142 lbs)	
■	DIMENSION	
	in	cm
A	30 min.	76.20
B	24 min.	60.96
C	27 7/8 ± 1/6	70.80 ± 1/6
D	24 min.	60.96
E	28 1/2 ± 1/6	72.39
F	28 1/4	71.80
G	29 3/4	75.57
H**	24 1/6	62.1
I	4 to 33	10.20 to 83.8
NOTES		
Y	Allow for 1/4" trim overlap on each side.	
Z	Do not block air exhaust slots along bottom of oven.	

* Hole must be cut as close to corner of cabinet as possible.

** Excluding door handle.


These appliances have been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194°F. If these appliances are installed with cabinets that have a lower working temperature than 194°F, discoloration, delamination or melting may occur.

Electrical Requirements: Provide for 120/240 or 120/208 VAC, 60 Hz. See serial plate on front of unit for power requirements.

SINGLE ELECTRIC WALL OVENS

30" SINGLE WALL OVEN DIMENSION DIAGRAMS

Under-the-Counter Installation Side and/or top fillers may be necessary if unit is positioned between existing cabinets. Be sure they are attached securely, since they will anchor the oven in the cabinet.

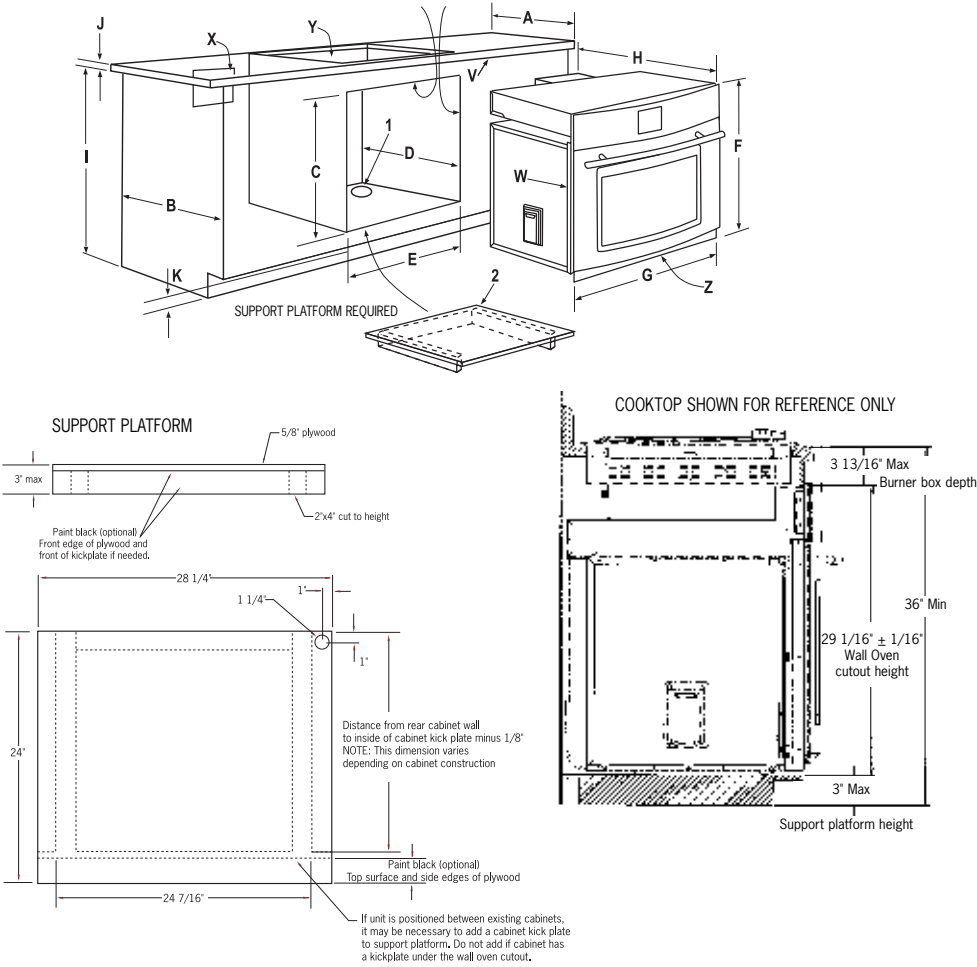

30" JJW9530DD, JJW8530DD

DESCRIPTION		
1	1 1/4" dia. conduit access hole*	
2	3/8" plywood floor (must support 200 lbs)	
■	DIMENSIONS	
	in	cm
A	25	63.50
B	24 min.	60.96
C	29 1/16 ± 1/16	73.81
D	24 min.	60.96
E	28 1/2 ± 1/16	72.39
F	29 1/2	74.93
G	29 3/4	75.57
H**	25 1/2	64.77
I	36	91.44
J	1 1/2 min.	3.81
K	3 max.	6.62 max.
▲	NOTES	

- V See installation instructions for dimensions. Dimensions vary per cooktop.
- W Allow for 1/8" trim overlap on each side.
- X Gas connection for cooktop must be located in adjacent left accessible location. Electrical connection for electric cooktop must in adjacent accessible location. Cooktop and wall oven must be on separate 120/240 or 120/208 volt 60 Hz AC circuits.
- Y Gas or electric cooktops may be installed over ovens. See cooktop installation instructions for cutout size.***
- Z Do not block air exhaust slots along bottom of oven.

* Hole must be cut as close to corner of cabinet as possible.
** Excluding door handle.
*** See your Jenn-Air dealer for approved cooktops.

These appliances have been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194°F. If these appliances are installed with cabinets that have a lower working temperature than 194°F, discoloration, delamination or melting may occur.

30" JJW8130DD, JJW9130DD

DESCRIPTION		
1	1 1/4" dia. conduit access hole*	
2	3/8" plywood floor (must support 142 lbs)	
■	DIMENSIONS	
	in	cm
A	25	63.50
B	24 min.	60.96
C	27 1/4	70.80
D	24 min.	60.96
E	28 1/2 ± 1/16	72.39
F	28 1/4	71.80
G	29 3/4	75.57
H**	24 3/16	62.1
I	36	91.44
J	1 1/2	3.81
K	see chart	see chart
▲	NOTES	


- V See installation instructions for dimensions. Dimensions vary per cooktop.
- W Allow for 1/8" trim overlap on each side.
- X Gas connection for cooktop must be located in adjacent left accessible location. Electrical connection for electric cooktop must in adjacent accessible location. Cooktop and wall oven must be on separate 120/240 or 120/208 volt 60 Hz AC circuits.
- Y Gas or electric cooktops may be installed over ovens. See cooktop installation instructions for cutout size.***
- Z Do not block air exhaust slots along bottom of oven.

30" JJW8130, JJW9130

	in	cm
K Electric	3 1/4 min.	7.9 min.
K Induction	3 1/4 min.	7.9 min.
K 4 Burner Gas Stamped Top	4 13/16 min.	12.2 min.
K 4 Burner Gas Glass Top	4 13/16 min.	12.2 min.

* Hole must be cut as close to corner of cabinet as possible.
** Excluding door handle.
*** See your Jenn-Air dealer for approved cooktops.

30" CONVENIENCE OVEN DIMENSION DIAGRAMS

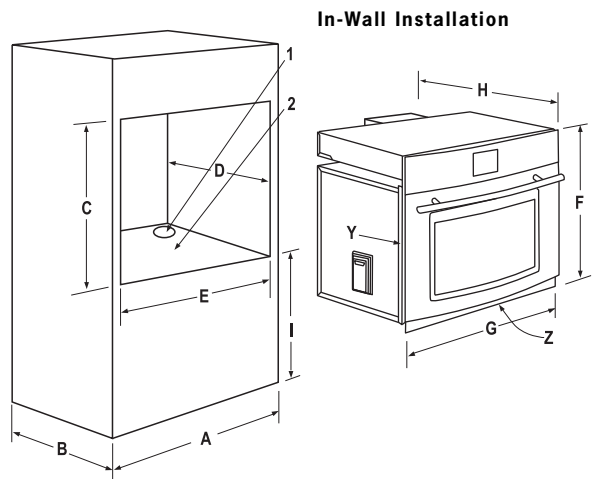


Note: See page 126-127 for additional installation options.

These appliances have been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194°F. If these appliances are installed with cabinets that have a lower working temperature than 194°F, discoloration, delamination or melting may occur.

Electrical Requirements: Provide for 120/240 or 120/208 VAC, 60 Hz. See serial plate on front of unit for power requirements.

CONVENIENCE OVEN		
30"	JJW7530DD	
●	DESCRIPTION	
1	1 ¼" dia. conduit access hole*	
2	¾" plywood floor (must support 150 lbs)	
■	DIMENSIONS	
	in	cm
A	30 min.	76.20
B	24 min.	60.96
C	22 ⅝ ± ⅛	56.52
D	24 min.	60.96
E	28 ½ ± ⅛	72.39
F	23 ⅛	59.69
G	29 ¾	75.57
H**	25 ½	64.77
I	4 to 37.5	10.20 to 95.25
▲	NOTES	
Y	Allow for ¼" trim overlap on each side.	
Z	Do not block air exhaust slots along bottom of oven.	

* Hole must be cut as close to corner of cabinet as possible.
** Excluding door handle.

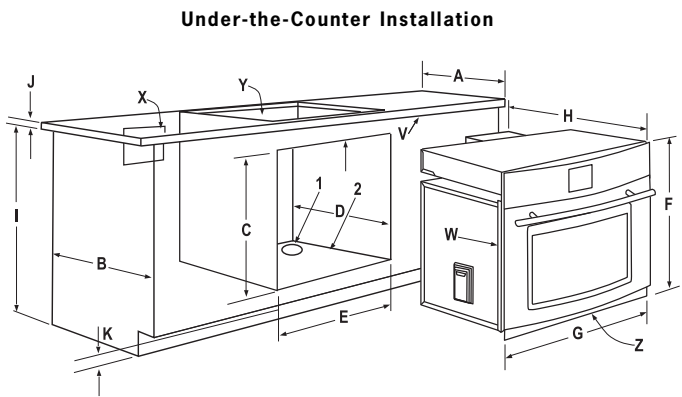

IMPORTANT: Cutout Dimensions Are Critical. Refer to installation instructions packaged with product BEFORE making cutouts.

These appliances have been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194°F. If these appliances are installed with cabinets that have a lower working temperature than 194°F, discoloration, delamination or melting may occur.

Electrical Requirements: Provide for 120/240 or 120/208 VAC, 60 Hz. See serial plate on front of unit for power requirements.

CONVENIENCE OVEN		
30"	JJW7530DD	
●	DESCRIPTION	
1	1 ¼" dia. conduit access hole*	
2	¾" plywood floor (must support 150 lbs)	
■	DIMENSIONS	
	in	cm
A	25	63.5
B	24 min.	60.96
C	22 ⅝ ± ⅛	56.52
D	24 min.	60.96
E	28 ½ ± ⅛	72.39
F	23 ⅛	59.69
G	29 ¾	75.57
H*	25 ½	64.77
I	36	91.44
J	1 ½	3.81
K	9 ½ max.	24.13 max.

▲	NOTES	
V	See installation instructions for dimensions. Dimensions vary per cooktop.	
W	Allow for ¼" trim overlap on each side.	
X	Gas connection for cooktop must be located in adjacent left accessible location. Electrical connection for electric cooktop must in adjacent accessible location. Cooktop and wall oven must be on separate 120/240 or 120/208 volt 60 Hz AC circuits.	
Y	Gas or electric cooktops may be installed over ovens. See cooktop installation instructions for cutout size.***	
Z	Do not block air exhaust slots along bottom of oven.	

* Hole must be cut as close to corner of cabinet as possible.
** Excluding door handle.
*** See your Jenn-Air dealer for approved cooktops.


IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

DOUBLE ELECTRIC WALL OVENS

DOUBLE ELECTRIC WALL OVEN FEATURES AND SPECIFICATIONS										
MODEL #	27"				30"					
	JJW 8627DD	JJW 9627DD	JJW 9827DD	Pro-Style® JJW 9827DDP	JJW 8230DD	JJW 8630DD	JJW 9230DD	JJW 9630DD	JJW 9830DD	Pro-Style® JJW 9830DDP
Overall Height (in)	52 ¼	52 ¼	52 ¼	52 ¼	50 ¼	52 ¼	50 ¼	52 ¼	52 ¼	52 ¼
Overall Width (in)	26 ¾	26 ¾	26 ¾	26 ¾	29 ¾	29 ¾	29 ¾	29 ¾	29 ¾	29 ¾
Overall Depth* (in)	25 ½	25 ½	25 ½	25 23/32	24 7/16	25 ½	24 7/16	25 ½	25 ½	25 23/32
Cutout Height (in)	51 7/8	51 7/8	51 7/8	51 7/8	50	51 7/8	50	51 7/8	51 7/8	51 7/8
Cutout Width (in)	25 ½	25 ½	25 ½	25 ½	28 ½	28 ½	28 ½	28 ½	28 ½	28 ½
Cutout Depth (in)	24 min.	24 min.	24 min.	24 min.	24	24 min.	24	24 min.	24 min.	24 min.
Oven Interior Height (in)	14 ¾	14 ¾	14 ¾	14 ¾	15	16 ½	15	16 ½	16 ½	16 ½
Oven Interior Width (in)	21	21	21	21	23 ½	23	23 ½	23	23	23
Oven Interior Depth (in)	18 ½	18 ½	18 ½	18 ½	18 ½	18 ¾	18 ½	18 ¾	18 ¾	18 ¾
Oven Capacity (cu. ft.)	3.3	3.3	3.3	3.3	3.8	4.0	3.8	4.0	4.0	4.0
Total Connected Load-KW@240V (see chart on page 120)	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2
Jenn-Air Platinum Warranty	•	•	•	•	•	•	•	•	•	•
Oven Features										
Two-Speed Convection with Convection Element		U	B	B			U	U	B	B
MultiMode® Convection ^A		•	•	•				•	•	•
Two-Mode Convection ^A (Convect Bake/Convect Roast)							U			
Bake/Broil Oven with Variable Temperature Broiling	•	•	•	•	•	•	•	•	•	•
Hidden Bake Element	B	B	B	B		B		B	B	B
6-Pass™ Broil Element					B		B			
8-Pass Recessed Broil Element						B		B	B	B
8-Pass Semi-Recessed Broil Element	B	B	B	B						
Closed-Door Broiling	•	•	•	•		•		•	•	•
Porcelain Broil Pan	•	•	•	•	•	•	•	•	•	•
CustomClean™ Self-Cleaning w/ Automatic Lock	B	B	B	B	B	B	B	B	B	B
Heavy-Duty Oven Racks ^B	2U, 2L	3U, 2L	3U, 3L	3U, 3L	2U, 2L	2U, 2L	3U, 2L	3U, 2L	3U, 3L	3U, 3L
Create-A-Space™ Half-Rack		U	B	B			U	U	B	B
Automatic Light	•	•	•	•	•	•	•	•	•	•
Control Features										
Smart Touch Electronic Controls with Prompts	•	•	•	•		•		•	•	•
Electronic Controls					•		•			
Electronic Clock with Timers	2 Timers	2 Timers	2 Timers	2 Timers	1 Timer	2 Timers	1 Timer	2 Timers	2 Timers	2 Timers
Automatic Convection Conversion ^C		•	•	•			•	•	•	•
Favorite Settings Memory Option ^D	•	•	•	•	•	•	•	•	•	•
Cook & Hold Option ^F	•	•	•	•	•	•	•	•	•	•
Delay Start Cooking and Cleaning	•	•	•	•	•	•	•	•	•	•
Bread Proofing Feature ^F		•	•	•			•	•	•	•
Keep Warm Feature	•	•	•	•	•	•	•	•	•	•
Food Temperature Probe		U	U	U				U	U	U
Control Lockout	•	•	•	•	•	•	•	•	•	•
Control Setup Options ^G	•	•	•	•		•		•	•	•
Sabbath Mode	•	•	•	•	•	•	•	•	•	•
Exterior Features										
Stylish Frameless Curved Design	•	•	•			•		•	•	
Pro-Style® Model with Professional Styling				•						•
Flush-to-the Cabinet Design	•	•	•	•	•	•	•	•	•	•
Floating Glass-Front Door	•	•	•			•		•	•	
Extra-Large Panaview™ Windows	•	•	•	•	•	•	•	•	•	•
Contoured Towel Bar Handles ^H					•		•			
Stainless Steel Towel Bar Handles	•	•	•	•		•		•	•	•
Color Indicators (add to end of model number) B=Black, W=White, Q=Bisque, S=Stainless Steel, P=Pro-Style® Stainless Steel	B,W,Q,S	B,W,S	B,W,S	P	B,W,S	B,W,Q,S	B,W,S	B,W,S	B,W,S	P
Available in Canada	•	•	•	•	•	•	•	•	•	•
Approximate Shipping Weight (lbs./kg)	285/129	282/128	290/132	286/130	235/106	305/138	235/106	305/138	308/140	304/138

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

30"/27" DOUBLE WALL OVEN DIMENSION DIAGRAMS

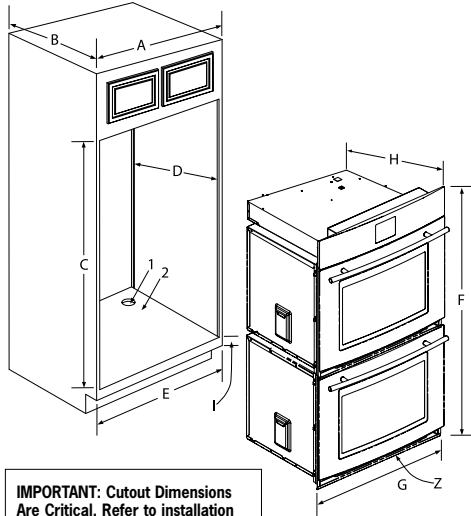

IMPORTANT: Cutout Dimensions Are Critical. Refer to installation instructions packaged with product BEFORE making cutouts.


30" JJW9830DD, JJW9630DD, JJW8630DD			30" JJW8230DD, JJW9230DD			27" JJW9827DD, JJW9627DD, JJW8627DD		
●	DESCRIPTION		●	DESCRIPTION		●	DESCRIPTION	
1	1 1/4" dia. conduit access hole*		1	1 1/4" dia. conduit access hole*		1	1 1/4" dia. conduit access hole*	
2	3/4" plywood floor (must support 310 lbs)		2	3/4" plywood floor (must support 310 lbs)		2	3/4" plywood floor (must support 310 lbs)	
■	DIMENSIONS		■	DIMENSIONS		■	DIMENSIONS	
	in	cm		in	cm		in	cm
A	30 min.	76.20	A	30 min.	76.20	A	27 min.	68.58
B	24 min.	60.96	B	24 min.	60.96	B	24 min.	60.96
C	51 1/8 ± 1/16	131.76	C	50 ± 1/16	127.00	C	51 1/8 ± 1/16	131.76
D	24 min.	60.96	D	24 min.	60.96	D	24 min.	60.96
E	28 1/2 ± 1/16	72.39	E	28 1/2 ± 1/16	72.39	E	25 1/2 ± 1/16	64.77
F	52 1/4	132.72	F	50 1/4	127.64	F	52 1/4	132.72
G	29 3/4	75.57	G	29 3/4	75.57	G	26 3/4	67.95
H**	25 1/2	64.77	H**	24 1/8	62.07	H**	25 1/2	64.77
I	4 to 10	10.20 to 25.40	I	4 to 10	10.20 to 24.50	I	4 to 10	10.20 to 24.50
▲	NOTES		▲	NOTES		▲	NOTES	
Z	Do not block air exhaust slots along bottom of oven.		Z	Do not block air exhaust slots along bottom of oven.		Z	Do not block air exhaust slots along bottom of oven.	

Electrical Requirements: Provide for 120/240 or 120/208 VAC, 60 Hz. See serial plate on front of unit for power requirements.

* Hole must be cut as close to corner of cabinet as possible.

** Excluding door handle

30"/27" DOUBLE PRO-STYLE® WALL OVEN DIMENSION DIAGRAMS

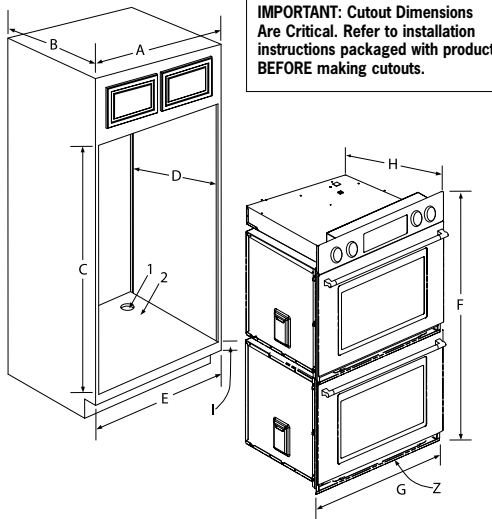

IMPORTANT: Cutout Dimensions Are Critical. Refer to installation instructions packaged with product BEFORE making cutouts.

30" JJW9830DDP			27" JJW9827DDP		
●	DESCRIPTION		●	DESCRIPTION	
1	1 1/4" dia. conduit access hole*		1	1 1/4" dia. conduit access hole*	
2	3/4" plywood floor (must support 310 lbs)		2	3/4" plywood floor (must support 310 lbs)	
■	DIMENSIONS		■	DIMENSIONS	
	in	cm		in	cm
A	30 min.	76.20	A	27 min.	68.58
B	24 min.	60.96	B	24 min.	60.96
C	51 1/8 ± 1/16	131.76	C	51 1/8 ± 1/16	131.76
D	24 min.	60.96	D	24 min.	60.96
E	28 1/2 ± 1/16	72.39	E	25 1/2 ± 1/16	64.77
F	52 1/4	132.72	F	52 1/4	132.72
G	29 3/4	75.57	G	26 3/4	67.94
H**	25 23/32	65.33	H**	25 23/32	65.33
I	4 to 10	10.20 to 25.40	I	4 to 10	10.20 to 25.40
▲	NOTES		▲	NOTES	
Z	Do not block air intake slots along bottom of oven.		Z	Do not block air intake slots along bottom of oven.	

Electrical Requirements: Provide for 120/240 or 120/208 VAC, 60 Hz. See serial plate on front of unit for power requirements.

* Hole must be cut as close to corner of cabinet as possible.

** Excluding door handle

NOTES FOR CHART ON PAGE 118 (DOUBLE ELECTRIC WALL OVENS)

U=Upper, L=Lower, B=Both

• Feature Included

* Excluding oven door handle. Add approximately 2 1/4" for door handle.

- A. MultiMode® convection selections include Convection Bake, Convection Roast, Convection Broil and Convection Pastry. Convection air is also used with the Drying and Thaw & Serve options. Model JJW9230DD also has a drying option. For drying, an optional high-quality mesh drying rack is available as an accessory. Order model #DRYINGRACK.
- B. Oven model JJW8627DD has one EasyRack™ oven rack, and one offset rack in each oven. Oven model JJW9627DD has one EasyRack™ oven rack, one offset rack and one Create-A-Space™ half-rack in the upper oven and one EasyRack™ oven rack and one offset rack in the lower oven. Oven model JJW9827DD has one EasyRack™ oven rack, one offset rack and one Create-A-Space™ half-rack in each oven. Oven model JJW8230DD has two standard oven racks in each oven. Oven model JJW8630DD has one EasyRack™ oven rack and one offset rack in each oven. Oven model JJW9230DD has two standard oven racks in each oven plus a Create-A-Space™ half-rack in the upper oven. Oven model JJW9630DD has one EasyRack™ oven rack, one offset rack and one Create-A-Space™ half-rack in the upper oven and one EasyRack™ oven rack and one offset rack in the lower oven. Oven model JJW9830DD has one EasyRack™ oven rack, one offset rack and one Create-A-Space™ half-rack in each oven. The EasyRack™ oven rack has an opening at the front of the rack for easily grasping cookware without handles or sides, such as cookie sheets and baking stones. The Create-A-Space™ half-rack is a full-width rack that may be converted to a half-rack.

- C. The Automatic Convection Conversion feature takes the guesswork out of convection cooking by automatically converting standard cooking temperature/time to the correct settings for convection cooking.
- D. The Favorite Settings option ensures consistent results every time by allowing you to name, program and save the cook time, oven temperature and cooking method for up to 10 of your favorite recipes. Oven models JJW8230DD and JJW9230DD have memory for one Favorite Setting.
- E. The Cook & Hold option keeps food warm for up to one hour after the cook time has expired. The oven automatically turns off after the one hour Hold time has expired.
- F. Jenn-Air® wall ovens with convection offer a Bread Proofing feature that provides a controlled environment for proofing or allowing yeast bread products to rise in the oven prior to baking. Two methods are provided – Standard Proofing and Rapid Proofing.
- G. The Setup pad on the wall oven control panel lets the user customize several oven functions and features. These include, but are not limited to, language option of English, French or Spanish, Fahrenheit or Celsius temperature display, and an Energy Saver option that allows the control display to go dark when the oven is not in use.
- H. White and black models have color-matching handles. Stainless steel models have black handles.

All Jenn-Air® appliances are appropriately UL, AGA, CSA or CGA approved.

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

ELECTRIC OVEN AND MICROWAVE COMBOS/GAS WALL OVENS

WALL OVEN FEATURES & SPECIFICATIONS							
MODEL #	ELECTRIC OVEN/MICROWAVE COMBOS						GAS WALL OVEN***
	27"		30"		30"		
	JMW 8527DA	JMW 9527DA	JMW 8130DA	JMW 8530DA	JMW 9130DA	JMW 9530DA	
Overall Height (in)	52 1⁄6	52 1⁄6	47 ¾	52 1⁄6	47 ¾	52 1⁄6	34 1⁄6
Overall Width (in)	26 ¾	26 ¾	29 ¾	29 ¾	29 ¾	29 ¾	30 ¾
Overall Depth* (in)	25 ½	25 ½	24 7⁄6	25 ½	24 7⁄6	25 ½	25
Cutout Height (in)	51 ½	51 ½	47 5⁄6	51 ½	47 5⁄6	51 ½	33 13⁄6
Cutout Width (in)	25 ½	25 ½	28 ½	28 ½	28 ½	28 ½	30 ¾
Cutout Depth (in)	24 min.	24 min.	24	24 min.	24	24 min.	24 min.
Oven Interior Height** (in)	14 ¾	14 ¾	15	16 ½	15	16 ½	16 ½
Oven Interior Width** (in)	21	21	23 ½	23	23 ½	23	23
Oven Interior Depth** (in)	18 ½	18 ½	18½	18 ¾	18½	18 ¾	18 ¾
Oven Capacity** (cu. ft.)	3.3	3.3	3.8	4.0	3.8	4.0	4.0
Total Connected Load-KW@240V (see chart below)	6.6	6.6	6.6	6.6	6.6	6.6	
BTUs (Oven) Natural/LP							18,000/18,000
BTUs (Broiler) Natural/LP							13,000/13,000
Jenn-Air Platinum Warranty	•	•	•	•	•	•	•
Oven Features							
Two-Speed Convection with Convection Element		•			•	•	
MultiMode® Convection ⁴		•				•	
Two-Mode Convection (Convect Bake/Convect Roast)					•		
Bake/Broil Oven with Variable Temperature Broiling	•	•	•	•	•	•	•
Hidden Bake Element/Burner	•	•		•		•	•
6-Pass™ Broil Element			•		•		
8-Pass Recessed Broil Element				•		•	
8-Pass Semi-Recessed Broil Element	•	•					
Closed-Door Broiling	•	•		•		•	
Porcelain Broil Pan	•	•	•	•	•	•	•
CustomClean™ Self-Cleaning w/ Automatic Lock	•	•	•	•	•	•	•
Heavy-Duty Oven Racks ⁸	2L	3L	2L	2L	3L	3L	2
Creat-A-Space™ Half-Rack		•			•	•	
Microwave Oven ^c	U	U	U	U	U	U	
Automatic Light	•	•	•	•	•	•	•
Electronic Pilotless Ignition							•
Convertible to LP Gas							•
Control Features							
Smart Touch Electronic Controls with Prompts	•	•		•		•	
Electronic Controls			•		•		•
Electronic Clock with Timer(s)	2 Timers	2 Timers	1 Timer	2 Timers	1 Timer	2 Timers	1Timer
Automatic Convection Conversion ^d		•			•	•	
Favorite Settings Memory Option ^e	•	•	•	•	•	•	•
Cook & Hold Option ^f	•	•	•	•	•	•	•
Delay Start Cooking and Cleaning	•	•	•	•	•	•	•
Bread Proofing Feature ^g		•			•	•	
Keep Warm Feature	•	•	•	•	•	•	•
Food Temperature Probe		L				L	
Control Lockout	•	•	•	•	•	•	•
Control Setup Options ^h	•	•		•		•	
Sabbath Mode	•	•	•	•	•	•	•
Exterior Features							
Stylish Frameless Curved Design	•	•		•		•	
Flush-to-the Cabinet Design	•	•	•	•	•	•	•
Floating Glass-Front Door	•	•		•		•	
Extra-Large Panaview™ Window	•	•	•	•	•	•	•
Stainless Steel Towel Bar Door Handle	•	•		•		•	
Contoured Towel Bar Handle ⁱ			•		•		•
Color Indicators (add to end of model number) B=Black, W=White, Q=Bisque, S=Stainless Steel	B,W,Q,S	B,W,S	B,W,S	B,W,Q,S	B,W,S	B,W,S	B,W
Available in Canada							•
Approximate Shipping Weight (lbs./kg)	253 / 115	255 / 116	186/84	263 / 119	186/84	265/ 120	198 / 90

- U=Upper, L=Lower, B=Both
- Feature Included
 - * Excluding oven door handle. Add approximately 2 1/4" for door handle.
 - ** Lower oven cavity on combination ovens
- A. MultiMode® convection selections include Convect Bake, Convect Roast, Convect Broil and Convect Pastry. Convection air is also used with the Drying and Thaw & Serve options. Oven model JMW9130DD also has a drying option. For drying, an optional high-quality mesh drying rack is available as an accessory. Order model #DRYINGRACK.
- B. Oven models JMW8527DD and JMW8530DD have one EasyRack™ oven rack and one off-set rack. Oven model JMW9527DD has one EasyRack™ oven rack, one offset rack and one Create-A-Space™ half rack. Oven model JMW8130DD has two standard oven racks. Oven model JMW9130DD has two standard oven racks plus a Create-A-Space™ half rack. Oven model JMW9530DD has one EasyRack™ oven rack, one offset rack and one Create-A-Space™ half rack. The EasyRack™ oven rack has an opening at the front of the rack for easily grasping cookware without handles or sides, such as cookie sheets and baking stones. The Create-A-Space™ half rack is a full-width rack that may be converted to a half-rack. Gas wall oven JGW8130DD has two standard oven racks. An optional half-rack, model # HALFRAK, is available. To order, contact a Jenn-Air dealer.
- C. The microwave on models JMW8527DA, JMW9527DA, JMW8530DA and JMW9530DA has the same features as model JMC8127DD/JMC8130DD (see pages 122-123 for microwave features and specifications). Models JMW8130DA and JMW9130DA have a 2.1 cu. ft., 1100 watt microwave. Features include 10 power levels, sensor-controlled cooking, electronic controls, digital display with clock, one-touch cook pads, rapid defrost, auto and timed defrost, custom programs and Easy Cook.
- D. The Automatic Convection Conversion feature takes the guesswork out of convection cooking by automatically converting standard cooking temperature/time to the correct settings for convection cooking.
- E. The Favorite Settings option ensures consistent results every time by allowing you to name, program and save the cook time, oven temperature and cooking method for up to 10 of your favorite recipes. Models JMW8130DA, JMW9130DA and gas wall oven model JGW8130DD has memory for one Favorite Setting.
- F. The Cook & Hold option keeps food warm for up to one hour after the cook time has expired. The oven automatically turns off after the one hour Hold time has expired.
- G. Jenn-Air® electric wall ovens with convection offer a Bread Proofing feature that provides a controlled environment for proofing or allowing yeast bread products to rise in the oven prior to baking. Two methods are provided – Standard Proofing and Rapid Proofing.
- H. The Setup pad on the electric wall oven control panel lets the user customize several oven functions and features. These include, but are not limited to, language option of English, French or Spanish, Fahrenheit or Celsius temperature display, and an Energy Saver option that allows the control display to go dark when the oven is not in use.
- I. White and black models have color-matching handles. Stainless steel models have black handles.


*** Built-In Microwave Models JMC8127, JMC8130 and JMC9158 may not be installed above gas wall oven Model JGW8130.

All Jenn-Air® appliances are appropriately UL, AGA, CSA or CGA approved.

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.


CIRCUIT PROTECTION SPECIFICATION GUIDE		
Recommended Minimum		
K.W. Rating	Circuit Protection	Wire Size
On Serial Plate	In Amperes	AWG
0 – 4.8	20	12
4.9 – 6.9	30	10
7.0 – 9.9	40	8
10.0 – 11.9	50	8
12.0 – 14.9	60	6

30" GAS WALL OVEN DIMENSION DIAGRAM

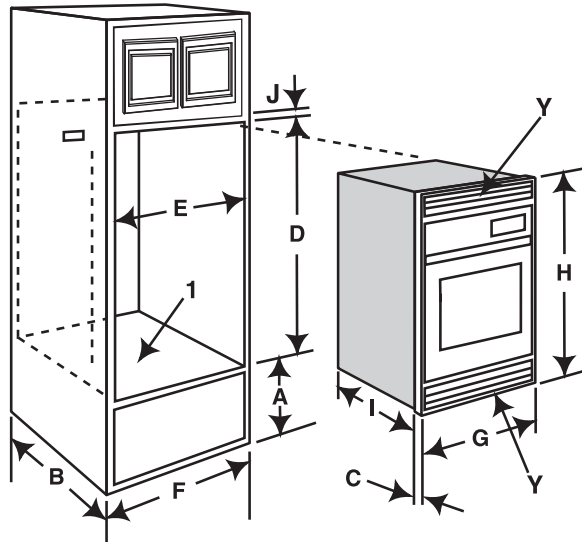

JGW8130DD		
DIMENSIONS		
■	in	cm
A	12 min.	30.48
B	24	60.96
C	1 ½	2.85
D	33 13⁄16	85.88
E	30 3⁄8	76.52
F	33 min.	83.82
G	30 ⅞	78.43
H	34 ⅞	86.36
I*	23 ⅞	60.64
J	See installation instructions for minimum clearance.	
▲ NOTES		
1	Complete floor is recommended to prevent unusual drafts.	
Y	Do not obstruct oven vent.	
* Excluding door handle		


MICROWAVE WALL OVEN COMBO DIMENSION DIAGRAM

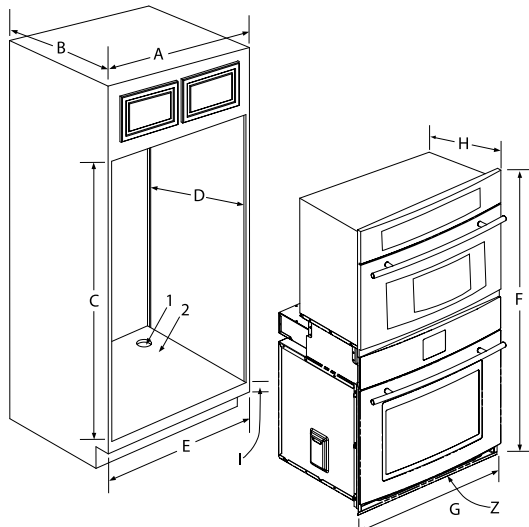

IMPORTANT: Cutout Dimensions Are Critical. Refer to installation instructions packaged with product BEFORE making cutouts.

NOTES: Installed combo wall oven overlaps the cut out 15/16" (2.38 cm) at the top and 1/8" (.32 cm) at the bottom. This must be taken into consideration when locating cutout if installed unit is to be centered in the cabinet.

These appliances have been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194°F. If these appliances are installed with cabinets that have a lower working temperature than 194°F, discoloration, delamination or melting may occur.

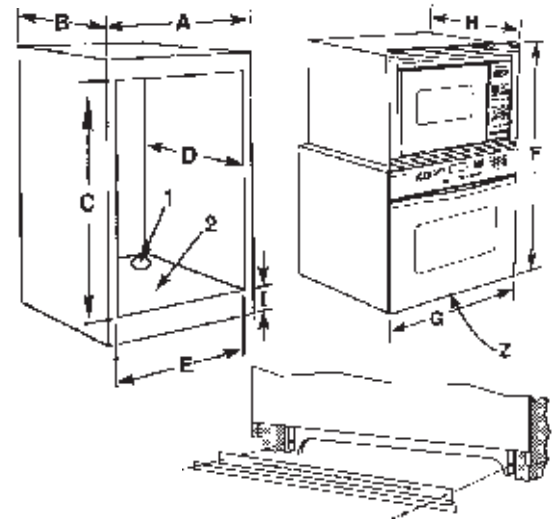

30"	JMW8530DA, JMW9530DA		27"	JMW8527DA, JMW9527DA	
	DIMENSIONS			DIMENSIONS	
■	in	cm	■	in	cm
A	30 min.	76.20 min.	A	27 min.	68.58 min.
B	24 min.	60.96 min.	B	24 min.	60.96 min.
C	51 1/8 ± 1/8	131.76 ± .16	C	51 1/8 ± 1/8	131.76 ± .16
D	24 min.	60.96 min.	D	24 min.	60.96 min.
E	28 1/2 ± 1/8	72.39 ± .16	E	25 1/2 ± 1/8	64.77 ± .16
F	52 15/16	134.46	F	52 15/16	134.46
G	29 3/4	75.49	G	26 3/4	67.95
H*	25 1/2	64.77	H*	25 1/2	64.77
I	4-10	10.2-25.40	I	4-10	10.2-25.40
▲	NOTES		▲	NOTES	
1	1 1/4" Dia. Conduit Access Hole**		1	1 1/4" Dia. Conduit Access Hole**	
2	5/8" plywood floor (must support 310 lbs)		2	5/8" plywood floor (must support 310 lbs)	
Z	Do not block air intake slots along bottom of oven.		Z	Do not block air intake slots along bottom of oven.	

* Excluding door handle

**Hole must be cut as close to corner of cabinet as possible.

Electrical Requirements: Provide for 120/240 or 120/208 VAC, 60 Hz. See serial plate on front of unit for power requirements.

30"	JMW8130DA, JMW9130DA	
	DIMENSIONS	
■	in	cm
A	30 min.	76.20
B	24 min.	60.96
C	47 ⅛	119.4
D	24 min.	60.96
E	28 ½	72.40
F	47 ¾	120.9
G	29 ¾	75.57
H*	24 ⅛	62.1
I	4-20	10.2-50.8
▲	NOTES	
1	1¼" Dia. Conduit Access Hole**	
2	⅝" plywood floor (must support 250 lbs)	
Z	Do not block air intake slots along bottom of oven.	

* Excluding door handle

**Hole must be cut as close to corner of cabinet as possible.

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

MICROWAVE OVENS

MICROWAVE OVENS FEATURES AND SPECIFICATIONS


MODEL #	BUILT-IN		OVER-THE-RANGE	
	JMC 8127DD	JMC 8130DD	JMC 9158AA	JMV 8208AA
Overall Width (in)	26 ¾	29 ¾	22 ¾	29 ¾
Overall Height (in)	23 ⅞	23 ⅞	14 ¾	16 ⅞
Overall Depth (in)	20 ⅜ ^A	20 ⅜ ^A	20	15 ¾
Oven Interior Height (in)	10 ⅞	10 ⅞	10 ⅞	10 ⅞
Oven Interior Width (in)	15 ¼	15 ¼	15 ¼	23 ½
Oven Interior Depth (in)	15	15	15	14 ¾
Turntable Diameter (in)	12 ¾	12 ¾	12 ¾	15 ¾ x 13 ^B
Oven Capacity (cu. ft.)	1.5	1.5	1.5	2.0
Power Outputs (watts)	1000	1000	1000	1100
Jenn-Air Platinum Warranty	•	•	•	•
Curved Front Styling	•	•	•	•
Electronic Touch Controls	•	•	•	•
Display Window with Digital Clock, Prompts & Indicators	•	•	•	•
Large Oven Window	•	•	•	•
Automatic Oven Light	•	•	•	•
Below Oven Halogen Work Surface Light w/ On/Off Timer	•	•	•	•
Separate Kitchen Timer	•	•	•	•
Power Levels	10	10	10	10
Convection and Combination Cooking	•	•	•	•
One-Touch Start	•	•	•	•
Multi-Stage Memory Programming	2-Stage	2-Stage	2-Stage	4-Stage
Warm/Hold, Hold/Warm ^C	•	•	•	•
Defrost By Time	•	•	•	•
Auto Defrost and Quick/Rapid Defrost	•	•	•	•
Auto Sensor Microwaving	Baked Potato, Beverage, Fresh Vegetable, Frozen Entrée, Frozen Vegetable, Pizza Slice, Popcorn, Reheat Entrée, Soup/Sauce	Baked Potato, Beverage, Fresh Vegetable, Frozen Entrée, Frozen Vegetable, Pizza Slice, Popcorn, Reheat Entrée, Soup/Sauce	Cook (0-9 Selections), Popcorn, Reheat (dinner plate, soup, casserole)	Cook (7 categories) Popcorn, Reheat (4 categories)
Auto Non-Sensored Microwaving				Poultry (4 categories), Soften (4 categories), Melt (4 categories)
More/Less Time Adjustment Touch Pads	•	•	•	•
Add 30 Seconds Touch Pad ^D	•	•	•	•
Easy Cook Touch Pad ^D	•	•	•	•
Custom Recipe /Custom Programs	•	•	•	•
Control Setup/Options	•	•	•	•
Control Panel Lock	•	•	•	•
Glass Turntable/Tray ^E	•	•	•	•
Removable Oven Rack	•	•	•	•
Convection Rack	•	•	•	•
Exhaust Fan Speeds ^F	•	•	•	5
Outside or Ductless Venting ^G	•	•	•	•
Grease Filter and Charcoal Filter Included	•	•	•	•
Drop-Down Oven Door w/ Stainless Steel Handle	•	•	•	•
Pull To Open Oven Door	•	•	•	•
Built-In Installation With No Trim Kit Required	•	•	•	•
Trim Kits Available for In-Wall Built-In Installation ^G	•	•	AST2780 AST3080	•
May Be Used in Countertop Installation	•	•	•	•
May Not Be Used Above A Gas Wall Oven	•	•	•	•
May Not Be Installed Under Counter	•	•	•	•
Color Indicators (add to end of model number) B=Black; W=White; Q=Bisque; S=Stainless Steel	B,W,Q,S	B,W,Q,S	B,W,Q,S	B,W,Q,S
Available in Canada	•	•	•	B,S
Approximate Shipping Weight (lbs/kg)	70 / 32	77 / 35	59 / 27	68 / 31

- Feature included.
- A. Excluding oven door handle. Add Approximately 2 ¼" for door handle.
- B. Model JMV8208 has a turntable with rectangular bottom that accommodates large pans. It slides from side to side to ensure even heating.
- C. Safely keeps cooked food warm for up to 99 minutes (JMC9158) or 90 minutes (JMV8208) using microwave energy. May be used by itself or to automatically follow a cooking cycle.
- D. These time saving features let you start the microwave without using the Start pad.
- E. Model JMV8208 features a WideGlide™ tray that moves from side to side to aid in even heating.
- F. The ventilation fan automatically activates when the temperature gets too hot around the microwave. The fan may also be turned on and off manually from the microwave control panel. Model JMV8208 features a vent auto time set pad for setting 1 - 30 minutes of ventilation time. The microwaves are preset for recirculating ventilation. They may be converted to outside ventilation. Duct size is 3 1/4" x 10".
- G. Trim kits to install JMC9158 above Jenn-Air® wall ovens include:
AST2780AB/W/C/S for 27" wall oven. Installed dimensions are 20 5/16" H x 26 7/8" W. AST3080AB/W/C/S for 30" oven. Installed dimensions are 20 5/16" H x 29 3/4" W.

JMC8127, JMC8130 and JMC9158 models may not be installed above a gas wall oven.

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

MODELS JMC8130 & JMC8127 MICROWAVE OVEN DIMENSION DIAGRAMS

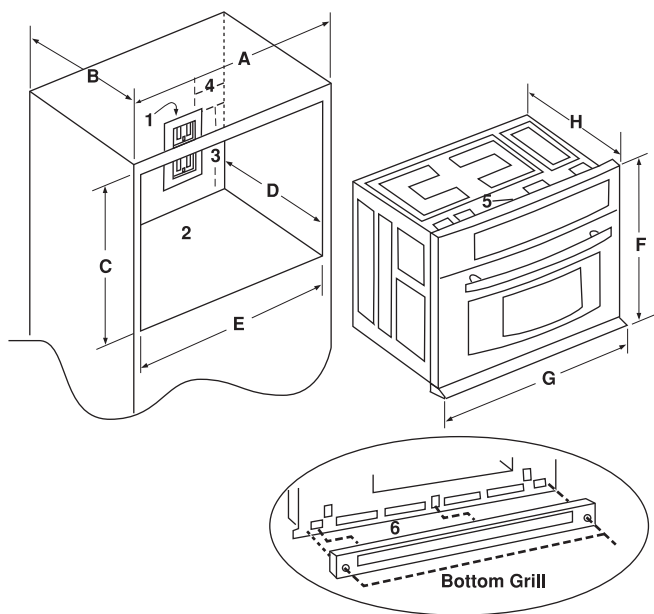


JMC8130			JMC8127		
Dimensions			Dimensions		
■	in	cm	■	in	cm
A	30 min	76.2 min	A	27 min	68.58 min
B	24 min	60.96 min	B	24 min	60.96 min
C	22 5/16	57.47 + 0.16	C	22 5/16	57.47 + 0.16
D	24 min	60.96 min	D	24 min	60.96 min
E	28 1/16	72.39 + 0.16	E	25 1/16	64.77 + 0.16
F	23 1/16	59.69	F	23 1/16	59.69
G	29 3/4	75.56	G	26 3/4	67.95
H	20 3/16	51.27	H	20 3/16	51.27

Notes:

1. Properly Polarized and Grounding Outlet.
2. 5/8 Plywood Floor (Must Support 100 lbs.)
3. About 15-7/8 Inches
4. About 1-3/8 Inches
5. Do not block air intake slots along top of oven.
6. Do not block exhaust slot along bottom of oven.

NOTE: See page 126-127 for additional installation options


OVER-THE-RANGE MICROWAVE OVEN DIMENSION DIAGRAM

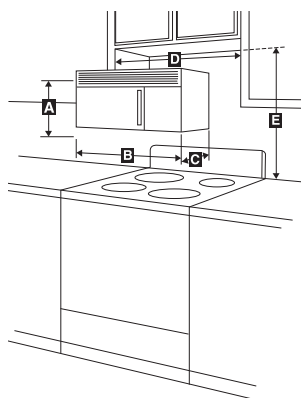

JMV8208AA		
Dimensions		
■	in	cm
A	16 1/16	41.8
B	29 3/16	174.4
C	15 3/8	39.1
D	30	76.2
E	30	76.2

Notes:

1. 33" from the countertop to the top of the microwave cutout is recommended for optimal performance of gas range and microwave.

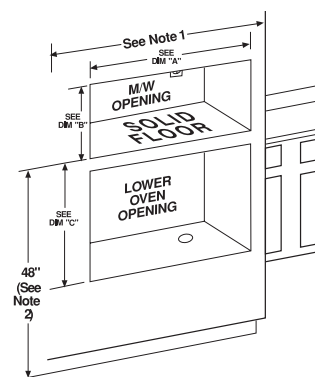MODEL JMC9158 MICROWAVE OVEN
INSTALLATION ABOVE SINGLE ELECTRIC WALL OVEN

Note 1: When installing this Kit above a built-in oven, check built-in oven installation instructions to determine cutout dimensions for the (lower) wall oven.

Note 2: For a new installation, the 48" height dimension to the bottom of the cutout for the microwave oven is recommended. This places the microwave oven bottom at approximately 50" from the floor.

TRIM KIT	AST2780	AST3080
Dim "A"	25 1/8"	28 1/8"
Dim "B"	17 1/4"	17 1/4"
Dim "C"	30 1/8" min.	30 1/8" min.
Exterior Width	26 1/8"	29 3/4"
Exterior Height	20 3/4"	20 "
Exterior Depth	7/8"	7/8"

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

WARMING DRAWER

Warming Drawer Features and Specifications		JWD7030CDX
Overall Height of Drawer (in)		9
Overall Height w/Drawer Front (in)		10 1/2
Overall Width (in)		30
Overall Depth		
(excluding faceplate and handle) (in)		23 1/4
Depth of Drawer When Fully Extended (in)		
With Curved Glass Drawer Front		25 1/4
With Pro-Style™ Drawer Front		27 7/16
Overall Depth With Drawer		
Fully Extended (in)		
With Curved Glass Drawer Front		48 1/2
With Pro-Style™ Drawer Front		50 11/16
Cutout Height (in)		9 1/4
Cutout Width (in)		28 1/2
Cutout Depth (in)		23 1/2
Drawer Interior Height (in)		5 1/8
Drawer Interior Width (in)		23 7/8
Drawer Interior Depth (in)		22
Drawer Capacity (cu. ft.)		1.6
Total Connected Load-KW ^a (see chart)		0.45
Jenn-Air Platinum Warranty		•
450-Watt Heating Element		•
Variable Temperature Control		82°F – 210°F
Preset Temperature Control		Proof – 98°F Low – 140°F Medium – 170°F High – 210°F
Variable Moisture Slide Control		Moist – Crisp
Auto-Off Timer		0-4 Hours
Continuous On Setting		•
Concealed Knob Controls		•
On Indicator Light		•
(visible when drawer is open)		
Removable Half Rack		•
Full-Extension Drawer with Roller Glides		•
Removable Stainless Steel Liner Pan		•
May Be Installed Beneath Select Jenn-Air®		
Wall Ovens and Cooktops ^b		•
Accessory Pan Set Available ^c (5 Commercial		
Grade Stainless Steel Pans w/ Lids)		•
Curved Glass Black Drawer Front ^d		JWD7130DDB
Curved Glass White Drawer Front ^d		JWD7130DDW
Curved Stainless Steel Drawer Front ^d		JWD7130DDS
Pro-Style™ Stainless Steel Drawer Front ^d		JWD7130DDP
Panel Kit for Custom Cabinet Front ^d		JWD7130CDK
Available in Canada		•
Approximate Shipping Weight (lbs./kg)		65 / 30

- Feature Included
- A. Electric models are UL listed for 3-wire 120 VAC.
- B. Includes Jenn-Air® electric wall oven models JJW7530, JJW8130, JJW8530, JJW9130, JJW9530, JJW8230, JJW8630, JJW9230, JJW9630, JJW9830, JMW8130, JMW8530, JMW9130, JMW9530 and Jenn-Air® gas wall oven JGW8130. Jenn-Air® electric cooktop models JEC8430, JEC8536, JEC9530, JEC9536, JEC0530, JEC0536 and Jenn-Air® gas cooktop models JGCP430ADP, JGCP636ADP, JGCP648ADP, JGC8430, JGC8536, JGC8645, JGC9430 and JGC9536.
- C. Order model number DRAWERPANS.
- D. A drawer front is required for mounting to the JWD7030CDX base unit. Order the front that coordinates with your Jenn-Air® wall oven and/or cooktop or best compliments the room's décor. Order the panel kit for installing a custom panel on the warming drawer to match surrounding cabinetry. Depending on the style of cabinetry and construction of the custom panel, the front of the custom panel on the warming drawer may not fit flush with surrounding cabinetry. When using the panel kit, installation of a custom handle is required (purchase custom panel and handle separately).


CIRCUIT PROTECTION SPECIFICATION GUIDE

Recommended Minimum		
K.W. Rating	Circuit Protection	Wire Size
On Serial Plate	In Amperes	AWG
0 – 4.8	20	12
4.9 – 6.9	30	10
7.0 – 9.9	40	8
10.0 – 11.9	50	8
12.0 – 14.9	60	6

All Jenn-Air® appliances are appropriately UL, AGA, CSA or CGA approved.

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.


PRODUCT DIMENSIONS

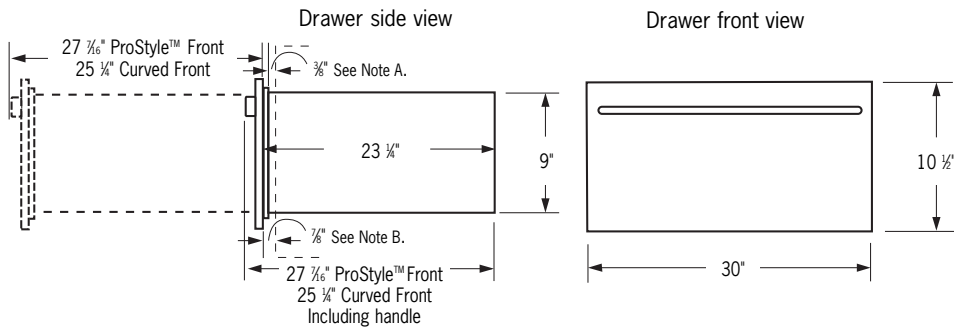

NOTES:

- A. 3/8" venting gap (when fully closed) from front of cabinet surface to back of drawer face.
 B. 7/8" gap (when fully closed) from front of cabinet surface to back of drawer front panel.

INSTALLATION UNDER A COUNTER

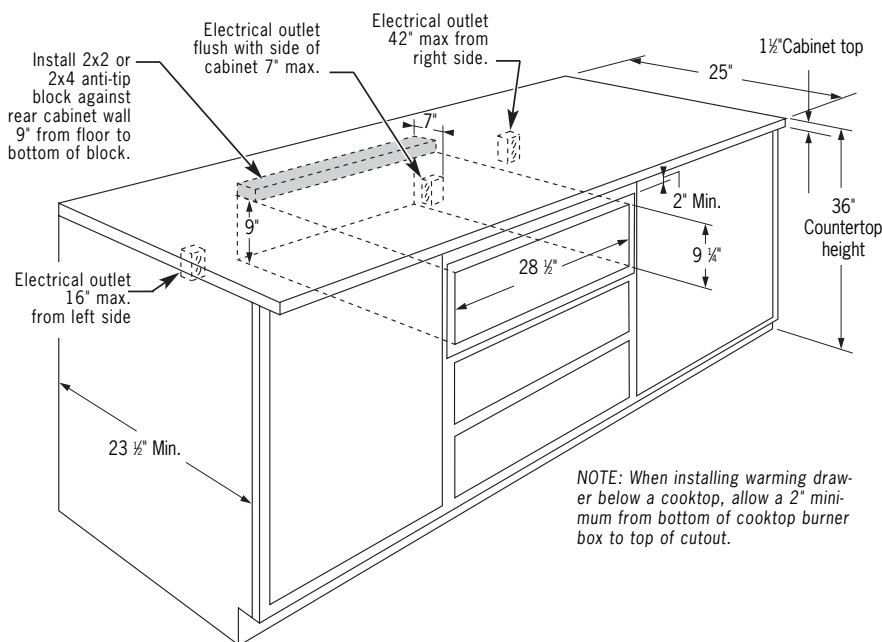

CUSTOM PANEL INSTALLATION KIT

This kit contains a mounting panel to attach to a custom drawer front. A custom handle of your choice must be installed with the front on the mounting panel.

Parts supplied:

- Mounting panel
- 7 mounting screws

The warming drawer should be installed according to the installation instructions packed with the product.


- The edges of the custom drawer front will be visible and should be finished for best appearance.
- The custom drawer front should be constructed in the same manner as typical cabinet doors.
- When ordering the custom drawer front from the cabinet manufacturer the overall dimensions should be 10 1/2" high by 29 1/8" wide.
- Order a custom handle to match the surrounding cabinetry handles.

Mounting options:


- Adhesive (recommended for panels less than 3/4" thick)
- Screws (for 3/4" panels)

CAUTION: Select screw length to avoid penetration of finished side. Do not drill completely through the custom panel.

INSTALLATION BELOW A SINGLE WALL OVEN

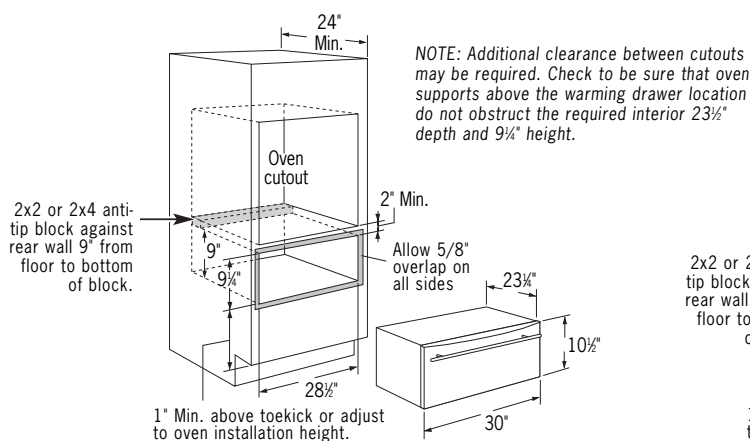

INSTALLATION BELOW A DOUBLE WALL OVEN

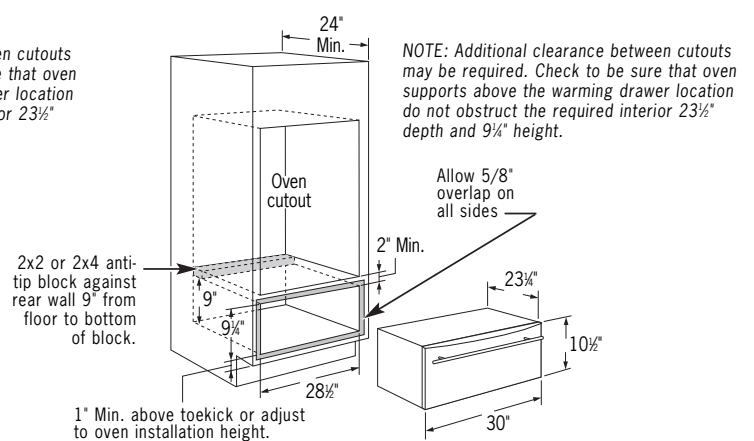


NOTE: Electrical receptacle can be installed as shown for countertop installations. Do not install receptacle above the top of the warming drawer cutout.

IMPORTANT: Cutout Dimensions Are Critical. Refer to installation instructions packaged with product BEFORE making cutouts.


IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

MULTIPLE OVEN INSTALLATION OPTIONS

JMC8130 MICROWAVE AND WARMING DRAWER INSTALLATION

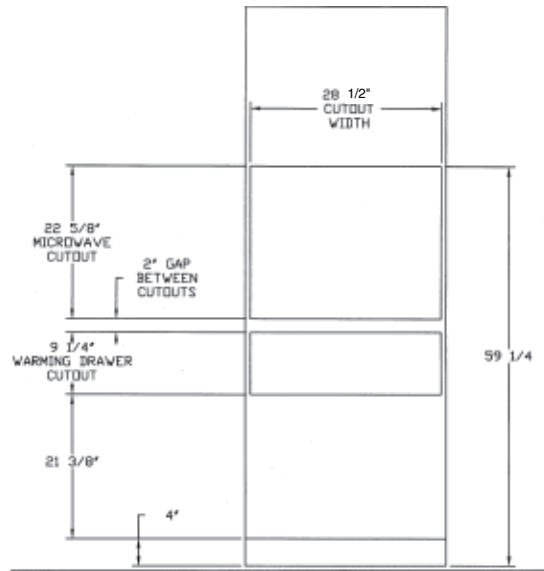


JMC8130 MICROWAVE, SINGLE WALL OVEN AND WARMING DRAWER INSTALLATION

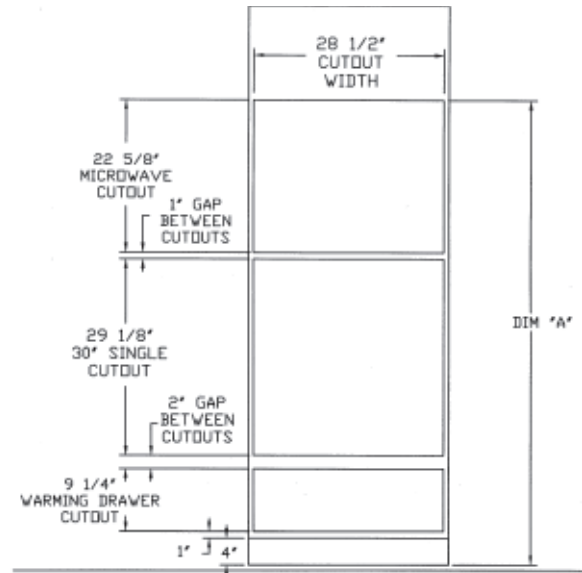

DIM A (With Warming Drawer) = 69"
DIM A (Without Warming Drawer) = 59 1/4"


JMC8130 MICROWAVE, JJW7530 CONVENIENCE OVEN AND WARMING DRAWER INSTALLATION

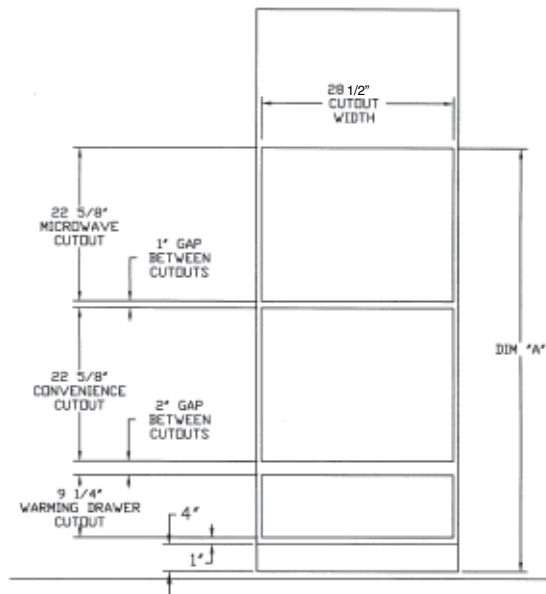


DIM A (With Warming Drawer) = 62 1/2"
DIM A (Without Warming Drawer) = 59 1/4"

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

JJW7530 CONVENIENCE OVEN, SINGLE WALL OVEN AND WARMING DRAWER INSTALLATION

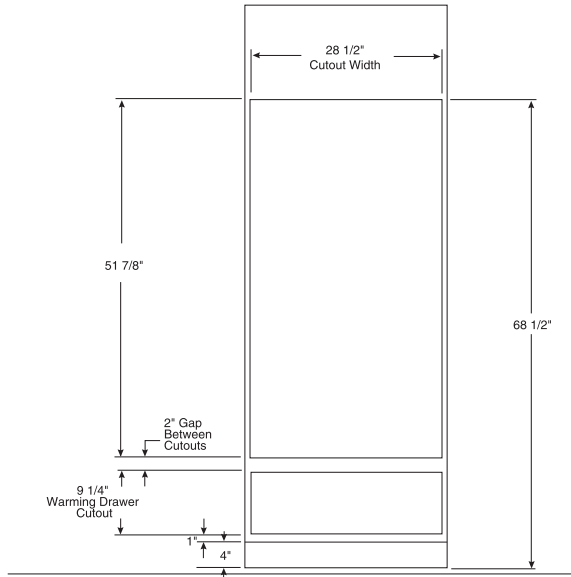


NOTE: When installing the Convenience Oven above a Single Wall Oven or another Convenience Oven, a bracket to combine the two ovens is required. Order part # CONVBRACKET. The bracket kit includes a black front air grille that bridges the gap between the upper and lower ovens.

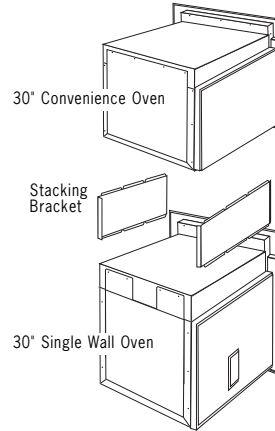


Mount the stacking brackets to the lower oven using the screws provided in the kit. Place the upper oven on the brackets and secure with the remaining screws.

NOTE: Lower oven may require drilling four 1/8" (3.175mm) diameter holes using the stacking bracket as a template.

JJW7530 CONVENIENCE OVEN OVER JJW7530 CONVENIENCE OVEN INSTALLATION

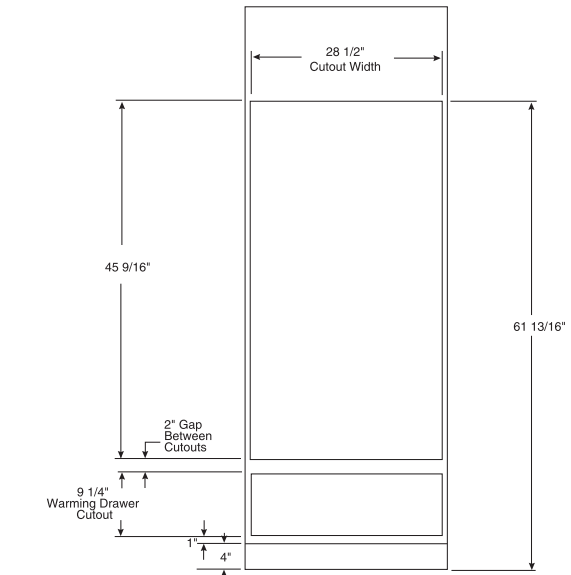

NOTE: When installing the Convenience Oven above a Single Wall Oven or another Convenience Oven, a bracket to combine the two ovens is required. Order part # CONVBRACKET. The bracket kit includes a black front air grille that bridges the gap between the upper and lower ovens.

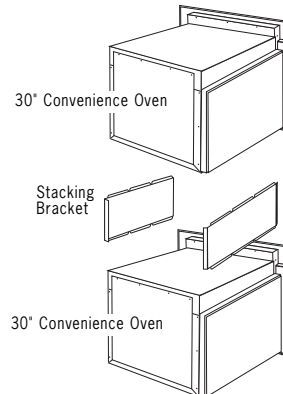

Mount the stacking brackets to the lower oven using the screws provided in the kit. Place the upper oven on the brackets and secure with the remaining screws.

NOTE: Lower oven may require drilling four 1/8" (3.175mm) diameter holes using the stacking bracket as a template.


KITCHEN VENTILATION

Chimney Hoods & Integrated Ventilation System Features and Specifications							
WALL MOUNT CHIMNEY HOODS					ISLAND MOUNT CHIMNEY HOODS		INTEGRATED VENTILATION SYSTEM FOR CUSTOM BUILT-IN HOODS
MODEL #	JXT8836AD	JXT8042AD	JXT8036AD	JXT8030AD	JXT8142AD	JXT8136AD	JXT7036AD ^A
	36"	42"	36"	30"	42"	36"	36"
Overall Width (in)	35 3/8	42	36	30	42	35 3/8	34 3/8
Overall Depth (in)	18 1/2	22	22	22	25 1/2	25 1/2	16 3/16
Rating (CFM) ^B	650	650	650	650	650	650	1150
Blower(s)	Single	Single	Single	Single	Single	Single	Dual
Electronic Touch Controls	•	•	•	•	•	•	
Slide Controls							•
Speed Settings	6	6	6	6	6	6	3
Delayed Shutoff for Fan & Light	•	•	•	•	•	•	
Filterless Self-Clean Model							•
Clean Filter Indicator	•	•	•	•	•	•	
Dishwasher Safe Aluminum Filters	•	•	•	•	•	•	
Lighting Levels	2	2	2	2	2	2	1
Lighting Type	50W Halogen	50W Halogen	50W Halogen	50W Halogen	50W Halogen	50W Halogen	50W Halogen
Number of Lights (bulbs included)	2	2	2	2	4	4	3
Discharge Size/Direction	6" Vertical	6" Vertical	6" Vertical	6" Vertical	6" Vertical	6" Vertical	8" Vertical
Optional Ductless Installation ^C	•	•	•	•	•	•	
Replacement Carbon Filters	JFLTRC8836	JFLTRC8036	JFLTRC8036	JFLTRC8030	JFLTRC8036	JFLTRC8036	
Optional Chimney Extension for 9'-12" Ceiling	CHMEXT8836	CHMEXT8036	CHMEXT8036	CHMEXT8036	CHMEXT8136	CHMEXT8136	
Sleek Curved Styling	•						
Color Indicator (add to end of model number) S=stainless steel	S	S	S	S	S	S	S
Available in Canada	•	•	•	•	•	•	•
Approximate Shipping Weight (lbs./kg)	35 / 16	60 / 27	53 / 24	53 / 24	88 / 40	78 / 35	55 / 25

- Feature included.
- A. Stainless steel integrated hood liners are available for using the JXT7036 ventilation system in 42" (order liner JXT7142ADS) or 48" (order liner JXT7148ADS) installations.
- B. Ducting configurations and length can affect airflow rates. Ratings shown are based on hoods with correctly installed ducting.
- C. No conversion kit is required for ductless installation for wall mount and island mount chimney hoods. Order carbon filters referenced in chart above that snap into the hood.


IMPORTANT: Cutout Dimensions Are Critical. Refer to installation instructions packaged with product BEFORE making cutouts.

DIMENSION DIAGRAM FOR MODEL JXT8836 WALL MOUNT CHIMNEY HOOD

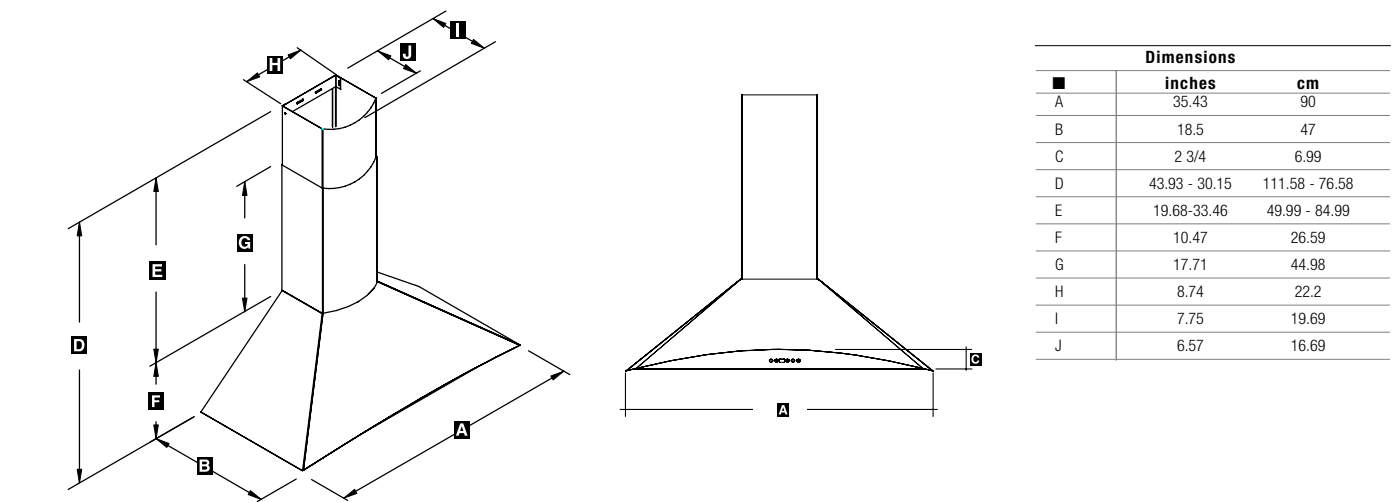


IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

DIMENSION DIAGRAM FOR MODEL JXT8036/JXT8042 WALL MOUNT CHIMNEY HOOD

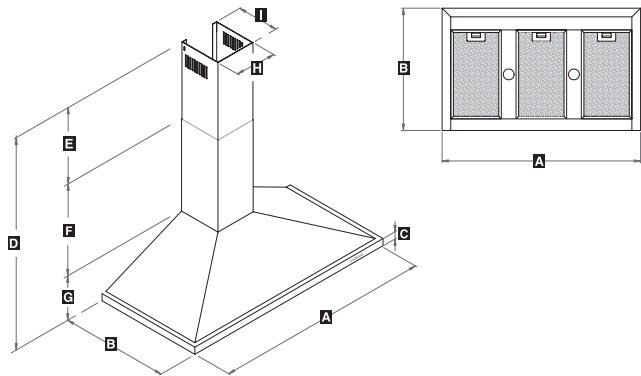


Dimensions				
MODEL#	JXT8036		JXT8042	
	inches	cm	inches	cm
A	36	91.4	42	106.6
B	22	55.9	24	61
C	1.18	3	1.18	3
D	28.94 - 46.65	73.5 - 118.5	33.07 - 54.33	84 - 138
E	21.65	55	25.59	65
F	21.65	55	25.59	65
G	5.31	13.5	5.31	13.5
H	10.43	26.5	10.43	26.5
I	10.43	26.5	10.43	26.5

DIMENSION DIAGRAM FOR MODEL JXT8030 WALL MOUNT CHIMNEY HOOD

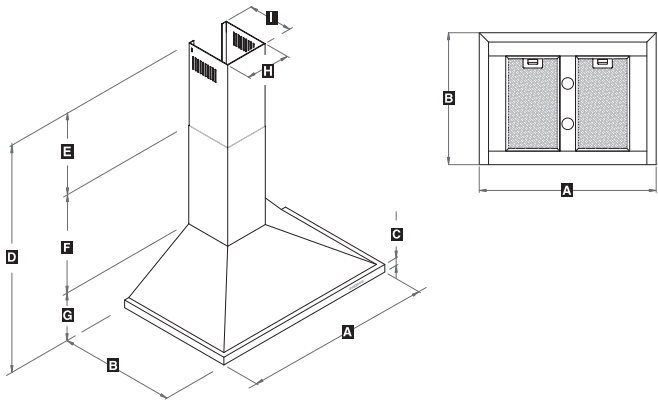

Dimensions		
MODEL#	inches	cm
A	30	76.2
B	22	55.9
C	1.18	3
D	28.94 - 46.65	73.5 - 118.5
E	21.65	55
F	21.65	55
G	5.31	13.5
H	10.43	26.5
I	10.43	26.5

DIMENSION DIAGRAM FOR MODEL JXT8136/JXT8142 ISLAND MOUNT CHIMNEY HOOD

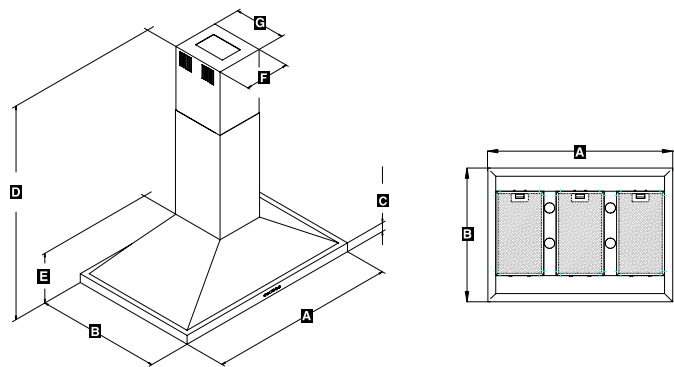


Dimensions				
MODEL#	JXT8136		JXT8142	
	inches	cm	inches	cm
A	35.43	90	42	106.8
B	25.6	65	25.6	65
C	1.18	3	1.18	3
D	28.94 - 46.65	73.5 - 118.5	33.07 - 54.33	84 - 138
E	5.31	13.5	5.31	13.5
F	10.55	26.5	10.35	26.3
G	11	28.0	10.83	27.5

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.


KITCHEN VENTILATION

DIMENSION DIAGRAM FOR MODEL JXT7036 INTEGRATED VENTILATION SYSTEM

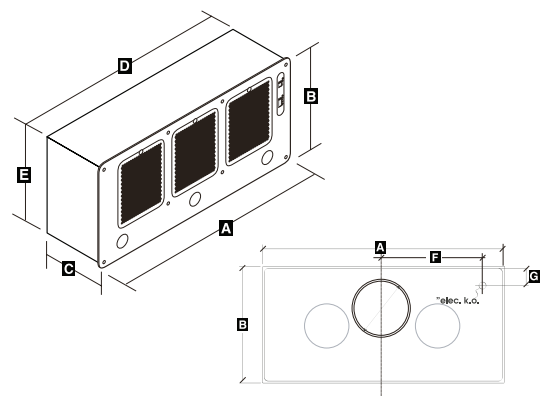


Dimensions		
	inches	cm
A	34 3/8	87.31
B	16 1/16	41.12
C	8	20.32
D	33 3/8	84.77
E	15 1/4	38.74
F	15	38.1
G	2	5.08

JXT7142 liner for 42" installation



JXT7148 liner for 48" installation

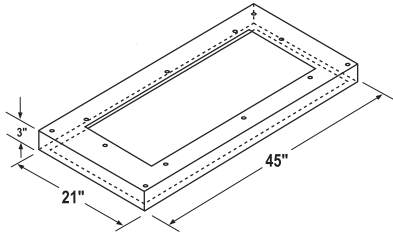

Undercabinet Hoods Features and Specifications						
Model #	JXT5836AD	UXT5436AD	UXT5236AD	JXT5830AD	UXT5430AD	UXT5230AD
	36"			30"		
Overall Width (in)	36	36	36	30	30	30
Overall Depth (in)	22	22 1/4	22 1/4	22	22 1/4	22 1/4
Rating (CFM) ^A	400	400	300	400	400	300
Blower(s)	Single	Single	Single	Single	Single	Single
Electronic Touch Controls	•	•		•	•	
Slide Controls			•			•
Speed Settings	3	3	3	3	3	3
Delayed Shutoff for Fan & Lights	•	•		•	•	
Filterless Self-Clean Model		•	•		•	•
Clean Filter Indicator	•			•		
Dishwasher Safe Aluminum Mesh Filters	•			•		
Lighting Levels	2	2	1	2	2	1
Lighting Type	50W Halogen	50W Halogen	Incandescent	50W Halogen	50W Halogen	Incandescent
Number of Lights (bulbs included)	2	2	2	2	2	2
Discharge Size/Direction	3-Way Convertible	3-Way Convertible	3-Way Convertible	3-Way Convertible	3-Way Convertible	3-Way Convertible
Optional Ductless Installation ^B	•	•	•	•	•	•
Optional Ductless Installation Kit		HRECUXT36	HRECUXT36		HRECUXT30	HRECUXT30
Replacement Carbon Filters	JFLTRC5836	HCFLTUXT36	HCFLTUXT36	JFLTRC5830	HCFLTUXT30	HCFLTUXT30
Sleek Curved Styling	•			•		
Color Indicators (add to end of model number) B=black, W=white, Q=bisque S=stainless steel	B,W,S	B,W,Q,S	B,W,Q,S	B,W,S	B,W,Q,S	B,W,Q,S
Generic Model		•	•		•	•
Available in Canada	•	•	•	•	•	•
Approximate Shipping Weight (lbs./kg)	35 / 16	31 / 14	31 / 14	32 / 14.5	31 / 14	31 / 14



- Feature included.
- A. Ducting configurations and length can affect airflow ratings. Ratings shown are based on hoods with correctly installed ducting.
- B. No conversion kit is required for ductless installation for JXT5836 and JXT5830 model hoods. Order carbon filters referenced in chart above that snap into the hood. For UXT5436, UXT5236, UXT5430 and UXT5230 model hoods order kits and replacement carbon filters referenced in chart above for ductless installation. It is recommended to always exhaust air outside of the home if possible as the hood is most effective and efficient as an exhaust unit.

IMPORTANT: Cutout Dimensions Are Critical. Refer to installation instructions packaged with product BEFORE making cutouts.


IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

UNDER CABINET HOOD DIMENSION DIAGRAMS

Models UXT5230, 5236, 5430, 5436

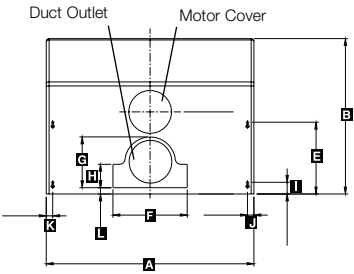


Rear View



Dimensions		
Models	UXT5230, 5236, 5430, 5436	
	inches	cm
A	30 or 36	79.1 or 91.1
B	22 1/4	56.4
C	6	15
D	15 5/8	39.8
E	10 1/4	26.05
F	10 1/2	27
G	7 1/4	18.4
H	3 3/8	8.5
I	1 3/4	4.25
J	1	2.35
K	1	2.35
L	7/8	2.3
M	11	28
N	10	25.2
O	1/2	1.15
P	3	7.8

HV303/HV363 DOWNDRAFT VENTILATION DIMENSION DIAGRAMS






PRODUCT DIMENSIONS (in/cm)	
F	2/5.1
M	30/76.2 or 36/91.4
N	26 1/4/66.7 or 32 1/4/81.9
O	29 1/2/74.9
P	7/17.8

NOTE: Countertop cutout depth = cooktop cutout depth + 1 3/4".

TELESCOPING DOWNDRAFT VENTILATION FEATURES AND SPECIFICATIONS

MODEL #	HV303	HV363
	30"	36"
Overall Height (in)	29 1/2	29 1/2
Overall Width (in)	30	36
Overall Depth (in)	7	7
Rating (cfm)	500	500
Variable-Speed Fan	•	•
Touch Activated	•	•
Telescoping Operation	•	•
Two Washable Aluminum Grease Filters	•	•
Vertical or Horizontal	•	•
Exterior Venting	•	•
Recommended For Use	•	•
With Electric Cooktops Only	•	•
Optional White Cap	WC303	WC363
Optional Stainless Steel Cap	SC303	SC363
Available in Canada	•	•
Approximate Shipping Weight (lbs./kg.)	53/24	58/26

Models JXT5830, 5836

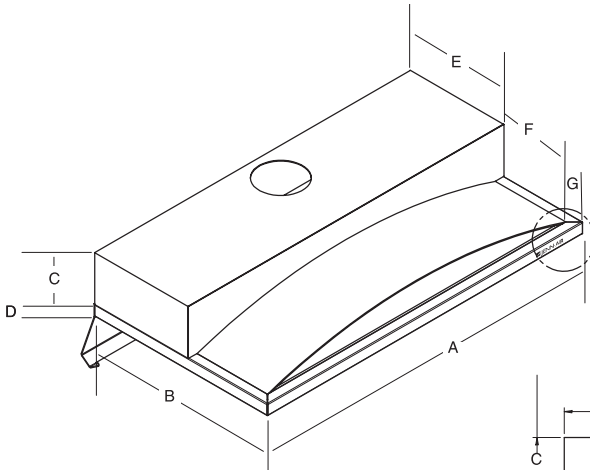

Dimensions				
Models	JXT5830		JXT5836	
	inches	cm	inches	cm
A	30	76.2	36	91.4
B	16.685	50	16.685	50
C	6.69	13	6.69	13
D	1.18	3	1.18	3
E	10.63	27.1	10.63	27.1
F	8.03	20.4	8.03	20.4
G	1	2.5	1	2.5
H	2.36	6	2.36	6
I	2.76	7	2.76	7
J	1.18	3	1.18	3

IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

KITCHEN VENTILATION


Pro-Style™ Hoods Features and Specifications					
Model #	JXT9048CD	JXT9036CD	JXT9136CD	JXT9030CD	JXT9130CD
	48"	36"		30"	
Overall Width (in)	48	36	36	30	30
Overall Height (in)	18	18	10	18	10
Overall Depth (in)	24	24	22	24	22
Rating (CFM)*	1100	1100	650	1100	650
Blower(s)	Dual	Dual	Dual	Dual	Dual
Electronic Touch Controls	•	•	•	•	•
Speed Controls	6	6	6	6	6
Delayed Shutoff for Fan & Lights	•	•	•	•	•
Dishwasher Safe Stainless Steel Baffle Filters	•	•	•	•	•
Lighting Levels	2	2	2	2	2
Lighting Type	50W Halogen	50W Halogen	50W Halogen	50W Halogen	50W Halogen
Number of Lights (bulbs included)	3	2	2	2	2
Food Warming Lamps (bulbs not included) [†]	2	2		2	
Discharge Size/Direction	8" / Vertical	8" / Vertical	3-Way / 6"	8" / Vertical	3-Way / 6"
Pro-Style™ Stainless Steel Styling	•	•	•	•	•
Color Indicator (add to end of model number)					
P=Pro-Style stainless steel	P	P	P	P	P
Available in Canada	•	•	•	•	•
Approximate Shipping Weight (lbs./kg)	103 / 47	88 / 40	61 / 28	80 / 36	55 / 25
Optional Soffit Chimney (JXA Series)C	JXA9048CDP	JXA9036CDP	JXA9036CDP	JXA9030CDP	JXA9030CDP
Width (in)	48	36	36	30	30
Stainless Steel Finish	•	•	•	•	•
Approximate Shipping Weight (lbs./kg)	36 / 16	28 / 13	28 / 13	25 / 11	25 / 11
Optional Wallsplash (JXA9000 Series)	JXA9001CDP	JXA9002CDP	JXA9002CDP	JXA9003CDP	JXA9003CDP
Width (in)	48	36	36	30	30
Stainless Steel Construction	•	•	•	•	•
Two Food Warming/Storage Shelves	•	•	•	•	•
Approximate Shipping Weight (lbs./kg)	30 / 14	25 / 11	25 / 11	23 / 10	23 / 10

- Feature included.
- A. Ducting configurations and length can affect airflow ratings. Ratings shown are based on hoods with correctly installed ducting.
- B. Bulbs for warming lamps must be purchased separately. Use only BR40, size 250W max. infrared bulbs for warming lamps.
- C. Use when installation location has no soffit.

Important: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.


IMPORTANT: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

PRO-STYLE™ HOODS

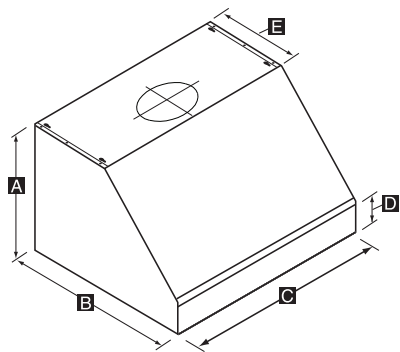


Model	JXT9048CDP	JXT9036CDP	JXT9136CDP	JXT9030CDP	JXT9130CDP
A	18"	18"	10"	18"	10"
B	24"	24"	22"	24"	22"
C	48"	36"	36"	30"	30"
D	4"	4"	4"	4"	4"
E	12"	12"	12"	12"	12"

JXA9000 SERIES SOFFIT CHIMNEY



Model	JXA9048CDP	JXA9036CDP	JXA9030CDP
A	48"	36"	30"
B	12"	12"	12"
C	12"	12"	12"

JXA9000 SERIES WALLSPLASH




Model	JXA9001CDP	JXA9002CDP	JXA9003CDP
A	33 1/2"	33 1/2"	33 1/2"
B	4"	4"	4"
C	48"	36"	30"
D*	14"	14"	14"
E	10"	10"	10"


* Two shelves are included, each shelf is 14". Shelves can be installed horizontally (as shown above) or vertically (as shown on page 68).

DUCTING DATA
DOWNDRAFT-RANGES AND COOKTOPS

TYPICAL COOKTOP DUCT ARRANGEMENTS

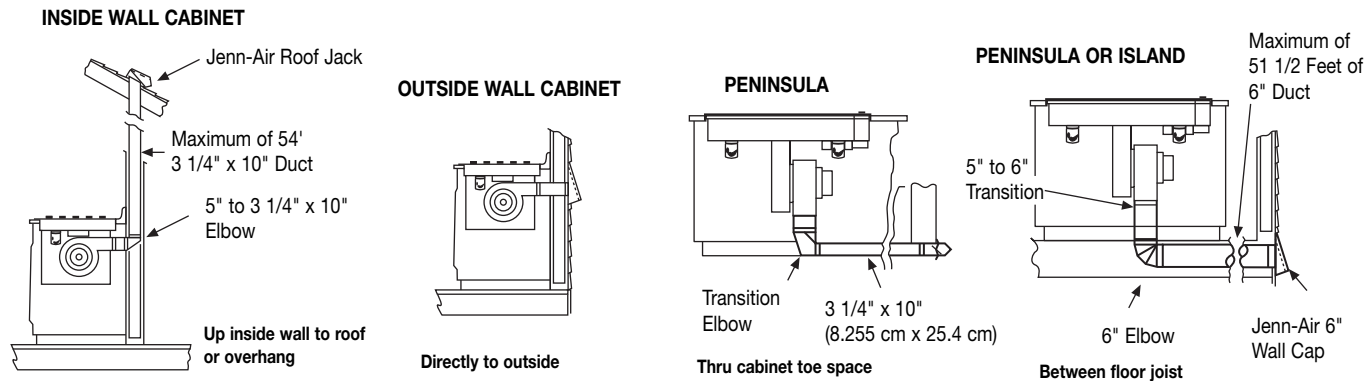

TYPICAL GRILL-RANGE DUCT ARRANGEMENTS

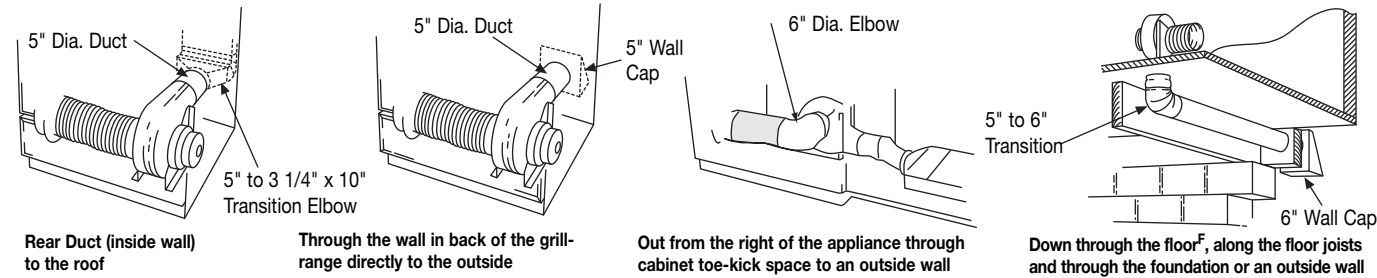

Duct Length Recommendations ^A		
(Maximum) ^B		
	5" Diameter ^C	6" Diameter or 3 1/4" x 10" ^C
All Electric ^D	10'	60'
All Gas ^E	10'	60'

The Long Duct Run

With Jenn-Air's powerful blower, Jenn-Air downdraft grill-ranges and grill-range cooktops can vent up to the equivalent of 60 feet.

Here's how it works.

For duct runs equivalent to 30' or less, install as received. For duct runs equivalent to 31' to 60', simply snap out the restricter ring on the blower inlet housing. See Installation Instructions for specific information.

Grill-Range/Cooktop Ducting Accessories

Model A403 Surface Wall Cap—Single damper; down discharge. Fits 3-1/4" x 10" duct.

Model A405 Surface Wall Cap—Single spring-loaded damper; down discharge. Fits 5" diameter duct. Requires opening 5-1/2" in diameter.

Model A406 Surface Wall Cap—Single spring-loaded damper; down discharge. Fits 6" diameter duct. Requires opening 6-1/2" in diameter.


Model A456 Transition—5" to 6" round duct.

Important: Because of continuing product improvements, Jenn-Air reserves the right to change specifications without notice. Dimensional specifications are provided for planning purposes only. For complete details see installation instructions packed with product before selecting cabinetry, making cutouts or beginning installation.

Notes:

- A. For venting up to the equivalent of 60', use standard steel ducting and elbows.
- B. IMPORTANT: See installation instructions shipped with product before selecting island cabinetry, making cutouts or beginning installation. For best performance, it is suggested that no more than three 90 degree elbows be used with 6" or 3 1/4" x 10" duct. Each foot of metal flex duct counts as two feet of rigid metal duct. Each flex elbow counts as two metal elbows. For longer duct runs of 31' to 60', the restricter ring on the blower inlet housing must be removed. 6" round or 3 1/4" x 10" duct must be used for ducting beyond 10' (up to 60'). Failure to follow ducting recommendations or use recommended ducting accessories may result in substandard performance.
- C. Count each 90 degree elbow as 5' of duct.
- D. When venting electric ranges or cooktops, 5" diameter round duct may be used to vent straight out the back of appliance and directly through the wall for runs of 10' or less.
- E. When venting dual-fuel ranges and gas cooktops, 5" diameter round duct must be used for runs of 10' or less.
- F. When installing through a slab, it is essential that the system be properly calculated, designed and installed before the house is built, when the slab is poured.

WALL CAPS/ THERMAL BREAKS

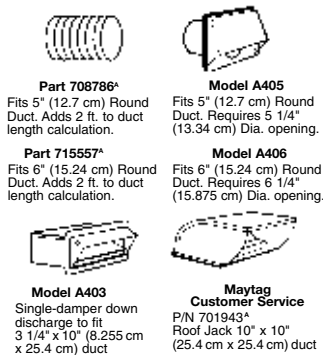

A. The above model numbers may be ordered through your authorized service dealer.

Do	Don't
Use 5" (12.7 cm), 6" (15.24 cm), or 3 1/4" x 10" (8.255 cm x 25.4 cm) pipe as recommended for your model	Use 4" (10.16 cm) dryer vent pipe or flex duct*
Use recommended wall caps	Use laundry-type wall cap
Use no more than one 90° elbow with five inch (12.7 cm) duct or three 90° elbows with six inch (15.2 cm) or 3 1/4" x 10" (8.255 cm x 25.4 cm) duct	Overrun your system with too many bends and turns
Duct system to the outside	Vent into an attic or crawl space, walls and concealed space of building
Mix 6" (15.24 cm) duct and 3 1/4" x 10" duct (8.255 cm x 25.4 cm) within the same system if necessary	Reduce back to 5" (12.7 cm) system after using 6" (15.24 cm) or 3 1/4" x 10" (8.255 cm x 25.4 cm)
Tape all joints securely with several wraps of tape	Butt joints, always use male-female connections in direction of flow
Use one unit per duct system	Exhaust more than one unit into a single system

* Although not recommended, 5" or 6" metal flex duct may be used. Due to the irregular surface of flexible ducting, each foot of flex duct counts as two (2) feet of regular metal duct. Also each elbow made in flex duct would count twice as much as standard metal elbow. The best idea with flexible ducting is to keep it as short and as straight as possible.



PLATINUM WARRANTY*

All Jenn-Air® appliances carry a minimum warranty of 1st year free parts and labor, plus a 2nd year free parts only. Warranties begin on the date of purchase. The chart below details specific warranties by product category. The years after date of original purchase are listed across the top.

PRODUCT	YEARS								
		1	2	3	4	5	10	12	Lifetime
COOKTOP, WALL OVEN, CONVENIENCE OVEN, RANGE <i>(Gas or Electric)</i>	PARTS	All	All	Glass-Ceramic Cooktop Due to Thermal Breakage; Electric Heating Elements Including Surface Elements, Bake and Broil Elements; Electronic Controls; Gas Sealed Burners					
	LABOR	Yes							
WARMING DRAWER	PARTS	All	All						
	LABOR	Yes							
COOKING ACCESSORIES	PARTS	All	All	Glass-Ceramic Top Due to Thermal Breakage; Electric Surface Heating Elements; Gas Sealed Burners					
	LABOR	Yes							
COMBINATION MICROWAVE/WALL OVEN	PARTS	All	All	Electronic Control Panel Components; Electric Bake and Broil Elements; Microwave Energy Components					
	LABOR	Yes							
BUILT-IN MICROWAVE OVER-THE-RANGE MICROWAVE	PARTS	All	All	Limited to Magnetron Tube, Touch Pad Assembly, Microprocessor					
	LABOR	Yes	Yes						
HOOD	PARTS	All	JXT Models						
	LABOR	Yes							
DISHWASHER	PARTS	All	All	All	Microprocessor and Touch Pad Assemblies, Cabinet Front Panel Rust, Wash System Pump and Motor, Wash Arms and Sensor Package, DuraGuard® Rack Finish				
	LABOR	All	Door Liner (if liner fails due to water leak) Lifetime Full Warranty Dishwasher Replacement (if tub fails due to water leak) Lifetime Full Warranty						
BUILT-IN REFRIGERATOR	PARTS	All	All	All	Sealed Refrigeration System (consisting of the Compressor, Evaporator, Condenser, Drier and Connecting Tubing) which fails in normal home use.				
	LABOR	All	All	All	Mileage and transportation charges, if required, shall be the responsibility of the owner.				
REFRIGERATOR WINE CELLAR, UNDER COUNTER REFRIGERATOR, ICE MAKER	PARTS	30 Days for Water Filter Cartridge	All	Limited to Interior Cabinet Liner (exclusive of door liner) and Sealed Refrigeration System					
	LABOR	Yes	(Installation labor only) Limited to Interior Cabinet Liner (exclusive of door liner) and Sealed Refrigeration System						
COMPACTOR	PARTS	All	All						
	LABOR	Yes							
SMALL APPLIANCES MIXER BLENDER	PARTS	Hassle-Free Replacement							
	LABOR								

*Warranty stated covers only those models specified in this catalog. See a Jenn-Air® dealer for model specific warranty information.

OWNER'S RESPONSIBILITIES

The customer has certain responsibilities which must be satisfied to qualify for coverage under these warranties. For all products, the owner is responsible for providing normal care and maintenance in accordance with the Use & Care Instructions, providing proof of purchase on request, proper installation and making the appliance reasonably accessible for service. For refrigerators, the owner will pay for service calls or trip charges to analyze sealed system defects, including related labor costs and mileage and/or transportation, if required, for the service second through fifth years.

WARRANTY SERVICE

Under the full warranty, service must be performed by an Authorized Jenn-Air Service Contractor. To obtain service, contact the dealer from whom the unit was purchased, an authorized Service Contractor, or contact Jenn-Air Customer Assistance, c/o Maytag Appliances Sales Company, P.O. Box 2370, Cleveland, TN 37320, 1-800-JENN-AIR (U.S. and Ontario) or 1-423-472-3333. Please include model number, serial number and date of original retail purchase in all correspondence. Service will be provided during normal business hours. All replacement parts assume the unused portion of this warranty. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

CANADIAN RESIDENTS

This warranty covers only an appliance installed in Canada that has been certified to a National Standard of Canada unless the appliance is brought into Canada due to transfer of residence from the United States to Canada.



jennair.com