



ELECTRICAL

A 115 volt, 60 Hz, 15 amp electrical supply is required. The supply circuit for this appliance must be protected by a 15 amp fuse or circuit breaker. It is recommended that a separate circuit, serving only this appliance, be provided.

All Sub-Zero 600 Series units are equipped with a 6' (1.8 m) power supply cord with a 3-prong grounding plug and it must be plugged into a mating 3-prong grounding type wall receptacle. Follow the National Electrical Code and local codes and ordinances when installing the receptacle. Refer to the following illustrations and charts for exact specifications.

PLUMBING

For units with an automatic ice maker, rough in the water supply line. Connect a 1/4" OD copper line to the house supply, being sure to use an easily accessible shut off valve between the supply and the refrigerator.



Do not use "self-piercing" valves. A saddle valve kit (part number 4200880) is available from your Sub-Zero dealer.

IMPORTANT NOTE: A line filter is required when water conditions have a high sediment content. The ice maker operates on water pressure of 20 psi (1.4 bar) to 100 psi (6.9 bar). In some cases a reverse osmosis water filter system may not be able to maintain the minimum water pressure consistently.

The water line should be routed up through the floor within 1/2" (13) from the back wall and no higher than 3" (76) off the floor. If you have to come through the wall, make sure the water line is no more than 3" (76) from the floor.

Regardless of the routing, allow 3' (1 m) of excess copper tubing to remain outside the wall or floor for easy connection to the unit. Refer to the following illustrations and charts for exact specifications.

MODELS 601R, 601RG AND 601F

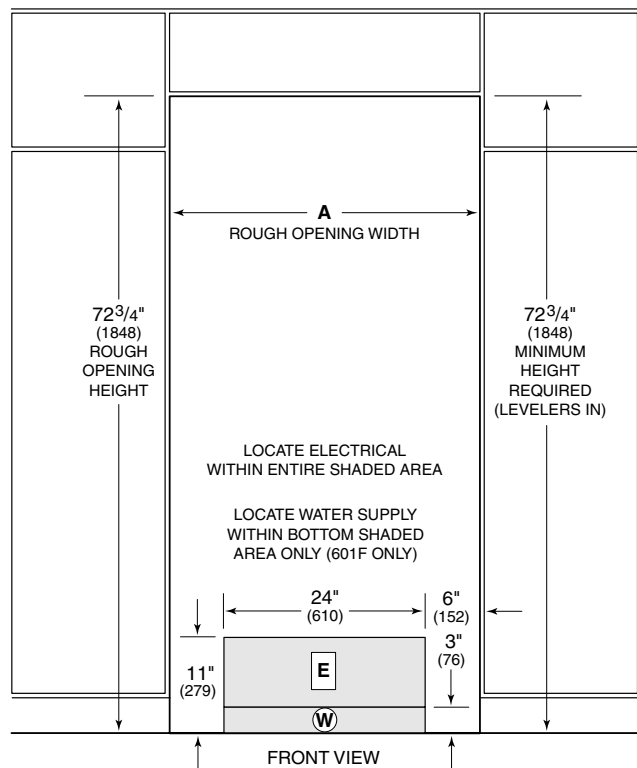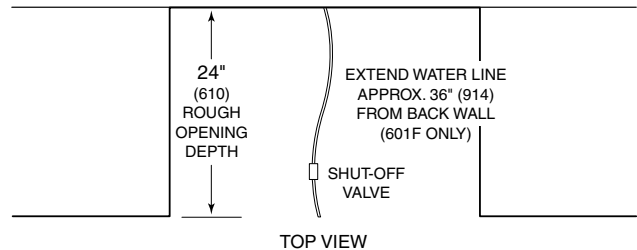


	Finished Rough Opening Width (A)
Model 601R	35 1/2" (902)
Model 601RG	35 1/2" (902)
Model 601F	35 1/2" (902)

NOTE: Dimensions in parentheses are in millimeters.

- ▶ Dimensions in parentheses are in millimeters unless otherwise specified.
- ▶ Refer to the Sub-Zero Design Guide pdf file for additional specifications.



MODELS 611, 611G, 650, 650G, 561, 661, 642, 680, 685, 632, 690 AND 695

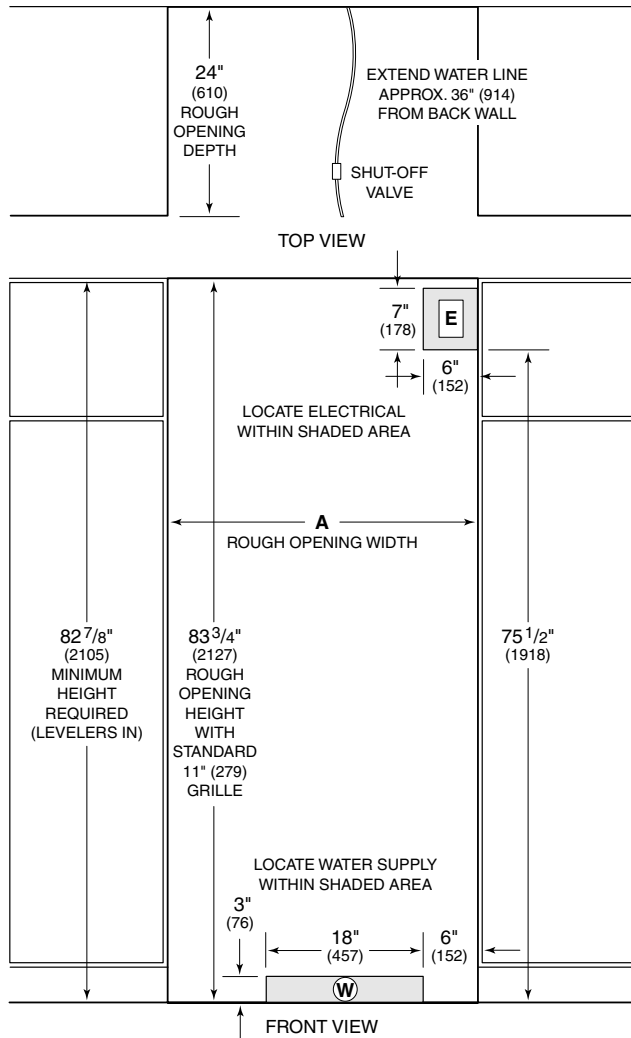

Finished Rough Opening Width (A)

Model 611	29 1/2" (749)
Model 611G	29 1/2" (749)
Model 650	35 1/2" (902)
Model 650G	35 1/2" (902)
Model 561	35 1/2" (902)
Model 661	35 1/2" (902)
Model 642	41 1/2" (1054)
Model 680	41 1/2" (1054)
Model 685	41 1/2" (1054)
Model 632	47 1/2" (1207)
Model 690	47 1/2" (1207)
Model 695	47 1/2" (1207)

NOTE: Dimensions in parentheses are in millimeters.

- ▶ Dimensions in parentheses are in millimeters unless otherwise specified.
- ▶ Refer to the Sub-Zero Design Guide pdf file for additional specifications.