

# **BUILDER QUOTE PRODUCT PLANNING SPECS**

Important: Information is preliminary and should be used for planning purposes only. Consult with your BSH Builder Sales rep or Thermador.com for final specifications.

# T24ID900LP 24-INCH BUILT-IN FREEZER COLUMN WITH ICE & WATER

FREEDOM® COLLECTION, PANEL-READY, LEFT-HAND **DOOR SWING** 

# **AVAILABLE OCTOBER 2017**









Image shown is not final

### ALSO AVAILABLE:

T24ID900RP - Right-Hand Door Swing

## **FEATURES & BENEFITS**

- Freedom® Hinge enables true flush design
- Open Door Assist automatic door opening with just a slight push or a pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES	
Freezer	-9°F (-23°C) to 7°F (14°C)
Super Freeze	-9°F (-23°C) for approximately 52 hours

GENERAL PROPERTIES		
Panel Ready	Yes	
Reversible Door Swing	No	
SoftClose® Drawers	Yes	
Carbon Air Filter	No	
Lighting	New Bar ALL LED Sidewall and Theater Lighting	
Full Width / Adjustable Shelves	Yes / Yes	
Freezer Shelves	4	
Shelf Material	Glass w/Aluminum Profile	
Full Extension Drawers @ 115° Door Opening Angle	Yes	
Full Extension Drawers @ 90° Door Opening Angle	No	
General Use Drawer	2	
Door / Gallon Bins	0 / N/A	
External LED Proximity Sensor	Yes	
Oversized Dispenser Opening	Yes	
Chilled Water, Crushed and Cubed Ice	Yes	
Rapid Water Replenishment System	Yes	
Ice Maker with Diamond Ice System	Yes	
Door Open Alarms	Yes	
Open Door Assist	Yes	
Special Modes	Yes	
CAPACITY		
Total Unit Gross Capacity (cu. ft.) – AHAM	11.3 cu. ft.	
Freezer Gross Capacity (cu. ft.)	11.3 cu. ft.	
TECHNICAL DETAILS		
Watts (W)	565 W	
Current (A)	15 A	
Volts (V)	120 V - 3 prong	
Frequency (Hz)	60 Hz	
Power Cord Length (in.)	139	
Plug Type	120V-3 Prong	
DIMENSIONS & WEIGHT		
Appliance Dimensions (H x W x D) (in.)	84" x 23 <b>3/4</b> " x 24"	
Required Cutout Size (H x W x D) (in.)	84" x 24" x 25"	
Net / Gross Weight (lbs)	325 / 357 lbs	
EFFICIENCY		
ENERGY STAR® Qualified	Yes	
Annual Energy Consumption	457	

<sup>\*</sup>Height adjustable + / -1/2" (+ / -13 mm)

Page 1 of 3 05 / 17


<sup>\*\*</sup>Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and



# **BUILDER QUOTE PRODUCT PLANNING SPECS**

WARRANTY		
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year	
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year	
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year	
Limited Warranty for Stainless Steel Rust-Through	Lifetime	

#### **CUTOUT DIMENSIONS**




# Furniture return

**A**: Area for installation of power connection.


**B**: Area for running the water line. It is recommended that the waterbox is placed adjacent to the installation cavity, so that it can be accessed for service without uninstalling the appliance. If this is not possible, place the recessed waterbox adjacent to the water supply socket elevated at the heights as referenced in areas A and B.

C: Niche depth depends on kitchen design.


**Note**: The cutout for the dispenser unit must be horizontally 12" and vertically aligned (centered).



# **TOP VIEW CLEARANCE**

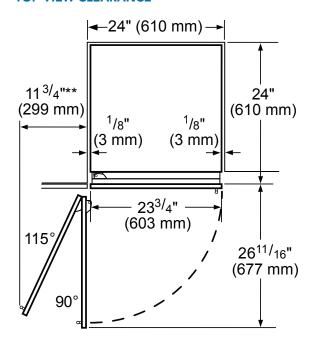


- \*\* Door handle must be added to this dimension
- Depends on the thickness of the furniture door.
  3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).





# **BUILDER QUOTE PRODUCT PLANNING SPECS**

### **PANEL DIMENSIONS**

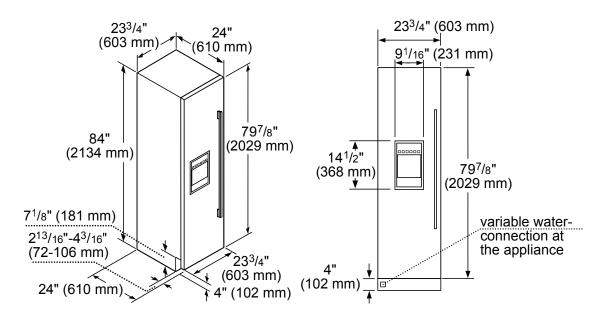

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 3 of 3 05 / 17