



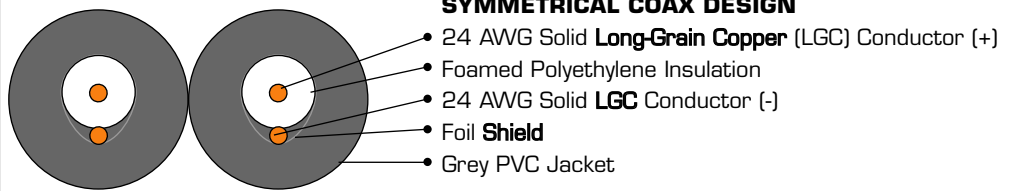

MINI-1 (3.5mm to/from RCA) 3.5mm MINI ADAPTERS

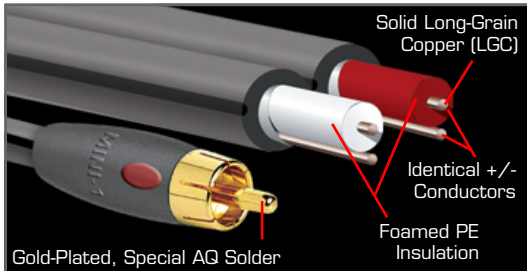

SOLID LONG-GRAIN COPPER (LGC): Solid conductors prevent strand interaction -- the greatest single source of cable distortion. The less complicated grain structure and fewer impurities within LGC copper significantly reduce distortion compared to normal high-purity copper.

IDENTICAL +/- CONDUCTORS: Conventional cables use the cable's shield as an inferior negative conductor. Mini-1 uses a negative conductor identical to the positive center conductor. Mini-1 also has 100% shield coverage to ensure noise-free performance.

FOAMED POLYETHYLENE INSULATION: Superior PE insulation, foamed to include as much "air" as possible, provides superior clarity and dynamics.

AUDIOQUEST SOLDER: Gold-plated Duracon-insulated plugs are soldered to Mini-1 with specially formulated AQ Solder.